



PYLE[®] Home 2013

Visit Us @ pyleaudio.com



PRT35I

PYLE[®]

Complete Product Catalog

Along with tomorrow's technology, Pyle Home has the classic styles you've been looking for – Today! Create a beautiful new home theater system or just upgrade your current entertainment area. We can provide you with a Hi-Definition Flat Panel TV, Ultra Thin Tilt TV Wall Mount, Digital Home Theater Sound Tower with iPod Dock, Home Stereo Power Amplifier with all the necessary cable accessories and much, much more! Pyle has audio and video equipment to prepare you for the next generation. Make your house into Pyle Home



PYLE[®]
Home



2013

Complete Product Catalog

Contents:

LCD TVs	4
In-Wall Mount LCD	5
Home Projectors	6
Projectors Screens	8
HDTV Kits & TV Wall Units.....	10
Flat Panel TV Wall Mounts	11
Video Converters	20
LCD Connections & Cleaning Kits	21
HDMI & Multi-Component Wall Plates	22
HDMI Cables & Adapters	23
Home Theater Systems & Sound Bars	25
Home Theater Tower System	27
iPod/iPhone/iPad Docking Systems	29
Portable Mini Speakers	32
Shower Clock Radios & Vintage Turntable Systems	35
Nostalgic Home Jukebox Systems	39
Authentic Classical Themed Phone & Retro Handheld Systems	40
Wireless Microphone & Headphone Amplifier Systems & Noise-Canceling Headphones	42
Home Audio Receivers & Stereo Power Amplifiers	45
In-Ceiling Speaker Brackets	55
In-Wall Speaker Systems	60
Outdoor / Indoor Waterproof Speaker Systems	63
PA Horns Speakers	66
Outdoor Decorative Speakers/In-Wall Volume Controls	67
Meters & Testing Equipment	69

Visit Us @ pyleaudio.com

Complete Product Catalog

PTC157LC 15.6" Hi-Definition Flat Panel LCD TV

- 15.6" LCD Screen
- NTSC Auto Color System
- 16:9 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 262K Colors
- 1366 x 768 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 400:1 Contrast Ratio
- 220 Brightness cd/m2
- Progressive Scan CCD, V-Chip
- 90° Horizontal/ 45° Vertical Viewing Angle
- Built-In Speakers 2 x 3W

- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, S-Video, VGA, HDMI, YPbPr Ports, Headphone
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/240 Voltage Selectable
- 35W Power Consumption
- Dimensions: 15.8" W x 12.9" H x 3.6" D
- Weight: 7.92 lbs



PTC42LC 42" Hi-Definition LCD TV

- 42" Hi-Definition LCD TV
- NTSC Auto Color System
- 16:9 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 16.7M Colors
- 1920 x 1080 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i, 1080P
- 1200:1 Contrast Ratio
- 500 Brightness cd/m2
- Progressive Scan CCD, V-Chip
- 178° Horizontal/ 178° Vertical Viewing Angle
- Built-In Speakers 2 x 8W

- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, S-Video, VGA, HDMI*2, YPbPr Ports
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/240 Voltage Selectable
- 220 Watts Power Consumption
- Dimensions: 41.9" W x 31.7" H x 12.2" D (Base) 3.5" D (LCD)
- Weight: 63.8 lbs



PTC20LD 19" Hi-Definition LCD Flat Panel TV w/ Built-In DVD Player

- 19" LCD Screen
- Built-In Progressive Scan DVD Player
- Compatible Formats: DVD,VCD,MP3,CD,CD-R,CD-RW
- NTSC Auto Color System
- 16:10 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 16.2M Colours
- 1440 x 900 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 500: 1 Contrast Ratio
- 400 Brightness cd/m2
- Progressive Scan CCD, V-Chip
- 160° Horizontal/ 135° Vertical Viewing Angle

- Built-In Speakers 2 x 10W
- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, HeadPhone, S-Video, VGA, HDMI, YPbPr Ports
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/120 Voltage Selectable
- 70W Power Consumption
- Dimensions: 19.5" W x 16.8"H x 2.8"D
- Weight: 13.4 lbs



PTC19LC 19" Hi-Definition LCD Flat Panel TV

- 19" LCD Screen
- NTSC Auto Color System
- 16:10 (Widescreen) Screen Aspect Ratio
- Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners
- 16.2M Colours
- 1440 x 900 High Resolution
- HDTV Compatible: 480i, 480p, 720p, 1080i
- 500: 1 Contrast Ratio
- 400 Brightness cd/m2
- 160° Horizontal/ 135° Vertical Viewing Angle
- Built-In Speakers 2 x 10W

- Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included)
- Multi Language OSD (English/French/Spanish)
- Multiple Input Options: AV, HeadPhone, S-Video, VGA, HDMI, YPbPr Ports
- RF Cable Input
- Full Function Wireless Remote Control
- AC Input: 110V/220 Voltage Selectable
- 60W Power Consumption
- Dimensions: 19.5" W x 16.8"H x 2.8"D
- Weight: 11 lbs





PLVW9IW-PLVW10IW-PLVW15IW-PLVW17IW-PLVW19IW

In-Wall Mount TFT LCD Flat Panel Monitor For Home & Mobile Use W/VGA & RCA Inputs

- BNC Connector
- 300:1 Contrast Ratio
- Brightness: 350cd/m²
- Power Supply: DC 12V
- 16:9 Screen Aspect Ratio
- 1280 x 800 High Resolution
- PAL/NTSC Auto Color System
- Video Input: RCA, VGA & VESA
- TFT LCD Wall-Mountable Screen
- Viewing Angle: 40° Up - 70° Down - 70° Left & Right
- Wireless Remote Control and In-Wall Mounting Bracket Included

PDH14 14" Widescreen High Resolution Portable Monitor w/ Built-In DVD, MP3, MP4 Players, USB Port & SD Card Slot Readers

- ID3 Tag Compatible
- High Resolution: 1366 x 768
- Average Battery Life 2 Hours
- Built-In Rechargeable Battery
- Support USB Key/SD/MMC MS Card
- Supports Multi Regional PAL/NTSC
- 14" High Resolution TFT LCD Screen
- RCA Audio/Video Line Input & Output
- Wireless Full Function Remote Control
- Adjustable Viewing Angle & Screen Rotation
- Compatible with DVD, DVD-R, DVD-RW, VCD, MP3, MP4 (720P & Under), CD-R, CD-RW, JPEG, JPG, DIVX, AVI, MPG, VOB, RMVB
- Dimensions: 14.56" x 10.23" x 1.96"



PDH9 9" Widescreen High Resolution Portable Monitor w/ Built-In DVD, MP3, MP4 Players, USB Port & SD Card Slot Readers

- ID3 Tag Compatible
- High Resolution: 600 x 234
- Works with iPods/MP3 Players
- Supports Multi Regional PAL/NTSC
- 9" High Resolution TFT LCD Screen
- Support USB Key/SD/MMC MS Card
- RCA Audio/Video Line Input & Output
- Wireless Full Function Remote Control
- 2 Hour Average Life Built-In Rechargeable Battery
- Adjustable/Foldable Viewing Angle Screen with Rotation
- Compatible with DVD, DVD-R, DVD-RW, VCD, MP3, MP4 (720P & Under), CD-R, CD-RW, JPEG, JPG, DIVX, AVI, MPG, VOB, RMVB
- Dimensions: 9.45" x 6.9" x 1.57"



USB Flash & SD Card Not Included

PDH7 7" Widescreen High Resolution Portable Monitor w/ Built-In DVD, MP3, MP4 Players, USB Port & SD Card Slot Readers

- ID3 Tag Compatible
- High Resolution: 480 x 234
- Supports Multi Regional PAL/NTSC
- 7" High Resolution TFT LCD Screen
- Support USB Key/SD/MMC MS Card
- RCA Audio/Video Line Input & Output
- Wireless Full Function Remote Control
- 2 Hour Average Life Built-In Rechargeable Battery
- Adjustable/Foldable Viewing Angle Screen with Rotation
- Compatible with DVD, DVD-R, DVD-RW, VCD, MP3, MP4 (720P & Under), CD-R, CD-RW, JPEG, JPG, DIVX, AVI, MPG, VOB, RMVB
- Dimensions: 7.9" x 6.3" x 1.18"



USB Flash & SD Card Not Included

Complete Product Catalog

PRJHD198 High-Definition Home Theater Multimedia Widescreen Projector - Up To 100-Inch Viewing Screen, Built-In Speakers, USB/SD Media Player & PC Connection Compatible

- Built-in Speaker
- Contrast: 800:1
- Resolution: 800 x 600
- Machine Power: 200 Watt
- Screen Size: 60-100 Inch
- Aspect Ratio: 16:9 or 4:3
- Lamp Life: 6000-8000 Hours
- Illumination Level: 1800 Lumen
- Projection System: 5 Inch TFT LCD
- Supports: (1024 x 768) 720p, 1080p

- Working Voltage: AC 90-110 V 50 HZ
- Projection Lighting Source: 6000-8000 Hours
- Supports International Signal Systems & Languages
- Lens: 3 Flake Broad Band Film Plating & High Definition Focus
- Interface: AV, S-video, VGA, HDMI, Component Video, SCART, USB/SD Media Reader, Audio Input & Outputs
- Dimensions: 11"H x 6"W x 15"D



PRJHD66 High-Definition Home Theater Multimedia Widescreen Projector - Up To 100-Inch Viewing Screen, Built-In Speakers & PC Connection Compatible

- Contrast: 800:1
- Built-in Speaker
- Aspect Ratio: 16:9 or 4:3
- Screen Size: 60-100 Inch
- Machine Power: 200 Watt
- Lamp Life: 6000-8000 Hours
- Illumination Level: 1800 Lumen
- Projection System: 5 Inch TFT LCD
- Working Voltage: AC 90-110 V 50 HZ

- Projection Lighting Source: 6000-8000 Hours
- Resolution: (640 x 480) Supports 720p & 1080i
- Signal System: Supporting International System
- Supports International Signal Systems & Languages
- Lens: 3 Flake Broad Band Film Plating & High Definition Focus
- Interface: AV, VGA, HDMI (x2), Component Video & Audio Outputs
- Dimensions: 11"H x 6"W x 15"D



PRJLE60 Portable LED Projector for Gaming TV Shows Movies and Sports at Up To 100 Inches

- Projector Uses LED Lighting For Maximum Brightness and Clarity
- 3.2" TFT LCD Renders Your Video In Beautiful Color
- 50 W Lamp Lasts Up To 20000 Hours
- Perfect for Video Games, TV Shows, Movies, or Sports
- Lens Focus: 125 mm
- Native Resolution: 640x480
- Supports 800x600 and 1024x768 Inputs
- Inputs: Component Video, VGA, HDMI

- Brightness: 2500 Lumens (ANSI)
- Up To 15 Degrees Trapezoidal Correction
- Built-In Stereo Speakers
- Supports Projector Screens From 50 to 100 Inches
- Includes Remote Control, Power Cable, AV Cable, and Lens Tissue Wipes
- Runs On 110-240 V / 50-60 HZ



PRJLE55 High-Definition LED Widescreen Projector with Up To 100-Inch Viewing Screen, Built-In Speakers & Supports 1080p

- Contrast: 800:1
- Manual Focus Lens
- Aspect Ratio: 16:9 or 4:3
- Illumination Level: 1800 Lumen
- Projection Lighting Source: LED
- Display Source: 7" Single LCD Panel
- Viewing Screen Size: 32"- 100" Inches

- Working Voltage: AC 110V - 220V 50/60HZ
- Built-in Speaker & Earphone Audio Output
- Supports International Signal Systems & Languages
- Native Resolution: 800 x 480 Maximum Support 1080p
- Interface: AV(RCA), HDMI, VGA, S-Video, Component Video, Audio Inputs & Outputs
- Dimensions: 17.16"H x 11.25"W x 4.92"D



PRJLE44 High-Definition LED Widescreen Projector - Up To 100-Inch Viewing Screen, Built-In Speakers

- Contrast: 800:1
- Manual Focus Lens
- Aspect Ratio: 16:9 or 4:3
- Interface: AV(RCA), HDMI, VGA
- Illumination Level: 1800 Lumen
- Projection Lighting Source: LED
- Display Source: 7" Single LCD Panel
- Viewing Screen Size: 32"- 100" Inch

- Working Voltage: AC 110V-220V 50/60HZ
- Built-in speaker & Earphone Audio Output
- Signal System: Supporting International System
- Supports International Signal Systems & Languages
- Native Resolution: 800 x 480, Maximum Support 1080p
- Dimensions: 17.16"H x 11.25"W x 4.92"D



PRJLE33 Portable LED Projector for Gaming TV Shows Movies and Sports at Up To 100 Inches / Supports HD Input



PRJLE22 High-Definition LED Widescreen Projector with Up To 100-Inch Viewing Screen, Built-In Speakers & Supports 1080p



For More Information Visit Us @ pyleaudio.com

PRJV66 Home Theater Multimedia Widescreen Projector - Up To 100-Inch Viewing Screen, Built-In Speakers & PC Connection Compatible

- Contrast:600:1
- Built-in Speaker
- Lamp Life:6000hours
- Screen Size: 60-100 Inch
- Machine Power: 200 Watt
- Aspect Ratio: 16:9 or 4:3
- Illumination Level: 1200 Lumen
- Interface:AV, S-Video,VGA & RF

- Projection System: 5 Inch TFT LCD
- Working Voltage: AC 90-110 V 50 HZ
- Resolution:640*480 Support:800*600
- Projection Lighting Source: 6000-8000 Hours
- Supports International Signal Systems & Languages
- Dimensions: 11"H x 6"W x 15"D



PRJ3D69 High-Definition Widescreen Projector with Up To 200-Inch Viewing Screen, Built-In Speakers, 3D Capable & Supports 1080p

- Contrast: 1000:1
- Manual Focus Lens
- Aspect Ratio: 16:9 or 4:3
- Screen Size: 32"-200" Inch
- Illumination Level: 1700 Lumen
- Native Resolution : 1920 x 1080
- Projection Lighting Source: LED

- Working Voltage: AC 110V/12V-2A
- Display Source: 7" Single LCD Panel
- Built-in speaker & Earphone Audio Output
- Supports International Signal Systems & Languages
- Interface: AV, S-Video, HDMI, VGA, Component Video, Audio Inputs & Outputs
- Dimensions:6.30" H x 12.99" W x 16.14" D



PRJ3D79 High-Definition Widescreen Projector with Up To 200-Inch Viewing Screen, Built-In Speakers & Supports 1080p

- Contrast: 800:1
- Manual Focus Lens
- Aspect Ratio: 16:9 or 4:3
- Screen Size: 32" - 200" Inch
- Native Resolution : 1920 x 1080
- Projection Lighting Source: LED
- Illumination Level: 1700 Lumen

- Working Voltage: AC 110V/12V-2A
- Display Source: 5" Single LCD Panel
- Built-in speaker & Earphone Audio Output
- Supports International Signal Systems & Languages
- Interface: AV(RCA), HDMI, VGA, S-Video, Component Video, Audio Inputs & Outputs
- Dimensions:4.724"H x 10.236"W x 12.795"D inches



PRJLE84H High-Definition LED Widescreen Projector with Up To 120-Inch Viewing Screen, Built-In Speakers & Supports 1080p

- Contrast: 2000:1
- Manual Focus Lens
- Aspect Ratio: 16:9 or 4:3
- Illumination Level: 1800 Lumen
- Projection Lighting Source: LED
- Screen Size: 60" - 120" Inches
- Display Source: 7" Single LCD Panel
- Working Voltage: AC 110V/220V 50/60HZ

- Built-in speaker & Earphone Audio Output
- Signal System: Supporting International System
- Supports International Signal Systems & Languages
- Native Resolution: 1280 x 800 - Maximum Support 1080p
- Interface:AV(RCA), HDMI, VGA, YPBPR, HD, USB, & AUDIO IN



PRJ3D89 High-Definition Widescreen Projector with Up To 200-Inch Viewing Screen, Built-In Speakers, & Supports 1080p

- Contrast: 1300:1
- Manual Focus Lens
- Aspect Ratio: 16:9 or 4:3
- Screen Size: 32" - 200" Inch
- Illumination Level: 1700 Lumen
- Native Resolution : 1920 x 1080
- Projection Lighting Source: LED

- Working Voltage: AC 110V/12V-2A
- Display Source: 5" Single LCD Panel
- Built-in Speaker & Earphone Audio Output
- Supports International Signal Systems & Languages
- Interface: AV, S-Video, HDMI, VGA Component Video, Audio Inputs & Outputs
- Dimensions:4.73"H x 10.24" W x 12.80"D



PRJ3D99TU High-Definition LED Widescreen Projector with Up To 120-Inch Viewing Screen, Built-In Speakers & ATSC TV Tuner

- Contrast:2000:1
- Manual Focus Lens
- Aspect Ratio: 16:9 or 4:3
- Screen Size: 60"- 120" Inch
- Native Resolution: 800 x 600
- Illumination Level: 2800 Lumen
- Projection Lighting Source: LED
- Display Source: 5" Single LCD Panel

- Built-in TV Tuner: HD American ATSC TV
- Working Voltage: AC 110V/60HZ 200 Watt
- Built-in Speakers & Earphone Audio Output
- Supports International Signal Systems & Languages
- Interface: ATSC-TV,HDMI,VGA,AV,S-VIDEO,Component Video
- Dimensions: 5.00"H x 10.24"W x 12.99"D



Complete Product Catalog

PRJS1680 80" (39"Hx69"W) Manual Projector Widescreen Format(16:9) Screen

- Format: 16:9
- View area: 39" x 69"
- Material: Matte White
- Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/
Surface can be cleaned
- Special used for: School /Business/Home
- Package size:4.5" x 5.25" x 79"
- Housing size:3" x 4" x 76"



PRJS1696 96" (47"Hx84"W) Manual Projector Widescreen Format (16:9) Screen

- Format: 16:9
- View area: 47" x 84"
- Material: Matte White
- Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/
Surface can be cleaned
- Special used for: Business/Home
- Package size:5" x 6" x 92"
- Housing size:2.85" x 3.95" x 89.78"



PRJS4372 72" (43"Hx57"W) Manual Projector Standard Format (4:3) Screen

- Format: 4:3• View area: 43"*57"
- Material: Matte White
- Gain: 1.1• Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/
Surface can be cleaned
- Special used for: School /Business/Home
- Package size:11*13*165cm
- G.W: 4.8KG• Housing size: 7*10*160CM



PRJS4384 84" (50"Hx67"W) Manual Projector Standard Format (4:3) Screen

- Format: 4:3
- View area: 50"*67"
- Material: Matte White
- Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/
Surface can be cleaned
- Special used for: School /Business/Home
- Package size:11*13*190CM
- G.W: 5.8KG
- Housing size: 7*10*185CM



PRJES180 180" Hanging Electronic Motorized Projector Screen

- Opposite Angle: 180"
- Production Dimensions: 88" x 157"
- Proportion: 16:9
- Package Dimensions: 17.20" x 0.63" x 0.63'
- Gross/ Net Weight: 66.36/ 56.44 lbs



PRJSER1410 100" (60"Hx80"W) Motorized w/Wireless Remote Projector Standard Format (4:3) Screen

- Format: 4:3• View area: 60" 80"
- Material: Matte White
- Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/
Surface can be cleaned
- Special used for: School /Business/Home
- Package size: 5.12"x 6.3" x 92.52"
- G.W: 10.5KG
- Housing size: 3.15" X 4.72" X 68.11"



PRJSE437 72" (43"Hx57"W) Motorized Projector Standard Format(4:3) Screen

- Format: 4:3
- View area: 43" x 57"
- Material: Matte White
- Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/

- Surface can be cleaned
- Special used for: School/Business/Home
- Package size: 4.33" X 5.12" X 87.8" • G.W: 10KG
- Housing size: 3.15" X 4.72" X 68.11"



PRJS43100 100" (60"Hx80"W) Manual Projector Standard Format (4:3) Screen

- Format: 4:3
- View area: 60" x 80"
- Material: Matte White
- Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/ Surface can be cleaned

- Special used for: School /Business/Home
- Package size: 11x13x223CM
- G.W: 7.5KG
- Housing size: 7x10x218CM



PRJSE168 80" (39"Hx69"W) Motorized Projector Widescreen Format(16:9) Screen

- Format: 16:9
- View area: 39" x 69"
- Material: Matte White
- Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/

- Surface can be cleaned
- Special used for: Business/Home
- Package size: 5.12" X 6.3" X 81.89"
- G.W: 10.5KG • Housing size: 3.15" X 4.72" X 79.92"



PRJSER1696 96" (47"Hx84"W) Manual Projector Widescreen Format (16:9) Screen

- Format: 16:9 • View area: 47" x 84"
- Material: Matte White • Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/ Surface can be cleaned

- Special used for: School /Business/Home
- Package size: 5.12" X 6.3" X 94.49"
- G.W: 11KG
- Housing size: 3.15" X 4.72" X 79.92"



PRJSL72 72" (43"Hx57"W) Manual Self Locking Projector Standard Format (4:3) Screen

- Format: 4:3 • View area: 42" x 57"
- Material: Matte White
- Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/

- Surface can be cleaned
- Special used for: School /Business/Home
- Package size: 5.12" X 6.3" X 64.96"
- G.W: 6.3KG • Housing size: 3.15" X 4.72" X 62.99"



PRJSL84 84" (50"Hx67"W) Manual Self Locking Projector Standard Format (4:3) Screen

- Format: 4:3
- View area: 50" x 67"
- Material: Matte White
- Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/ Sur

- face can be cleaned
- Special used for: School /Business/Home
- Package size: 13*16*190cm
- G.W: 7.5KG
- Housing size: 8*12*185CM



PRJSL100 100" (60"Hx80"W) Manual Self Locking Projector Standard Format (4:3) Screen

- Format: 4:3 • View area: 60" x 80"
- Material: Matte White
- Gain: 1.1
- Best viewing angle: 120°
- Other specialty: Mildew Resistant/Flame Retardant/

- Surface can be cleaned
- Special used for: School /Business/Home
- Package size: 13*16*223cm
- G.W: 9KG
- Housing size: 8*12*185CM

For More Information Visit Us @ pyleaudio.com

Complete Product Catalog

PLEDTKIT1 HDTV Video Kit with LED TV Wall Mount, HDMI Cable, and Screen Cleaner For 26" To 42" Flat Panel TV

- HDMI Cable
- High Definition Screen Cleaner
- Super Slim Flat Panel TV Wall Mount
- Only 12.8mm From The Wall
- Easy Lock and Release System

- Including Integrated Bubble Level
- Fits VESA Size from 100x100mm to 400x400mm
- For 26" - 42" Flat Panel TV
- Supports Up To 80 Lbs.



PLEDTKIT2 HDTV Video Kit With LED TV Wall Mount, HDMI Cable, And Screen Cleaner For 32" To 60" Flat Panel TV

- HDMI Cable
- High Definition Screen Cleaner
- Super Slim Flat Panel TV Wall Mount
- Only 0.5 Inches From The Wall
- Easy Lock and Release System

- Including Integrated Bubble Level
- Fits VESA Size from 100x100mm to 600x400mm
- For 32" - 60" Flat Panel TV
- Supports Up To 125 Lbs.



PLEDTKIT3 Heavy-Duty HDTV Video Kit with LED TV Wall Mount, HDMI Cable, And Screen Cleaner For 32" To 60" Flat Panel TV

- HDMI Cable
- High Definition Screen Cleaner
- Super Slim Flat Panel TV Wall Mount
- Only 0.5 Inches From The Wall
- Easy Lock and Release System

- Including Integrated Bubble Level
- Fits VESA Size from 100x100mm to 800x600mm
- For 32" - 60" Flat Panel TV
- Supports Up To 150 Lbs.



PETW102 17" to 37" Motorized Universal Flat Panel TV Tilt wall mount

- Universal mounts fits virtually any 17" to 37" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Motorized left to right
- Max load: 88lbs
- VESA 15.7" x 11.8"

- Distance to the wall: 10.2"
- Product dimension: 17.3" x 13.2" x 10.2"
- Package dimension: 27.6" x 19" x 6.1"
- Gross/Net weight: 46.3/41 lbs.
- AC/DC Adaptor 110/220V
- Remote control Included



PETW103 26" To 42" Motorized Universal Flat Panel TV Tilt Wall Mount

- Universal Mounts Fits Virtually Any 26" To 42" Plasma
- LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto the Wall Plate
- For Fast Installation
- Motorized Up And Down and Left To Right
- Built In Leveler System Max Load: 88lbs,
- VESA 19.7" x 15.7"

- Distance to the Wall: 10.6"
- Product Dimension: 24.4" x 16.9" x 10.6"
- Package Dimension: 26.6" x 18.9" x 9.4"
- Gross/Net Weight: 35/31lbs
- AC/DC Adaptor 110/220V
- Remote Control Included



PSPSF101B 23"-42" Flat Panel TV Wall Unit with Acrylic & Steel Shelf

- Shelf 23" to 42" Flat Panel TV's
- TV's Monitor Stand w Built-in Cable Routing

- Weight Capacity: 132.28 Pounds
- Dimensions: 46.46" x 37.79" x 19.68"



PSPSF103 36"-42" Flat Panel TV Wall Unit with Acrylic & Steel Shelf


- Shelf 36" to 42" Flat Panel TV's
- TV's Monitor Stand w Built-in Cable Routing

- Weight Capacity: 110.23 Pounds
- Dimensions: 23.6" X 19.7" X 47.2"




PSPSW116L 36"-50" Flat Panel TV Articulating Wall Mount

- Universal Flat Panel Flush Mount For 36" To 55" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 165.35 Pounds
- Interface Size: 27.56" x 19.61"
- Distance to the Wall: 3.74" - 10.43"
- Dimensions: 30.71" X 19.61" X 10.43"

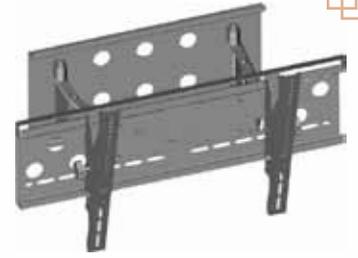

PSPSW116S 23"-37" Flat Panel TV Articulating Wall Mount

- Universal Flat Panel Flush Mount For 23" To 37" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 165.34 Pounds
- Interface Size: 18.90" X 13.70"
- Distance to the Wall: 3.74"-10.43"
- Dimensions: 20.79" X 13.70" X 10.43"




PSW101CM 36" - 65" Flat Panel Tilting TV Wall Mount Bracket

- Universal Mounts fits virtually any 36" to 65" plasma/ LCD flat Panel Screen
- One Touch tilt for effortless positioning and adjustment of the screen
- Up to 12" of horizontal adjustment after screen is mounted
- Mounts to wood/Metal studs, concrete cinder blocks
- (Accessories included)
- Universal brackets easily hook onto wall plate for fast installation
- Weight Capacity: 132.27lbs (60kg)
- Interface size: 31" x 24"
- Distance to the wall 3.2"
- Viewing adjustment: 5°-15°



PSW111 31"-55" Flat Panel Articulating TV Wall Mount

- Universal Design Fits Virtually Any 32"-55" Display
- Universal Brackets Easily Hook onto the wall Plate for Fast Installation
- Built-In Bubble Level in Wall Plate
- Max Load: 150 Lbs
- 0-12° Tilt Adjustment



PSW112 36" - 55" Flat Panel TV Flush Wall Mount Brackets

- Solid heavy gauge steel construction
- Durable powder coated finish (Black or Silver)
- Includes complete hardware kit for easy installation
- Weight Capacity: 165lbs (75kg)
- Interface size: 27.5" x 20"
- Distance to the wall: 2"



PSW113 32"-55" Flat Panel Tilting TV Wall Mount

- Universal Design Fit Virtually Any 32"-55" Display
- Brackets Easily hook onto Wall Plate for Fast Installation
- Built-In Bubble Level in Wall Plate
- MAX Load: 150 Lbs
- 0-12 ° Tilt Adjustment



Complete Product Catalog

PSW117ET1 36" to 65" Flat Panel Tilted TV Wall Mount

- Universal Mounts Fits Virtually Any 36" To 65" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Built In Leveler System
- Max Load 132lbs
- Vesa: 31.5 X 23.6"
- Distance To The Wall: 3.3"
- Product Dimension: 33.3" X 24.8" X 3"
- Package Dimension: 34.8" X 12.6" X 9.1"
- Gross/Net Weight: 39.7/30.9 lbs



PSW128ST 23" To 37" Ultra Thin Flat Panel Flush/Tilt TV Wall Mount

- Universal Mounts Fits Virtually Any 23" To 37" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Max Load 77 Lbs
- Vesa: 400 X 400
- Distance To The Wall: 1.45"
- Product Dimension: 17.87" X 16.93" X 1.3"
- Package Dimension: 19.6" 9.57" X 12.8"
- Gross/ Net Weight: 43.6/ 41.4 Lbs



PSW129MT 32" to 50" Flat Panel TV Flush/Tilt Wall Mount

- Universal mounts fits virtually any 32" To 50" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Built in leveler system
- Max load: 110lbs
- Vesa: 23.62"x15.75"
- Distance to the wall: 1.3"
- Product dimension: 25.74"x16.93"x1.3"
- Package dimension: 28.5"x10.4"x12.8"
- Gross/Net weight: 47.5/36.9 lbs



PSW228 23" TO 36" Flat Panel LCD/LED TV Tilting Wall Mount

- universal Mounts fits Virtually any 23" to 36" Plasma or LCD Flat Panel Screen
- Universal Brackets Easily Hook onto The Wall Plate For Fast Installation
- Tilt and Leveling Adjustments
- Max load: 88Lbs
- Vesa: 19.7" x 15.7"
- Distance to the Wall" 3.3"
- Product dimension: 21.5" x 16.9" x 3.3"
- Package Dimesnion: 23.2" x 16.7" x 9.1"
- Gross/Net Weight: 40.5/32.6lbs



PSW229 36" TO 55" Flat Panel LCD/LED TV Tilting Wall Mount


- universal Mounts fits Virtually any 36" to 55" Plasma or LCD Flat Panel Screen
- Universal Brackets Easily Hook onto The Wall Plate For Fast Installation
- Tilt and Leveling Adjustments
- Max load: 132 Lbs
- Vesa: 31.5" x 23.6"-31.5" x 15.7"
- Distance to the Wall 3.3"
- Product Dimension: 33.3" x 24.8" x 3.3"
- Package Dimesnion: 34.8" x 12.6" x 9.1"
- Gross/Net Weight: 40.5/36.9lbs



PSW320MF Universal Flat Panel LCD/LED Tv Wall Mount Flush for 42" to 65" Screens

- Universal Flat Panel Flush Mount for Screens
- Universal Brackets easily hook onto Installation
- Leveling Adjustments
- Max Load: 132 Lbs
- Vesa: 31.5" x 23.6"

- Distance to the Wall: 1.0
- Product Dimension: 37.6" x 24.8" x 1.0"
- Package Dimension: 38.5" x 8.5" x 6.7"
- Gross/ Net Weight: 28.6/21.6Lbs

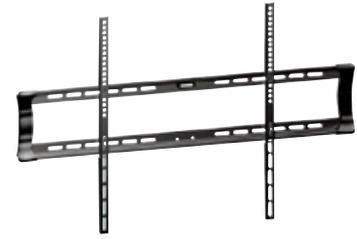

PSW321MT Universal Tilting Flat Panel Tv Wall Mount Flush for 42" to 65" Screens

- Universal Tilting Flat Panel Flush Mount for 42" to 65" Screens
- Universal Brackets easily hook onto the Wall Plate for fast Installation
- Leveling Adjustments
- Max Load: 165 Lbs

- Vesa: 31.5" x 23.6"
- Distance to the Wall: 3.3"
- Product Dimension: 37.6" x 24.8" x 3.3"
- Package Dimension: 38.9" x 11.8" x 9.3"
- Gross/ Net Weight: 33/23.8Lbs



PSW323ST Universal Tilting Flat Tv Panel Flush for Wall Mount 26" to 42" Screens

- Universal Tilting Flat Panel Flush Mount Screens
- Universal Brackets easily hook onto the Installation
- Leveling Adjustments
- Max Load: 132 Lbs
- Vesa: 19.7" x 15.8"

- Distance to the Wall: 3.3"
- Product Dimension: 25.8" x 16.9" x 3.3"
- Package Dimension: 26.8" x 8.5" x 2.0"
- Gross/ Net Weight: 9.9/7.3 Lbs



PSW445T 10" to 32" Flat Panel Tilted TV Wall Mount

- Universal Mounts Fits Virtually Any 10" To 32" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Built In Leveler System

- Max Load: 77.2lbs
- Vesa: 7.87 x 7.87"
- Distance To The Wall: 2.7"
- Product Dimension: 9.4" X 9.1" X 2.7"
- Package Dimension: 18.3" X 10.6" X 9.1"
- Gross/Net Weight: 35.3/26.5 lbs



PSW446F 10" To 32" Flat Panel Tv Wall Mount

- Universal Mounts Fits Virtually Any 10" To 32" Plasma Or LCD Flat Panel Screen
- Universal Wishbone Fixed Mount
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Portrait Or Landscape Viewing
- Built In Leveler System

- Max Load: 77lbs
- Vesa: 7.9 X 7.9"
- Distance To The Wall: 1"
- Product Dimension: 13.6" X 10.7" X 1"
- Package Dimension: 18.1" X 14.8" X 9.3"
- Gross/Net Weight: 25.4/23.1 lbs



PSW448F 23" to 36" Flat Panel TV Wall Mount

- Universal Mounts Fits Virtually Any 23" To 36" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto the Wall Plate For Fast Installation
- Built In Leveler System
- Max Load: 132lbs


- Vesa: 15.7x11.8"
- Distance To The Wall: 1"
- Product Dimension: 17.3" X 13" X 1"
- Package Dimension: 15" X 18.7" X 8.9"
- Gross/Net Weight: 48.5/35 lbs



Complete Product Catalog

PSW449T 23" to 36" Flat Panel Tilted TV Wall Mount

- Universal Mounts Fits Virtually Any 23" To 36" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation Tilt And Leveling Adjustments
- Built In Leveler System
- Max Load: 132lbs
- Vesa: 15.7 X 11.8"
- Distance To The Wall: 2.76"
- Product Dimension: 17.3" X 13" X 2.76"
- Package Dimension: 20.9" X 18.5" X 9.1"
- Gross/Net Weight: 43/33 lbs



PSW503ST 26" To 42" Flat Panel Tilted TV Wall Mount

- Universal Mounts Fits Virtually Any 26" To 42" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Built In Leveler System
- Max Load 110lbs
- Vesa: 19.7 X 15.8"
- Distance To The Wall: 3.1"
- Product Dimension: 24.4" X 16.9" X 3.1"
- Package Dimension: 27.2" X 13.4" X 10"
- Gross/Net Weight: 45.9/38.8 lbs



PSW578UT 23" To 37" Flat Panel Ultra-Thin TV Wall Mount

- Universal Mount Fits Virtually any 23" To 37" Plasma or LCD Flat Panel Screen
- Universal Brackets easily hook's onto the wall plate for fast Installation
- Max Load: 77.21lbs
- Vesa: 15.7" x 11.8"
- Distance to the wall: 0.6"
- Product Dimension: 15.7" x 13.0" x 0.6"
- Package Dimension: 19.2" x 8.2" x 1.8"
- Gross/Net weight: 4.6/ 4.0 lbs




PSW588UT 32" To 50" Flat Panel Ultra-Thin TV Wall Mount

- Universal Mount Fits Virtually any 32" To 50" Plasma or LCD Flat Panel Screen
- Universal Brackets easily hook's onto the wall plate for fast Installation
- Max Load: 99lbs
- Vesa: 23.6" x 15.7"
- Distance to the wall: 0.6"
- Product Dimension: 23.6" x 16.9" x 0.6"
- Package Dimension: 27.3" x 8.2" x 1.8"
- Gross/Net weight: 6.4/ 5.3 lbs



PSW598UT 42" To 65" Flat Panel Ultra-Thin TV Wall Mount

- Universal Mount Fits Virtually any 42" To 65" Plasma or LCD Flat Panel Screen
- Universal Brackets easily hook's onto the wall plate for fast Installation
- Max Load: 132lbs
- Vesa: 31.5" x 23.6"
- Distance to the wall: 0.7"
- Product Dimension: 31.5" x 24.8" x 0.7"
- Package Dimension: 35.2" x 8.2" x 1.8"
- Gross/Net weight: 8.58/ 7.3 lbs



PSW601AT 32" to 50" Flat Panel Articulating TV Wall Mount

- Universal mounts fits virtually any 32" To 50" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system
- Max load: 132lbs
- Vesa: 23.6"x15.7"
- Distance to the wall: 5.8"-20.3"
- Product dimension: 28.3"x16.9"x5.8"
- Package dimension: 30.9"x12.4"x12.6"
- Gross/Net weight: 59.4/55 lbs



PSW602AT 42" to 65" Flat Panel Articulating TV Wall Mount

- Universal mounts fits virtually any 42" To 65" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system

- Max load: 132lbs
- Vesa: 31.50"x19.7"
- Distance to the wall: 5.83"-20.28"
- Product dimension: 36.22 "x20.87"x5.83"
- Package dimension: 39.2"x12.6"x12.6"
- Gross/Net weight:71.1/67.3lbs



PSW701F 23" - 50" Flat Panel Flush Wall Mount With Built In Level

- 23" to 50" Flat Panel Flush Mount
- Adjustable Pivot Points Provide Tension Control
- Pre-Assembled for Quik Intallation
- All Necessary Hardware Included
- Max Load: 165 Pounds

- Vesa: 23.6" x 15.7"
- Distance to the Wall: 1.2"
- Gross/Net Weight: 8.8/5.5 Pounds
- Dimensions: 26.4" x 16.9" x 1.2"



PSW710S 14" to 37" Flat Panel Triple Arm Articulating Tilt & Swivel TV Wall Mount

- Universal mounts fits virtually any 14" to 37" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Max load:55 lbs

- Vesa: 7.8" X 7.8" / 7.8" X 3.9"
- Distance to the wall:2.8"- 15.6"
- Product dimension: 9.8"x 9.8"x 2.8"
- Package dimension: 12" x 10.6"x 3.1"
- Gross/Net weight:7.26/5.94 lbs



PSW771 32" to 50" Flat Panel Steel Solid Articulating TV Wall Mount

- Universal mounts fits virtually any 32" To 50" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Max load: 88lbs

- Vesa: 3.9"x3.9" 23.6"x15.7"
- Distance to the wall: 3.90"-17.91"
- Product dimension: 26.1"x16.9"x3.9"
- Package dimension: 29.1"x10.4"x10.2"
- Gross/Net weight: 37.4/35.2lbs



PSW772 42" to 65" Flat Panel Steel Solid Articulating TV Wall Mount

- Universal mounts fits virtually any 42" To 65" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Max load: 110lbs

- Vesa: 3.9"x3.9" 31.5"x19.7"
- Distance to the wall: 3.90"-17.91"
- Product dimension: 34.0"x20.9"x3.9"
- Package dimension: 36.4"x10.2"x11.6"
- Gross/Net weight: 52.8/50.6lbs



PSW801T 23" - 50" Flat Panel Tilting Wall Mount With Built In Level

- 23" to 50" Flat Panel Tilted Mount
- Universal Brackets Easily hook Onto the Wall Plate for Fast Installation
- Tilt and Leveling Adjustments
- Max Load:165 Pounds

- Vesa: 23.6" x 15.7"
- Distance To The Wall: 2.8"
- Gross/Net Weight: 12.3/9.0 Pounds
- Dimensions: 26.4" x 19.6" x 2.76"



Complete Product Catalog


PSW802T 36"- 70" Flat Panel Tilting Wall Mount With Built In Level

- 36" to 70" Flat Panel Tilted Mount
- Universal Brackets Easily Hook onto the Wall Plate for Fast Installation
- Tilt and Leveling Adjustment
- Max Load: 165 Pounds
- Vesa: 35.4" x 23.6"
- Gross/Net Weight: 79.37/74.96 Pounds
- Dimensions: 38.19" x 25.59" x 2.76"



PSW974S 26" To 42" Flat Panel Articulating TV Wall Mount

- Universal Mounts Fits Virtually Any 26" To 42" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt and Leveling Adjustments
- Built In Leveler System
- Max Load 88lbs Vesa: 15.7 X 11.8"
- Distance To The Wall: 4.9-14.8"
- Product Dimension: 17.3" X 13.2" X 4.9"
- Package Dimension: 20.1" X 19.7" X 8.5"
- Gross/Net Weight:39.7/37.5lbs



PSW976S 32" To 50" Flat Panel Articulating TV Wall Mount

- Universal Mounts Fits Virtually Any 32" To 50" Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto the Wall Plate For Fast Installation
- Tilt and Leveling Adjustments Built In Leveler System
- Max Load 132.2lbs
- Vesa: 23.6 X 15.8"
- Distance To The Wall: 5.7-15.8"
- Product Dimension: 28.3"X 16.9"X1 5.8"
- Package Dimension: 30.3"X 12"X 9.8"
- Gross/Net Weight:48.5/44 lbs



PSWLB273 15- 32" Flat Panel Dual Arm Cantilever TV Wall Mount

- Universal Mounts Fits LCD Display up to 32"
- Built-In Leveler System
- VESA Standard: 50 x 50 mm, 75 x 75mm, 100 x 100mm
- MAX Load: 44 Lbs
- 180 ° Swivel Left and Right
- 20 ° up and down



PSWLB371 10-24" Universal Triple Arm Swivel/Articulating LCD TV Wall Mount

- Universal Flat TV Mount For 10" To 24" Screens
- Universal Brackets Easily Hook Onto Wall Plate
- Adjustable Pivot Points Provides Tension Control
- Pre-assembled For Quick Installation
- Weight Capacity 50Lbs
- Interface Size 4" x 4"
- Distance to the Wall: 3.5" -16"
- Dimensions:4.7" X 4.7" X 3.5"



PSWLB372 10"- 24" Dual Arm Flat Panel TV Adjustable Full Motion Arm Wall Mount

- Universal Flat Panel Flush Mount For 10" To 24" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Distance to the Wall: 3.14" - 9.84"
- Dimensions: 9.8" X 7.09" X 3.94"



PWLB241 10" to 24" Triple Arm Flat Panel LCD/LED TV Adjustable Cantilever Wall Mount

- Universal mounts fits virtually any 10" To 24" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Built in leveler system
- Max load: 33lbs

- Vesa: 3.94"x3.94"
- Distance to the wall: 3.1"-13.0"
- Product dimension: 4.52"x4.92"x13.0"
- Package dimension: 17.7"x13.2"x13.2"
- Gross/Net weight:39.7/32.7 lbs



PWLB242 10" To 24" Single Arm Flat Panel TV Adjustable Full Motion Arm Wall Mount

- Universal mounts fits virtually any 10" To 24" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Built in leveler system
- Max load: 33lbs

- Vesa: 3.94"x3.94"
- Distance to the wall: 3.1"-7.48"
- Product dimension: 17.87"x16.93"x1.3"
- Package dimension: 22.6"x8.9"x10.4"
- Gross/Net weight:39.7/29.5 lbs



PWLB243 10" to 24" Flat Panel Articulating TV Wall Mount

- Universal mounts fits virtually any 10" To 24" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Built in leveler system
- Max load: 33lbs

- Vesa: 3.94"x3.94"
- Distance to the wall: 3.1"
- Product dimension: 4.53"x4.92"x3.07"
- Package dimension: 28.3"x13.3"x10.8"
- Gross/Net weight:48.5/36.6 lbs



PSWLE54 23"-46" Flat Panel LCD TV Wall Mount

- Universal mounts fits virtually any 23" To 46" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Steel construction keeps your television safe And secure
- Built in leveler system

- Max load:66 lbs
- Vesa: 15.75" × 15.75"
- Distance to the wall: 0.98"
- Product dimension: 17.52"×16.93"×0.98"
- Package dimension: 19.09"×5.12"×12.21"
- Gross/Net weight: 36.3 / 34.9lbs



PSWLE55 36"-55" Flat Panel LCD TV Wall Mount

- Universal mounts fits virtually any 36" To 55" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Steel construction keeps your television safe And secure
- Built in leveler system

- Max load:77 lbs
- Vesa: 23.63" × 15.75"
- Distance to the wall: 0.98"
- Product dimension: 26.18"×16.93"×0.98"
- Package dimension: 26.58" × 5.12"×12.21"
- Gross/Net weight: 41.4 / 39.9lbs



PSWLE56 23"-46" Flat Panel LCD Tilt TV Wall Mount

- Universal mounts fits virtually any 23" To 46" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Steel construction keeps your television safe And secure
- Built in leveler system
- Max load:66 lbs

- Vesa: 15.75" × 15.75"
- Distance to the wall: 2.05"
- Product dimension: 17.52"×16.93"×2.05"
- Package dimension: 19.09"×5.71"×19.14"
- Gross/Net weight: 41.5 / 39.78lbs



Complete Product Catalog

PSWLE59 32"-55" Flat Panel Low Profile Tilt LED/LCD TV Wall Mount

- Extremely ultra-thin tilt mounts for LED or LCD TV
- Steel construction keeps your television safe And secure
- Space-saving design keeps your TV close to the Wall
- Max load:66 lbs
- Vesa: 23.63"× 19.69" and 3.94"×3.94"
- Distance to the wall:1.10"
- Product dimension: 29.33"×20.87"×1.10"
- Package dimension: 31.89"×8.27"×10.36"
- Gross/Net weight: 40.4 / 39.1lbs



PSXPT006 14"- 37" Flat Panel TV Tilting Wall Mount

- Universal Flat Panel Flush Mount For 14" To 37" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 77.16 Pounds
- Interface Size: 9.84" x 11.81"
- Dimensions:13.39" X 11.26" X 2.36"



PSW521XLF Temp

- * Universal brackets easily hook onto the wall plate for fast installation
- * Built in leveler system
- * Max load: 176lbs
- * Vesa: 31.5"×23.6"
- * Distance to the wall: 1.9"
- * Product dimension: 40.2"×24.8"×1.9"
- * Package dimension: 41.9"×13.7"×2.6"
- * Gross/Net weight:15.5/13.7 lbs



PSW531XLT Universal mounts fits virtually any 50" To 80" Plasma or LCD flat panel screen

- * Universal brackets easily hook onto the wall plate for fast installation
- * Tilt and leveling adjustments
- * Built in leveler system
- * Max load: 176lbs
- * Vesa: 31.5"×23.6"
- * Distance to the wall: 3.1"
- * Product dimension: 40.2"×24.8"×3.1"
- * Package dimension: 41.9"×13.7"×3.5"
- * Gross/Net weight:17.9/15.8 lbs



PSW611MUT 32"to 47"Smart / 3D / Interactive TV Wall Mount

- * Universal mounts fits virtually any 32" To 47" Smart / 3D / Interactive TV
- * Gas spring inside,providing fluid,light-touch adjustments
- * Built in leveler system
- * Max load: 22-55 lbs
- * Vesa: 15.7"×15.7"
- * Distance to the wall: 2.9-17.6"
- * Product dimension: 17.5"×15.7"×2.9"
- * Package dimension: 19.9"×17.1"×4.3"
- * Gross/Net weight:17.4/15.1 lbs



PSW651LT1 32" to 55" Flat Panel Fixed TV Wall Mount

- * Universal mounts fits virtually any 32" To 55" Plasma or LCD flat panel screen
- * Universal brackets easily hook onto the wall plate fast installation
- * Built in leveler system
- * Max load: 77lbs

- * Vesa: 23.6"x15.7"
- * Distance to the wall: 1"
- * Product dimension: 25.5"x16.5"x1"
- * Package dimension: 26.2"x8.8"x1"
- * Gross/Net weight:3.7/3.3 lbs



PSW658MF 32" to 55" Flat Panel Fixed TV Wall Mount

- * Universal mounts fits virtually any 32" To 55" Plasma or LCD flat panel screen
- * Universal brackets easily hook onto the wall plate fast installation
- * Built in leveler system
- * Max load: 77lbs

- * Vesa: 23.6"x15.7"
- * Distance to the wall: 1"
- * Product dimension: 25.5"x16.5"x1"
- * Package dimension: 26.2"x8.8"x1"
- * Gross/Net weight:3.7/3.3 lbs



PSW661LF1 37" to 55" Smart / 3D / Interactive TV Wall Mount

- * Universal mounts fits virtually any 37" To 55" Smart / 3D / Interactive TV
- * Built in leveler system
- * Max load: 44-77 lbs
- * Vesa: 23.6"x15.7"

- * Distance to the wall: 2.2"
- * Product dimension: 30.8"x17.2"x2.2"
- * Package dimension: 29.5"x12.8"x3.5"
- * Gross/Net weight:14.5/12.1 lbs



PSW678MT 32" to 55" Flat Panel Tilted TV Wall Mount

- * Universal mounts fits virtually any 32" To 55" Plasma or LCD flat panel screen
- * Universal brackets easily hook onto the wall plate for fast installation
- * Tilt and leveling adjustments
- * Built in leveler system
- * Max load: 77lbs

- * Vesa: 23.6"x15.7"
- * Distance to the wall: 1"
- * Product dimension: 25.5"x16.5"x1"
- * Package dimension: 26.2"x8.8"x1"
- * Gross/Net weight:3.4/2.9 lbs



PSW681MF1 32" to 47" Smart / 3D / Interactive TV Wall Mount

- * Universal mounts fits virtually any 32" To 47" Smart / 3D / Interactive TV
- * Built in leveler system
- * Max load: 26.4-55 lbs
- * Vesa: 15.7"x15.7"

- * Distance to the wall: 2.2"
- * Product dimension: 22.9"x17.2"x2.2"
- * Package dimension: 29.5"x12.8"x3.5"
- * Gross/Net weight:12.7/10.3 lbs



PSW691MT1 32" to 47" Smart / 3D / Interactive TV Wall Mount



PSW668ST 26" to 47" Flat Panel Tilted TV Wall Mount



For More Information Visit Us @ pyleaudio.com

Complete Product Catalog

PXPF201C 23" to 46" Ultra Thin Fixed LED/LCD/PDP Mount

- Universal mounts fits virtually any 23" To 46" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Max load: 77lbs
- Vesa: 3.94"x3.94" 15.7"x15.7"
- Distance to the wall: 1.1"
- Product dimension: 18.1"x16.9"x1.1"
- Package dimension: 20.7"x17.1"x9.8"
- Gross/Net weight:38.5/36.3lbs



PXPF202C 26" to 55" Ultra Thin Fixed LED/LCD/PDP Mount

- Universal mounts fits virtually any 26" To 55" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Max load: 99lbs
- Vesa: 3.94"x3.94" 23.6"x15.7"
- Distance to the wall: 1.1"
- Product dimension: 26.0"x16.9"x1.1"
- Package dimension: 28.3"x17.1"x9.8"
- Gross/Net weight:45.3/43.1lbs



PXPT201 23" to 46" Ultra Thin Tilt LED/LCD/PDP Mount

- Universal mounts fits virtually any 23" To 46" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Max load: 77lbs
- Vesa: 3.94"x3.94" 15.7"x15.7"
- Distance to the wall: 1.5"
- Product dimension: 18.1"x16.9"x1.5"
- Package dimension: 19.7"x10.2"x15.0"
- Gross/Net weight:30.1/27.9lbs



PXPT202 26" to 55" Ultra Thin Tilt LED/LCD/PDP Mount

- Universal mounts fits virtually any 26" To 55" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Max load: 99lbs
- Vesa: 3.94"x3.94" 23.6"x15.7"
- Distance to the wall: 1.5"
- Product dimension: 26.0"x16.9"x1.5"
- Package dimension: 27.6"x10.2"x15.0"
- Gross/Net weight:34.1 /31.9lbs



PXPT203 37" to 65" Ultra Thin Tilt LED/LCD/PDP Mount

- Universal mounts fits virtually any 37" To 65" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Max load: 99lbs
- Vesa: 3.94"x3.94" 31.5"x19.7"
- Distance to the wall: 1.5"
- Product dimension: 33.8"x20.9"x1.5"
- Package dimension: 35.4"x10.2"x15.0"
- Gross/Net weight:40.7/38.5lbs



PHDMIKT1 HDTV Audio/Video Cable Connection Kit Compatible w/ Plasma, LCD/LED/DLP/DVD and Audio Players

- 1@6ft AV Cable (3r-3r), Gold Plated
- 1@6ft Component Cable(3r-3r), Gold Plated
- 1@6ft Audio Cable (2r-2r), Gold Plated
- 1@6ft HDMI Cable, Gold Plated
- 1@6ft Toslink Cable

- 1@6ft S-Video Cable, Gold Plated
- 1@6ft HDMI To DVI Male Adaptor, Gold Plated
- PACKED COLOR GIFT BOX



PHDMIKT2 HDTV CLEANING KIT w/ 2 HDMI HIGH DEFINITION CABLES/COMPONENT VIDEO HIGH DEFINITION CABLE/OPTICAL AUDIO HIGH DEFINITION CABLE



PCL101 LCD Screen & Computer Keyboard Cleaning Kit



PCL103 LCD Screen & Cleaning Eraser Cleaning Kit



PCL104 LCD Screen & Computer Keyboard Cleaning Kit



PCL105 LCD Screen & Computer Keyboard 3 pc Cleaning Kit



PCL106 LCD Screen & Computer Keyboard Cleaning Kit



PCL107 LCD Screen & Computer Keyboard Cleaning Kit



PHDMF1 Single HDMI Wall Plate



PHDMF2 Dual HDMI Wall Plate



PHDMIB1 Single HDMI Wall Palte 90 Degree Exit Port



PHDMIW1 Single HDMI Wall Plate 90 Degree Exit Port



Complete Product Catalog

PHDMIW2 Dual HDMI Wall Plate
90 Degree Exit Ports



PHDMRB2 Dual HDMI Wall Plate
90 Degree Exit Ports



PHDMIW6 HDMI + 2 RCA + 3 RCA
Double Wall Plate



PHDBM6 HDMI+2 RCA+3 RCA
Black Wall plate



PHDM2RB2 HDMI/Mono RCA Audio
Coaxial/ Dual Ethernet



PHDM2RJRF1 HDMI /Mono RCA
Audio /Coaxial /Dual
Ethernet Combo Wall Plate



PHDMRCF1 HDMI/Mono RCA
Audio Combo Wall Plate



PHDMRCF2 HDMI/Stereo (Dual)
RCA Audio Combo Wall Plate



PHDMRBC3 HDMI/ 3 (RGB/RCA)
Component Combo
Wall Plate



PHDMRBC2 HDMI/Stereo (Dual)
RCA Audio
Combo Wall Plate



PHDMRCF3 HDMI/ 3 (RGB/RCA)
Component Combo
Wall Plate



PHI71
7.1 Home Theater Fourteen Post Binding
Banana Plug with Dual
Subwoofer Posts Wall Plate
White (14 Posts/Polarity for 7 Speakers)



PHI71B
7.1 Home Theater Fourteen
Post Binding/Banana
Plug with Dual RCA Subwoofer
Posts Wall Plate Black
(14 Posts/Polarity for 7 Speakers)



PHRCA2 Dual Stereo RCA Wall Plate



PHRCOMP3 3 RGB/RCA Component
Wall Plate



PHWP1
Dual Post Binding/Banana
Plug Wall Plate White
(2 Posts/Polarity For 1 Speaker)



PHWP2 Four Post Binding/Banana
Plug Wall Plate White
(4 Posts/Polarity For 2 Speakers)



PHDK1 Dual HDMI + 2 RCA + 3 RCA Wall
plate W/Back Pigtail Plug For
Easy Installation



PHDK6 HDMI + RJ11 + RJ45 + Coaxial + RCA Wall
plate W/Back Built-in Flexible Cable For
Easy Installation



PHDK8
Single Port HDMI White Wall
W/Back Built-in Flexible Cable For
Easy Installation



PHDK9

2 Port HDMI Wallplate W/ Back Built-in Flexible Cable For Easy Installation



PHDMMF3

HDMI Male to 2 Female Video Splitter Adapter Cable



PHDMRT3

3FT Horizontal Swivel High Definition HDMI Cable w/ Heavy-Duty Fiber Shielding



PHDMRT6

6FT Horizontal Swivel High Definition HDMI Cable w/ Heavy-Duty Fiber Shielding



PHDMRT12

12ft Horizontal Swivel High Definition HDMI Cable w/ Heavy-Duty Fiber Shielding



PHDM3

3ft High Definition HDMI Cable



PHDM6

6ft High Definition HDMI Cable



PHDM12

12ft High Definition HDMI Cable



PHAA3

3 Ft. HDMI Cable with 24k Gold-Plated Connectors



PHAA6

6 Ft. HDMI Cable with 24k Gold-Plated Connectors



PHAA12

12 Ft. HDMI Cable with 24k Gold-Plated Connectors



PHDMDVI3

3FT HDMI Male To DVI Male Cable



PHDMDVI6

6FT HDMI Male To DVI Male Cable



PHDMDVI12

12FT HDMI Male To DVI Male Cable



PDOC6

6 FT Mini-Toslink to Toslink Optical Digital Audio Cable



PHFIDM

HDMI Female to DVI Male Adapter



PHMIDM

HDMI Male to DVI Male Adapter



PHDMFCI

HDMI Male to Female Coupler - 90 Degree



PHDMFF1

HDMI Female To Female Adapter



PHDMFF9

HDMI Female to Female Adaptor Right Angle



For More Information Visit Us @ pyleaudio.com

Complete Product Catalog

PSPHD42 PSP To HDMI Converter With Up-Scaling (Full Screen)

- Input: 1 X PSP In (Component Video And Audio From PSP Pass Through A VGA Interface)
- Output: 1 X HDMI, 1 X 3.5mm Audio
- It Achieves Full-Screen Display Of Sony Playstation Portable On HDTV And HD LCD, While Normal Conversion Or Direct Connection Can Not Be Done
- It Is With Up-Scaling Function Up-Scales PSP Output

- Resolution 480P To HDMI 720P, Offering You HD Video Game
- HDMI Output: 720P @ 60Hz
- Compatible With All Kinds Of HDMI Displays
- Product Dimension: 4.3"(L) X 3.3"(W) X 1.1"(H)
- AC Adapter 110/220V Included



PBNC7503 Composite BNC & S-Video To VGA Converter -Wide Screen

- Composite Video Input Interface: BNC (The Model With RCA Interface Is: PBNC7504);
- Inputs: 1 X Composite BNC Video, 1 X S-Video And 1 X VGA;
- Output: 1 X VGA;
- Switch Between The 3 Inputs And Output One Of Them To VGA;
- The VGA Input Is Pass Through To The VGA Output

- Directly Without Any Processing
- Both PAL / NTSC Are Supported When Power Off
- Composite Video And S-Video Are Up-Scaled To 1680 x 1050 And 3D Video-Processing Tech Is Applied To Make Output Picture Rich In Color
- More Vivid And Free From Flicker
- Product Dimension: 3.9"(L) X 2.4(W) X 1"(H)
- AC Adapter 110/220V Included



PYPBHD40 Component Video & Audio/Spdif To HDMI Converter

- Input: 1 X Component Video), 1 X Audio L/R, 1 X SPDIF
- Output: 1 X HDMI
- Output Audio Is Selectable Between Stereo Audio L/R And SPDIF
- 1 X Component Video Input + 1X Stereo Audio = 1 X HDMI Output
- 1 X Component Video + 1 X SPDIF = 1 X HDMI Output - Supports SPDIF Digital 5.1 Audio

- It Supports Full Range Of Component Video Resolutions: 480i, 480p, 576i, 576p, 720p, 1080i And 1080p
- Resolution, Please Choose Another Model PVGCHD72, Which Is With Up-Scaling Function And The Output Resolution Is Fixed At 720p
- Product Dimension: 1.3"(L) X 2.9(W) X 1.1"(H)
- AC Adapter 110/220V Included



PRCA7504 Composite & Converter To VGA-Wide Screen

- Composite Video Input Interface: RCA (The Model With BNC Interface Is: PBNC7503)
- Inputs: 1 X Composite Video, 1 X S-Video And 1 X VGA;
- Output: 1 X VGA;
- Switch Between The 3 Inputs And Output One Of Them To VGA
- The VGA Input Is Pass Through To The VGA Output Directly Without Any Processing, Both PAL/NTSC Are Supported;
- It Supports Wide-Screen 16:9 And 16:10 LCD As Well To Cater For Wider Applications;
- Optional Resolution: 800 X 600/60HZ, 800 X 600/75HZ,

- 1024X768/60HZ, 1280 X 720/60HZ, 1440 X 900/60HZ, 1600 X 900/60HZ, 1680 X 1050/60HZ;
- Lightness, Hue, Contrast, Saturation, Color, Etc. Are Adjustable And Settings Is Auto-Saved When Power Off
- Composite Video And S-Video Are Up-Scaled To 1680 x 1050 And 3D Video-Processing Tech Is Applied To Make Output Picture Rich In Color, More Vivid And Free From Flicker
- Product Dimension: 3.9"(L) X 2.4"(W) X 1"(H)
- AC Adapter 110/220V Included



PT598AS 5.1 Channel 350 Watt Digital Home Theater AM/FM Receiver Surround Sound Package w/ Subwoofer/Center Channel & 4 x Two Way Directional Satellite speakers

- 5.1 Channel Amplifier
- Built-In AM/FM Radio
- 2 MIC Input, Treble & Bass of MIC Adjustable, Independent MIC Volume Control
- Over Current Protection, Short Circuit Protection & Over Voltage Protection
- 12 Preset Radio Station• Full Remote Control
- VFD Display
- Power Input: AC 115V 60Hz/230V 50Hz
- Power Output: 300W L,R Channel (4 Ohm); 50W for

- Center, Surround L & Surround R (4 Ohm)
- In-Out Selector: 3 Stereo RCA Inputs, AM/FM Radio, 1 DVD Input, 2 Microphone Inputs
- Output: 5 Channel Speaker Output Terminal for Left, Right, Center, Front Left, Front Right & Subwoofer
- Net Weight: 40.0 Lbs
- Gross Weight: 46.3 Lbs
- Dimensions: 25.2" x 20.3" x 16.5"



PT628A 400-Watt 5.1 Channel Home Theater System with AM/FM Tuner, CD, DVD & MP3 Player Compatible

- THD: 0.1%
- S/N Ratio: 85dB
- Digital VFD Display
- DVD & CD Compatible
- MP3 & MP4 Compatible
- 400 Watts Total Power
- Gold Capped A/V Cables & Wires
- Subwoofer: 150 Watts, 10" Long Throw Driver
- Control EQ, All Functions From Remote Control
- Receiver Includes Amplifier, Pre-Amp, AM/FM Tuner

- Satellites and Center Speaker: 250 Watts (5x50 W), 3" Drivers
- Frequency Response: Satellite 150Hz-20kHz, Subwoofer 50Hz-330Hz
- Satellite Speaker Dimensions: 5.89" x 2.75" x 8.84"
- Center Channel Dimensions: 5.89" x 2.75" x 14.14"
- Subwoofer Dimensions (DxWxH): 16.50" x 14.54" x 11.00"
- Gross Weight: 36.4 Lbs.



PT678HBA 400 Watts 5.1 Channel HDMI Home Theater System With Bluetooth Audio Playback, AM/FM Tuner

- 2 HDMI Digital Inputs, 1 Digital HDMI Output
- 3D Pass-Thru HDMI Technology
- Bluetooth Audio Playback - Stream From Your iPhone, iPad, iPod, Android
- Receiver Includes Amplifier, Pre-Amp, AM/FM Tuner
- 400 Watts Total Power
- Subwoofer: 150 Watts, 10" Long Throw Driver
- Satellites and Center Speaker: 250 Watts (5x50 W), 3" Drivers
- Control EQ, All Functions From Remote Control
- Digital VFD Display

- Gold Capped A/V Cables & Wires
- MP3 & MP4 Compatible
- DVD & CD Compatible
- Frequency Response: Satellite 150Hz-20kHz, Subwoofer 50Hz-330Hz
- S/N Ratio: 85dB
- THD: 0.1%
- Subwoofer Dimensions: 16.50"D x 14.54"W x 11.00"H
- Satellite Speaker Dimensions: 5.89"D x 2.75"W x 8.84"H
- Center Channel Dimensions: 5.89"D x 2.75"W x 14.14"H



PT798SBA 7.1 Channel Home Theater System with Satellite Speakers, Center Channel, Subwoofer, Bluetooth, FM Tuner

- THD: 0.1%
- S/N Ratio: 85dB
- Digital VFD Display
- DVD & CD Compatible
- MP3 & MP4 Compatible
- 500 Watts Total Power
- Gold Capped A/V Cables & Wires
- Subwoofer: 150 Watts, 10" Long Throw Driver
- Control EQ, All Functions From Remote Control
- Receiver Includes Amplifier, Pre-Amp, FM Tuner
- Bluetooth Audio Playback - Connect to iPhone, iPod,

- Android
- Satellites and Center Speaker: 350 Watts (7x50 W), 3" Drivers
- Frequency Response: Satellite 150Hz-20kHz, Subwoofer 50Hz -330Hz
- Subwoofer Dimensions (DxWxH): 16.50" x 14.93" x 10.22"
- Satellite Speaker Dimensions: 5.50" x 5.50" x 11.39"
- Center Channel Dimensions: 9.23" x 4.71" x 3.06"



PHS51P 5.1 Home Theater Passive Audio System Four Satellite, Center Channel & 10" Subwoofer



PSB6AI 2.1 Multi-media Audio System System Power (MAX):100 Watts



PHSA5 5.1 Home Theater System With Active Subwoofer and Five Satellite Speakers



For More Information Visit Us @ pyleaudio.com

Complete Product Catalog

PSB90I iPhone/iPod 2.1 Soundbar Docking System with Aux-In and Video Output

- Play and Charge Your iPod or iPhone
- RCA L/R Audio-In Jacks for Stereo Connection
- 3.5mm Aux-In Jack for MP3 Player Connection
- Full Function Remote Control
- Composite Video Output For Playing Videos on TV
- 2x10W Output + 30W Subwoofer
- Bass Control
- Unit Dimensions: 4.75" H x 7" D x 40" L



PSBV100 5-Way Soundbar System With FM Radio, SRS 3D Sound, Four Auxillary Inputs (Piano Black)

- Runs On 110 V Power
- S/N (A Weight): ≥ 80 dB
- SRS 3D Sound Technology
- Speaker Impedance: 8 Ohm
- Power Supply: AC~120V, 60Hz
- Fully Functional Remote Control
- Piano Black Wood-Crafted Finish
- THD (1kHz, 1W, 8 Ohm): $\leq 0.5\%$
- FM Radio with 30 Station Presets
- Input Sensitivity: 400mV(\pm) 50mV
- Frequency Response: 20Hz - 20KHz
- Channel Separated Rate(1kHz): ≥ 40 dB
- Max Output Power: 150 Watt (75 W x 2)
- Three Auxillary RCA Inputs, One 3.5mm Auxillary Input
- 5-Way Sound: One 5.25" Woofer, Two 3" Full Range Speakers, Two 1" Tweeters
- Dimensions: 23.6" x 9.8" x 4.7"



PSBV200BT 300 Watt Bluetooth Soundbar w/USB/SD/FM Radio & Wireless Remote

- Piano-Black Finish Wooden Case & Front Panel Blue Backlight LCD Display
- Bluetooth Wireless Audio Steaming capability from Most Bluetooth enabled devices
- USB 2.0 Host & SD/MMC for external moving Harddrive/Flashdrive. Plays MP3, & WMA Music Formats
- Aux1, Aux2, PC/MP3 Audio Inputs
- Source Selection, Play/Pause/ Bluetooth/Standby/ Volume +/- On board Control
- 5 Speaker Total: 1 x 5.25" Mid Woofer, 2 x 3" Full Range Speaker, & 2 x 1" Vocal Tweeter
- Wireless Handheld Remote Control
- Frequency Response: 20Hz-20KHz
- Input Sensitivity: 800mV
- S/N Ratio: > 70 dB
- Channel Separation Rate (1kHz): > 40 dB
- Power Output: 300 Watts Peak / 150 Watts RMS
- Woofer Impedance: 8 Ohm
- Tweeter & Full Range Speakers: 4 Ohm THD (1kHz,1W,8Ohm): $< 0.5\%$
- Power Supply: DC 18V/2.5A
- Unit Dimensions: H: 4.7" x W: 9.8" x L: 23.8"
- Unit Weight: 11.7 LBS



PSBV400 6-Way 300 Watt Multi-Source Wall/Shelf Mount Sound Bar w/USB, SD, MP3, FM Tuner

- Piano black finish painted wooden case, front panel with blue backlight LCD display.
- 300 Watts Peak Output/ 150W RMS Output
- FM stereo radio with auto search and can store 30 Preset stations.
- CD, AUX1, AUX2, PC/MP3 INPUTS.
- RCA video input and video output to transfer your DVD video to TV set.
- 2 x 4" woofer, 4 x 3" full range speaker.
- With wireless remote control.
- With integrated wall mount.
- Unit dimensions: 5.6" H x 5.6" W x 39.4"L
- Unit weight: 22.5 lbs



PSBV800 6-Way 300 Watt Multi-Source Wall Mount/Surface Sound Enhancement Bar w/USB, SD, HD, MP3, HDMI, FM Tuner

- Piano black finish painted wooden case, front panel with blue backlight LCD display.
- 300 Watts Peak Output/150 Watts RMS Output
- FM stereo radio with auto search and can store 30 Preset stations.
- Built-in High Definition media player which can play MPEG1 (dat, mpg), MPEG2 (vob, mpg, ts), MPEG4 (avi, divx, xvid), mkv, iso, ifo movies,
- MP3, WMA, AAC, OGG music and JPG/JPEG/BMP photos.
- Two USB 2.0 host and one SD/MMC connector for connecting external moving HDD, flash drive, SD/MMC card
- HDMI output supports up to 1920*1080i video output and excellent audio output.
- Wired LAN port to connect computer for network playing.
- Component video output and composite video output.
- AV IN and video input for recording/viewing AV signal from DVD etc.
- AUX, PC/MP3 audio inputs.
- INPUT, MUTE, STANDBY, VOL+, VOL- buttons.
- 1 x 5.25" woofer, 5 x 3" full range speaker
- With wireless remote control.
- With stand and integrated wall mount.
- Unit dimensions: 8.3"H x 5.1"W x 44.1"L
- Unit weight: 25 lbs



PHST80IP

2.1 Channel Sound Tower System - Works with All iPods, iPads & iPhones

- THD: 0.1%
- Alarm/Clock Control
- 2.1 Channel Amplifier
- 600 Watts Output Power
- Component Video Output
- 85 dB Signal Ratio Range
- Full Function Remote Control
- Independent Channel Control
- Dimensions (WxDxH): 9.4" x 11.4" x 39.4"
- Output Power: L/R - 12W, Subwoofer - 26W
- Drive Unit: L/R Channel - 2 x 3", Subwoofer - 5"
- Frequency: L/R - 150Hz-20KHz, Subwoofer - 50Hz-280Hz



PHIT84BK

iPod/iPhone 2.1 Tower Docking Speaker System with FM Radio

- Play and Charge Your iPod or iPhone
- RCA L/R Audio-In Jacks for Stereo Connection
- 3.5mm Aux-In Jack for MP3 Player Connection
- Tune FM Radio With 20 Presets
- Full Function Remote Control
- Composite Video Output For Playing Videos on TV
- 2x10W Output + 30W Subwoofer
- Bass Control



PHST90IBGL 600 Watt Digital 2.1 Channel Home Theater Tower w/ iPod/iPhone Docking Station

- iPod/iPhone/MP3/AUX Input
- Built-in FM Radio With Memory
- Alarm Clock Control and Time
- 2.1 Channel amplifier
- Real 2.1 Channel output
- Full Function Remote Control
- Independent Control of Each Channel
- iPod/iPhone Can be Controlled Through Remote
- iPod/iPhone Charged Automatically
- Touch Key Control System
- LCD display
- Output power:600 Watts
- L (150Watts x 1) R (150Watts x 1) Subwoofer (300Watts x 1)
- Frequency: L,R 150Hz-20kHz Subwoofer 50Hz-180Hz
- Mid Range Driver:Dual 3.5 Inch
- Tweeter:Dual 3.5 inch
- Subwoofer: 8 inch
- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior
- Power: DC 21 Volts w/ 110V Adapter
- Dimensions: 5.43"D x 17.3"W x 40.15"H
- iPod not included



PHST90IBGL



PHST92ICW



PHST92IBK

PHST92I 600 Watt Digital 2.1 Channel Home Theater Tower w/ iPod & iPhone Docking Station

- iPod/iPhone/MP3/AUX Input
- Built-in FM Radio With Memory
- Alarm Clock Control and Time
- 2.1 Channel amplifier
- Real 2.1 Channel output
- Full Function Remote Control
- Independent Control of Each Channel
- iPod Can be Controlled Through Remote
- iPod Charged Automatically
- Touch Key Control System
- LCD display
- Output power:600 Watts
- L (150Watts x 1) R (150Watts x 1) Subwoofer (300Watts x 1)
- Frequency: L,R 150Hz-20kHz Subwoofer 50Hz-180Hz
- Mid Range Driver:Dual 3.5 Inch
- Tweeter:Dual 3.5 inch
- Subwoofer: 8 inch
- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior
- Power: DC 21 Volts w/ 110V Adapter
- Dimensions: 11.5"D x 15.2"W x 41.75"H
- iPod not included



PHST92IBK



PHST92ICW

Complete Product Catalog

PHST94IP 600 Watt Digital 2.1 Channel Home Theater Tower w/ Docking Station for iPod/iPhone/iPad

- iPod/iPhone/iPad/MP3/ AUX Input
- S-Video Output
- Built-In FM Radio with Memory
- Alarm Clock Control and Time
- 2.1 Channel Amplifier
- Real 2.1 Channel Output
- Full Function Remote Control
- Independant Control of Each Channel
- iPod/iPhone/iPad can be Controlled Through Remote
- iPod/iPhone/iPad Charged Automatically
- Touch Key Control System
- LCD Display
- Output Power 600 Watts
- L (150W x 1) R (150W x 1) Subwoofer (300Wx 1)
- Frequency: L,R 150Hz-20kHz Subwoofer 50Hz-280Hz
- Mid Range Driver: dual 3.5 Inch
- Tweeter: DUal 1.0 inch
- Subwoofer: 8 inch
- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior
- Dimensions: 43" x 20.3" x 11"



PHST94IPGL



PHST94IPBK



PHST94IPCW

PHST96IP 600 Watt Digital 2.1 Channel Home Theater Tower w/ Docking Station for iPod/iPhone/iPad

- iPod/iPhone/iPad/MP3 AUX Input
- S-Video Output
- Built-In FM Radio with Memory
- Alarm Clock Control & Time
- 2.1 Channel Amplifier
- Real 2.1 Channel Output
- Full Function Remote Control
- Independant Control of Each Channel
- iPod/iPhone/iPad Can Be Controlled Through Remote
- iPod/iPhone/iPad Charged Automatically
- Touch Key Control System
- LCD Display
- Output Power: 600Watts
- L (150W x 1) R (150W x 1) Subwoofer (300w X 1)
- Frequency: L, R 150Hz-20kHz Subwoofer 50Hz-280Hz
- Mid Range Driver: Dual 3.5 Inch
- Tweeter: Dual 1.0 Inch
- Subwoofer: 8 Inch
- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior
- Dimensions: 15.2" x 11.4" x 42.1"
- Weight: 35.8 Lbs



PHST96IPGL



PHST96IPBK



PHST96IPCW

PIPDSP2

iPod/iPhone iPad Touch Screen Dock With Built-In FM Radio/Alarm Clock

- iPod/iPhone/iPad input
- Line in Input
- Built in FM Radio
- Component Video out
- Alarm/Clock Control
- iPod/iPhone/iPad controlled by remote control
- iPod/iPhone/iPad charged automatically
- LCD display
- Synchronize with iTunes on the personal computer when iPhone/iPod/iPad is Connected
- Touch Panel control system
- S/N: 88dB
- THD: 0.1%
- Total Power Output: 150 Watts
- Size: 13.58" x 13.58" x 6.80"



Red

Black

PIWPD3 iPod/iPhone Wireless Speakers Docking Station with Aux Input

- Compatible player and charger for iPod/iPhone
- 2 Wireless Speakers with Built-In Rechargeable Lithium Batteries
- 3 Transmission Channels for Low Interference
- Speaker Power: 2x3 Watts
- 30 Meters (100 Feet) Transmission Range
- Volume Control Button on Each Speaker
- Changable Color Light on Each Speaker
- 3.5mm Aux-In Jack
- Video Out
- Automatic Tuning On Speakers
- Remote Control and 110-240V AC Adaptor Included



PBTSD86 Bluetooth Wireless Audio Streaming Clock Radio w/FM Receiver & Alarm Clock

- Negative LCD Display with Back-light
- Play, Pause, Stop, Forward & Backward skip or search
- FM PLL Stereo Radio
- Bluetooth BT2.0 V2.1 + EDR, A2DP/AVRCP
- PLL Digital Tuning System
- 20 preset stations memory
- Electric Volume +/- Control
- 12/24 hour Clock Display
- Single Alarm Wake To FM/Buzzer
- 3" Full Range Speaker
- Clock Back Up Battery 2 x AAA (Battery Not Included)
- 120 Minute Sleep Mode
- 3.5mm AUX-IN Jack • Wireless Remote Control
- AC/DC Adaptor 100~240V (12V2A)
- Dimensions: 14.36"W x 6.69"H x 2.75"H



PIPK78 FM Receiver Radio W/ iPod/iPad/iPhone Docking Station & Alarm Clock

- Negative LCD Display with Back-light
- Play, Pause, Stop, Forward & Backward skip or search
- Apple 30 Pin Connector(SV2.1A) Compatible Ipad (1Gen/2Gen/3Gen) iPhone(3G/3GS/4G/4GS) iTouch(2Gen/3Gen)
- FM PLL Stereo Radio
- PLL Digital Tuning System
- 20 preset stations memory
- Electric Volume +/- Control
- 12/24 hour Clock Display
- Single Alarm Wake To FM/Buzzer/iPod/iPad/iPhone
- 3" Full Range Speaker
- Clock Back Up Battery 2 x AAA (Battery Not Included)
- 90 Minute Sleep Mode
- 3.5mm AUX-IN Jack
- Composite Video Output
- Wireless Remote Control
- AC/DC Adaptor 100~240V (12V2A)
- Dimensions: 14.44"W x 6.77"H x 5.78"H



PIP711 Digital 2-Way Stereo Speaker System for iPods, iPads & iPhones, 300 Watt Power, Remote Control & Line-In

- Charges Your Apple Device When Docked
- Fully Functional Wireless Remote Control
- Output Power: 300 Watt Max, 150 Watt RMS
- Connect Any Digital Music Player Via 3.5mm Jack
- Compatible with Most iPad, iPod & iPhone Models
- Use Component Video Output to Play Video on Your TV
- Full-Range Sound: Dual 5" Woofers & Dual 3/4" Tweeters
- Frequency Response: 150 Hz - 20 kHz, S/N Ratio: 85 dB
- THD: 0.1%. Weight: 13 Lbs.



Complete Product Catalog

PICL29 iPod & iPhone Docking/Aux input Clock Radio W/ FM Receiver & Dual Alarm Clock

- LCD Display Backlite Display
- 12/24 Hour Clock Display Format Selectable
- Alarm Wake-up to FM / iPod / iPhone / Buzzer
- 4 Step Progressive Light Turn-On(1 minute prior to alarm time)
- Clock back up battery 4 x AA size (Battery Not Included)
- 120/90/60/30/15 Minute Sleep Mode Feature
- Snooze/Dimmer(3 Level)
- FM PLL Radio Tuner with 20 preset memory stations
- 30 Pin iPod/iPhone Docking Interface Port
- Compatible with iPhone 3GS & 4G, iPod Classic, iPod Video, iPod 5G, iPod Mini, iPod Nano, & iTouch (All Generations)
- 3.5mm Aux Audio Line Input
- Power: 1.57"(5W) x 2 Stereo Line Output
- AC/DC adapter: AC 110V-240V DC 5 V 2 Amp
- Dimensions: 7.48"W x 1.81"H x 6.92"D



PICL36B Clock Radio iPod/iPhone Docking Station w/FM Receiver & Dual Alarm Clock

- Black Background with White Digit LCD Display
- Play, Pause, Stop, Forward & Backward skip or search
- Apple 30 Pin Connector(5V1A) Compatible iPhone(3G/3GS/4G/4GS) iTouch(2Gen/3Gen/4Gen) Nano(1Gen/2Gen/3Gen/4Gen/5Gen/6Gen)
- FM PLL Stereo Radio
- PLL Digital Tuning System
- 20 preset stations memory
- Electric Volume +/- Control
- 12/24 hour Clock Display
- Dual Alarm Wake To FM/Buzzer/iPod/iPhone
- 2.25" Full Range Speaker
- Clock Back Up Battery 1 x CR2025 (Battery Included)
- 120 Minute Sleep Mode/ Snooze 9 Minute with level Dimmer
- 3.5mm AUX-IN Jack
- AC/DC Adaptor 100~240V (12V1.5A)
- Dimensions: 5.51"W x 7.40"H x 3.44"H



PICL48B iPhone/iPod FM Radio Receiver with CD Player & Alarm Clock

- Top Loading CD Player
- Compatible with CD/CD-R/CD-RW Discs
- Play, Pause, Stop, Forward & Backward skip or search
- Programmable CD Playback
- Repeat 1/all Tracks
- FM Stereo Radio
- PLL Digital Tuning System
- 20 preset stations memory
- LCD Display with Back-light
- Electric Volume +/- Control
- 30 Pins iPod Docking Connector (Not included)
- Compatible with iPhone 3GS & 4G,iPod 5G,iPod Mini,iPod Nano & iTouch (all Generations)
- iPod Classic & iPod Video
- Battery Charging after iPhone/iPod Unit Docked-in (available for all iPod Models with 30 pin connector port)
- Clock Display
- Dual Alarm Function Wake up by Buzzer
- FM Radio or iPhone/iPod music
- Full Function Remote Control
- 3.5mm AUX-IN Jack
- Total Power Output: 50 Watts
- AC 110 Volts



PHSCI20 200 Watts High-Performance 2.1 Channel AM/FM Clock Radio Speaker With iPod / Iphone Docking Station

- Compatibility: iPod Mini 1G; iPod Nano 1G, 2G, 3G,4G, 5G; iPod 3G, 4G, 5G, 5.5G, 6G; iPod Touch(Generation 1 & Generation 2) ;iPhone
- Aux Input Jack Allows Connection of Other Audio Devices, Such As MP3 and CD Players, Desktop Computers,Satellite Radio and Laptops
- Includes AM/FM Radio, Clock, Alarm, And RF Remote With Full iPod Navigation
- Radio Memory Station: AM 9 Station / FM 9 Stations
- sleep timer 5MIN/15MIN/30MIN
- Alarm Allows One To Wake Up To An iPhone, iPod, AM/ FM Radio, Or Buzzer
- Fully Function Remote Control
- LCD Display
- Equalizer Function Control
- Automatic Gain Control
- SRS-3D Level Control
- Color: White
- Dimensions: 8.16"D 9.45"W 4.88"H
- Weight: 8 LBS;
- Total Power Output: 200 Watts
- Power Source: 18V , 1.6A 110V



White

Black

PIPDSP20 iPod/iTouch/iPhone Audio Docking Portable Speaker System

- High Grade Speaker and Digital Amplifier for Superior Sound Quality
- Side Air Vent for Optimal Bass
- Elegant Cloth with Aluminum Trim Panel Design
- Slide Out Rear Stand for Added Support and Comfortable Use
- Side Up Back Support for Extra Safe Device Docking/ Support
- Plays and Charges most iPods, iPod Touch and iPhone
- Fast 1A Charging for iPhone
- AC Operation using Separate AC-Adaptor (Included)
- Top Panel Electronic Volume Controls
- Low Power Consumption with Smart Auto-Off/On Power
- Total Power Output: 15 Watts



PIWIPDK1 Ipod/iPhone In-Wall Mounted Audio/Video Docking Center w/Wireless Remote

- Remote control system
- The unit has S-Video output For Ipod/iPhone Playback On a Monitor
- Provides a balanced RCA audio output
- Supports IR control
- Built-in IR receiver
- Strong construction and protective cover
- Charges All I pods and iPod/iPhone
- You Can view any iPod/iPhone videos on a TV



iPod Touch 3rd Generation

PIWIPDK2 iPod/iPhone In-Wall Mounted Audio Docking Center W/Wireless Remote Control

- Remote control system
- Provides a balanced RCA audio output
- Supports IR control
- Built-in IR receiver
- Strong construction and protective cover
- Charges All iPods and /iPhones



PIWIPDK2

PIDOCK1 Universal iPod/iPhone Docking Station For Audio Output Charging - Sync W/iTunes And Remote control

- Dock Station With Remote For All iPods
- Listen To Your Music On Your Home Stereo System
- Synchronize With iTunes On Your Personal Computer
- Stereo Audio Out
- Remote Control System
- Includes Audio and Charging Cables



PIWIPDK2

Complete Product Catalog

PIPADK1 Universal iPod/ipad/iPhone Docking Station For Audio Output Charging - Sync W/iTunes And Remote control

- Conveniently dock & charge your iPhone, iPad, or iPod
- Using the USB port, sync with iTunes while your device is connected
- Stereo audio out (3.5mm jack)
- Control the music with the included wireless remote

- control
- Construction material: Plastic
- Dimensions: 3.77" x 2.13" x 0.83"



PIPADK2 Universal iPod/ipad/iPhone Docking Station For Audio & Video Output Charging - Sync W/iTunes And Remote control

- Conveniently dock & charge your iPhone, iPad, or iPod
- Using the USB port, sync with iTunes while your device is connected
- Stereo audio out (3.5mm jack)
- Control the music with the included wireless remote

- control
- Component video output
- Construction material: Plastic
- Dimensions: 3.77" x 2.13" x 0.83"



PIPADK3 Universal iPod,iPhone & iPad Multimedia Entertainment Docking Station with Remote Control (Black)

- Compatible with all iPods, iPhones & iPads
- Stereo Audio Output
- Component Video Output
- USB Host/Device Control
- HDMI Output
- Mini USB Port

- Standard USB Port
- Dock charges your iDevice
- Wireless Remote Control Included
- Connect and stream media directly to your TV
- Size: 5.5" W x 3.9" D x 1.2" H



PBTR70 Bluetooth A2DP Streaming Audio Interface (Music/Audio) Receiver Adapter for 30-Pin Apple iPod/iPhone/iPad Docking Station With LED Status Indicator & 3.5 mm Stereo Aux Input

- Easy to use by connecting directly 30 pin device with the dock to change the common Apple Sound Box to wireless Bluetooth Audio and control from your portable device.
- Extended Distance to play your favorite songs in your device through a Bluetooth Connection.
- Support digital products using Bluetooth, such as iPad, iPod touch, iPhone, Bluetooth Cell Phone, Android, Blackberry, Bluetooth PC, PSP, & many more
- Complies with Bluetooth 2.0, Plug and Play. Support A2DP V1.2, compatible with all devices enabled

- with A2DP stereo Bluetooth.
- 3.5mm/ 1/8" Female Aux line input allows for Direct Audio input into an Apple Only 30 Pin Docking Source.
- 3 Level LED illumination to confirm visual Bluetooth Interface
- (Red/Blue/Flashing Blue)
- Control your music wirelessly throughout your home
- Transmission distance: not less than 10 meters (33 feet)
- Unit Dimensions: 2.15"H x 2.15"W x 0.45"D



PBS2BK Bluetooth Mini Speaker With Handsfree Phone Function, Aux-In, 8 Hours Of Playback

- Bluetooth Wireless Module Compatible With Many Smartphones
- iPhone, iPad, Android, BlackBerry, All Bluetooth-Enabled Music Players
- Supports Bluetooth Stereo For Rich Sound And Superb Bass Response
- Rechargeable Lithium-Ion Battery Lasts Up To 8 Hours, Charges Via USB

- Answer Calls With Bluetooth Hands Free Function
- Play, Pause, Previous, Next Functions Over Bluetooth
- Connect Virtually Any Audio Device Via 3.5mm Aux-In Jack
- Constructed From Durable Aluminum Alloy
- Bluetooth Profiles Supported: A2DP, AVRCP
- Color: Black
- Dimensions: 2.4" H x 2.4" W x 2.3" D



PBS9BK Bluetooth Mini Cube Speaker With Handsfree Phone Function, Aux-In, 8 Hours Of Playback

- Bluetooth Wireless Module Compatible With Many Smartphones
- iPhone, iPad, Android, BlackBerry, All Bluetooth-Enabled Music Players
- Supports Bluetooth Stereo For Rich Sound And Superb Bass Response
- Rechargeable Lithium-Ion Battery Lasts Up To 8 Hours, Charges Via USB

- Answer Calls With Bluetooth Hands Free Function
- Play, Pause, Previous, Next Functions Over Bluetooth
- Connect Virtually Any Audio Device Via 3.5mm Aux-In Jack
- Constructed From Durable Aluminum Alloy
- Bluetooth Profiles Supported: A2DP, AVRCP
- Color: Black
- Dimensions: 2.4" H x 2.4" W x 3.2" D



PMNP2S Mini High Volume Portable Rechargeable Speaker System For iPod, MP3 Players, Computer & Mobile Phones



For More Information Visit Us @ pyleaudio.com

PMSU1 Bass Expanding Mini Speaker With Built-In USB SD Card Reader volume control, Remote Controller For Ipod/Iphone/Laptops/Computers/Mp3 Players

- Plays all iPod/iPhone models and other audio devices with 3.5-mm audio jack
- Custom-tuned vacuum bass design for low frequency response and sound beyond size
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries
- contains built-in amplifier powered by rechargeable battery
- Play Music From USB Drivers Or MINI SD/MMC Cards
- Slim Design for easy Transport
- Volume +/- Button, Easy To Adjust Volume
- Rechargeable battery, which can support MP3 player and charger to other device
- Card Reader: Mini SD/MMC card Support And USB Port
- Full Function Remote Controller
- Dimensions: 2.1" D x 1.6" W x 2.5" H



Black



Red

White

PMS2 Mini Capsule Rechargeable Speaker for iPod/ MP3/MP4/Computer/Laptop/Notebook/Audio/Gaming-Devices/PDA

- Plays all iPod/iPhone models and other audio devices with 3.5-mm audio jack
- Perfect replacement for laptop speakers
- Unique vacuum bass design for surprising volume and bass response
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries
- Frequency response 100HZ-20KHZ
- Battery Charge time: DC 5V 200MAH-300 MAH around 2.5 hours; USB 4 hours
- Plays On Fully Charged 8 hours
- Dimensions: 2" D x 1.4" W x 2.2" H



Red

White

PMS5D Bass Expanding Rechargeable Mini Speakers Pair for iPod/MP3/Computers

- Plays all iPod/iPhone models and other audio devices with 3.5-mm audio jack
- Perfect replacement for laptop speakers
- Unique vacuum bass design for surprising volume and bass response
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries

- Frequency response 100HZ-20KHZ
- Battery Charge time: DC 5V 200MAH-300 MAH around 2.5 hours; USB 4 hours
- Plays On Fully Charged 8 hours
- Dimensions: 2" D x 1.4" W x 2.2" H



PMS8R Bass Expanding Chainable Rechargeable Mini Speakers For IPod/IPhone/MP3/Computer

- Works With All iPod/iPhone Models And Other Audio Devices With 3.5mm Audio Jack
- Daisy-Chain Multiple Speakers Together For A Huge Sound
- Perfect Replacement For Laptop Speakers
- Unique Vacuum Bass Design For Surprising Volume And Bass Response
- Fits In Your Hand Or Pocket For Ultimate Portability

- Built In Li-Ion Rechargeable Batteries - Lasts Up To 4 Hours
- Frequency Response: 280 Hz - 16 kHz
- Battery Charge Time: DC 5V 200MAH-300 MAH Around 2.5 Hours; USB 4 Hours
- Power Output: 10 Watts
- Dimensions: 2.55" X 2.17" X 1.26"



PMS6B Bass Expanding Chainable Rechargeable Mini Speakers For IPod/IPhone/MP3/Computer

- Works With All iPod/iPhone Models And Other Audio Devices With 3.5mm Audio Jack
- Daisy-Chain Multiple Speakers Together For A Huge Sound
- Perfect Replacement For Laptop Speakers
- Built In Li-Ion Rechargeable Batteries - Lasts Up To 4 Hours
- Battery Charge Time: DC 5V 200MAH-300 MAH Around 2.5 Hours; USB 4 Hours
- Dimensions: 2.55" X 2.17" X 1.26"



Black



Red

Complete Product Catalog

PIP10 Portable Speaker System For Ipod & Any Other MP3 Player

- Output Power: 2 x 20W
- 1.5 inches Magnetically Shield Full Range Driver
- 5 Volt Convenient Switching Adapter from 110V to 220V Included, UL/ CU or CE/ GS Listed
- Power Volume Controls
- Convenient 4 AAA Battery Compartment
- Set of Speakers
- User Manual

- 110-220V Switching Adapter
- 3.5mm to 3.5mm Audio Cable Included
- Three Ipod Holders
- Carry Bag
- Folded Dimensions: 9.1" x 1.5" x 2.4"
- Unfolded Dimensions: 9.1" x 3.2" x 4.3"
- Weight: 1.4 LB
- Color: White



iPod Not Included

PIP20 Portable Speaker System For Ipod & Any Other MP3 Player

- Output Power: 2 x 20W
- 1.5 inches Magnetically Shield Full Range Driver
- 5 Volt Convenient Switching Adapter from 110V to 220V Included, UL/ CU or CE/ GS Listed
- Power Volume Controls
- Convenient 4 AAA Battery Compartment
- Set of Speakers
- User Manual

- 110-220V Switching Adapter
- 3.5mm to 3.5mm Audio Cable Included
- Three Ipod Holders
- Carry Bag
- Folded Dimensions: 9.1" x 1.5" x 2.4"
- Unfolded Dimensions: 9.1" x 3.2" x 4.3"
- Weight: 1.4 LB
- Color: White



iPod Not Included

PSBU9 Portable Bookshelf Speaker With Lithium Rechargeable Battery, Stereo, USB/SD Card Playback Aux In For iPod Android iPhone iPad

- USB/SD Card Support To Play Back Your Favorite Music
- 3.5mm Auxiliary Input to Connect iPod, iPhone, iPad, Android, MP3 Players
- Remote Control for Easy Operation
- Built-In Rechargeable Battery

- 5V DC Charger Included
- FM Radio • Dimensions: 5.5" X 4.7" X 11.0"
- Speaker Power: 15 Watts X 2
- Frequency Response: 200 Hz-20 kHz
- Battery Capacity: 800mah



PKRSP5 Portable & Desktop MP3 Speaker with MP3, USB/SD, FM Radio, Aux In for iPod, Android, HTC, iPad, Alarm Clock, Rechargeable Batteries Included

- Supports MP3, WMA Music Formats
- Support USB, SD, MMC Cards to Play Back Your Favorite Music
- Built In FM Radio
- Auxiliary Input Jack -- Play Back Virtually Any Audio Source
- Microphone Input Jack For Karaoke (Only Works With Battery-Powered Mics Like PLMC15 Or PCMLVC33 not included)
- Built In Rechargeable Lithium Battery (Charges through Included Jack)
- Large LCD Displays Track Information And Lyrics
- Clock, Alarm, and Calendar Functions Keep You Organized
- Recording Function by One Key Playing
- Construction Material: Plastic
- Dimensions: 8.7" X 2.4" X 1.4"
- Speaker Power: 15 W x 2 • Frequency Response: 90 Hz-20 kHz



Black



White



PSPFM1 Portable MP3 Speaker Player With Lithium Rechargeable Battery, LED Display, MP3/Micro SD/USB/Laptop, FM Radio, Aux Input

- LED Screen Display Track Information
- Supports Micro SD Cards and USB Sticks (MP3 Format) To Play Back Your Favorite Music
- FM Radio Function with Auto Search
- Line-In for Any Digital Music Player (iPod, iPhone, iPad, Android, MP3 Player)
- Headphone Jack for Private Listening
- Built-In Rechargeable Lithium Battery
- Material: Plastic
- Dimension: 5" X 3.2" X 1.6"
- Speaker Power: 20 Watts
- Frequency Response: 90 Hz-20 KHz
- Battery Capacity: 600mah



Black



Blue



Red



PLBSK30 Portable Bicycle & Sport Speaker With Up To 8gb Storage

- High Quality Stereo Sound
- Supports Micro SD Card (Up To 8 GB) To Play Back Mp3s
- Built-In Rechargeable Lithium Battery
- Headphone Jack for Private Listening
- Charges over USB — Just Connect To Your Computer
- Battery Capacity: 800mah
- Speaker Power: 20 Watts
- Construction Material: Metal
- Dimensions: 3.5" X 3.5" X 3.7"



Black



Silver



PWPBT60 Rugged and Waterproof Wireless Marine Grade Hanging Bluetooth Speaker (Black)

- Universal wireless speaker works with virtually any Stereo Bluetooth Enabled device: Smartphone(iPhone/Android/etc), tablet(ipad/etc), Computer
- MP3 player
- Marine Grade Shock & Water-proof design
- Built-in Rechargeable Battery let you enjoy your music anywhere you go.
- Outstanding Bass Output
- Easy Push Button Contols
- Stream your music around the house, camping, hiking, rafting or backyard poolside fun.



PSR6 Hanging Waterproof AM/FM Shower Clock Radio

- AM/FM Manual Tuner
- Built in Digital Clock with LCD Readout
- Hanging Hook intergrated design
- Marine Grade Water/Steam Proof
- Rotary Volume Control
- Built-in Analog Tuner & Extended Reach Antenna



PSR9 Fog Free Oval Shaving Mirror Water Resistant Shower AM/FM Clock Radio & Alarm

- AM/FM High Sensivity Manual Tuner
- Built in Digital Alarm Clock with LCD Readout
- Ultra Slim Design Shelf and Wall Mountable
- Marine Grade Water/Steam Proof
- Chrome Accent Easy Push Button Contol & Rotary Knobs
- Rotary Volume Control
- Fog Free Oval Shaving Mirror
- Built-in Analog Tuner & Extended Reach Antenna



PLTTB9U USB Turntable with direct-to-digital USB/SD Card Encoder & Built-in AM/FM Radio conversion

- Turn your Records Into MP3s
- 3 speed (33 1/3/45 and 78 RPM) turntables
- Built-in adapter for 45 RPM LP included
- ceramic cartridge with diamond needle
- Two built-in full range speakers 4 OHMS,30 Watts
- USB/SD encoder that can easily record old vinyl or other Aux in audio onto flash drive or SD/MMC card through

- USB/SD sockets in MP3 formats
- play your music (mp3 and wma)pre-stored on SD/MMC card ,USB drive or M3 player through USB/SD host.
- AM/FM stereo radio
- Strong strengthened semi-transparent dust cover
- AC 110V 60HZ
- Dimensions: 15.5" x 11" x 4.7"



PNGTT1R Classic Horn Phonograph/Turntable With USB-To-PC Connection And Aux-In (Mahogany)

- Classic Turntable With PC Recording Function
- USB Connection to Enable Recording to PC or MAC
- Files Can Be Saved In MP3, WAV, OGG, WMA, etc. Formats
- Auto Return
- Auto Stop
- RCA Stereo Audio Out

- RCA Stereo Audio In
- Ceramic Cartridge
- Belt Drive
- AC Power: 120 V 60 Hz
- 2 Mid-range/Bass Speakers, 1 Treble Speaker For Full Sound
- Color: Mahogany



PTCD8U Retro Style Turntable With CD/Radio/USB/SD/MP3/WMA and Vinyl-to-MP3 Encoding

- Two Speed (33/45 RPM) Turntable
- 3" Built-In Speaker
- Plays CDs and MP3s from USB/SD
- AM/FM Radio (FM 88 - 108 Mhz, AM 540 - 1600 kHz)
- USB/SD Card Slots - Play MP3s or Encode Vinyl to MP3
- Converts Vinyl, Cassette Direct to USB/SD Card
- X-Bass Control System
- Radio Dial Scale With Amber Backlight

- Rotary Volume Control
- RCA Line Out
- 3.5mm Headphone Jack
- Wireless Remote Control
- LCD Display With Blue Backlight
- Power Source: AC 110
- Dimensions: 12.24" (W) x 12.36" (D) 6.61" (H)



Black



Silver

Complete Product Catalog

PTR8U Retro Turntable with AUX Input/Radio/USB/SD/MP3 and Vinyl-to-MP3 Encoding

- 3 Speed 33/45/78 RPM Selectable Turntable
- USB/SD For MP3 Playback
- USB/SD Card Slots - Play MP3s or Encode Vinyl to MP3
- 3" Built-In Speaker
- AM/FM Radio (FM 88 - 108 Mhz, AM 540 - 1600 kHz)
- X-Bass Control System
- Radio Dial Scale With Amber Backlight
- Rotary Volume Control
- RCA Line Out
- 3.5mm Headphone Jack
- LCD Display With Blue Backlight • Runs On 110 V AC



Black



Red

PTTCDS7U Vintage Styled Turntable - Plays AM/FM Radio, Cassettes, CDs, and MP3s - USB/SD Direct Record and Aux Input For iPod/MP3 Players (Mahogany)

- AM/FM Radio
- Built-in Speakers
- RCA Line Outputs
- Front-Loading CD Tray
- Read-Out Analog Radio
- 45 RPM Adaptor Included
- Power Source: AC 110/220V

- LCD Display with Blue Backlight
- Direct USB/SD Turntable Encoding
- Cassette Playback with Single Key Slot-in Design
- 3.5mm AUX Input Jack & 3.5mm Headphone Jack
- Three speeds (33-1/3, 45, and 78 RPM) to Ensure You Enjoy All Your Favorite Vinyl Records



PTTCS9U Classic Retro Style Turntable - Plays AM/FM Radio, Cassettes & MP3s - USB/SD Direct Record Function & Aux Input For iPod/MP3 Players

- AM/FM Radio
- RCA Line Outputs
- Built-in Speakers
- 45 RPM Adaptor Included
- Power Source: AC 110/220V
- Digital Read-Out Analog Radio

- LCD Display with Blue Backlight
- Direct USB/SD Turntable Encoding
- Cassette Playback with Single Key Slot-in Design
- 3.5mm AUX Input Jack & 3.5mm Headphone Jack
- Three speeds (33-1/3, 45, and 78 RPM) to Ensure You Enjoy All Your Favorite Vinyl Records



PTCWTRS80

Floor Standing Retro Vintage Turntable Jukebox With CD, AM/FM Radio, iPod Aux Input Double Cassette Deck

- 2 x 75 Watts Output
- full-range stereo speakers
- CD Player
- Aux Input To Play All Mp3 Player And iPods, Phones
- Am Fm PLL Tuning Radio With 10 Station AM And 10 Stations Fm Memory
- 3 Speed 33/45/78 RPM Selectable Turntable
- Double Cassette Deck
- Includes easy-to-read LED display and dynamic
- Beautifully Constructed MDF Wooden Walnut Color Cabinet
- Runs on 110 V AC



PTTC4U

Multifunction Turntable With MP3 Recording, USB-to-PC, Cassette Playback, Rechargeable Battery

- Three Speed Belt-Driven Turntable Fit For 33, 45, and 78 RPM
- Jewel Stylus with Ceramic Stereo Cartridge
- 45 RPM Adapter
- Automatic and Manual Stop Selection
- Power On/Off With Rotary Volume Control
- 3.5mm Aux-In Jack
- Rechargeable Battery
- USB Cable and Free Audacity Software Included For Vinyl-to-MP3
- Dimensions: 12.72" x 11.97" x 6.30"



For More Information Visit Us @ pyleaudio.com

Classical Turntable with AM/FM Radio/ CD/ Cassette/ USB Recording & iPod Player

- Phono/Radio/CD player/USB record/Cassette
- AM/FM Radio
- Front loading, single CD, drawer type
- CD/MP3/CD-R/CD-RW discs compatible
- USB record
- USB encoder that can easily record old vinyl or other Aux in audio onto Flash Drive Through USB Socket in MP3 Formats
- play Your Music (mp3 and wma)Pre-stored on ,USB Drive or MP3 Player Through USB Port
- 3 speed turntable 33-1/3, 45, 78 RPM
- Ceramic stereo cartridge
- Auto return
- Audio output power: 2.5W(max)
- 3.5mm Aux in jack
- Remote control for CD/USB
- 2 speaker
- AC Power
- Dimensions: 20.08"X13.39"X8.86"



PTCDS1U



PTCDS2UI

PTCDGS3UIP Classical Trumpet Horn Turntable/Phonograph with AM/FM Radio CD/Cassette/USB Players & Direct to USB Recording

- Belt Drive
- USB Record
- 110 Volt AC Power
- Acoustic Trumpet Horn
- Ceramic Stereo Cartridge
- AM/FM Radio with Stereo
- 45 RPM Adaptor Included
- Audio Output Power: 2 Speaker

- Front-Loading, Single CD Drawer
- Phono, Radio, CD & Cassette Players
- 3 Speed Turntable 33-1/3, 45, 78 RPM
- CD, MP3, CD-R/CD-RW Disc Compatible
- Wireless Remote control Playback Configuration
- Play Your Favorite MP3 Song from USB Flash Drives
- Dimensions: 15.55" X 11.81" X 31.49"



PVNP4CD Vintage Phonograph Horn Turntable With CD, Cassette, AM/FM, Aux-In, USB-to-PC Recording

- Handmade High Quality Wood Veneer Cabinet
- Speaker: Full Size Brass Horn
- 3 Speed Turntable: 33, 45, 78 RPM
- USB Jack For PC Connection - Record Your Vinyl to MP3
- Drawer CD Player
- Analog AM/FM Tuner
- Slot-in Cassette

- Front Panel 3.5mm Aux-In Jack
- 3.5mm Headphone Jack
- Stereo RCA Output
- USB Cable and Free Audacity Software Included For Vinyl-to-MP3
- Dimensions: 31.49" x 21.65" x 19.69"



PTCDS7UIB Retro Vintage Turntable System with Built-in Speakers - Plays AM/FM Radio, CD, Cassette & MP3s - USB Card & SD Memory Slots, Vinyl-to-MP3 Encoding & Built-in Slide-Out iPod/MP3 Player Compartment (Black)

- AM/FM Radio
- 45 RPM Adaptor Included
- Power Source: AC 110/220V
- Illuminated Front Dial Display
- LCD Display with Blue Backlight
- Front-Loading Single CD Drawer
- Compatible with CD-R/CD-RW Discs



- Wireless Remote Control Playback Configuration
- 3.5mm AUX Input Jack & 3.5mm Headphone Jack
- Cassette Playback with Single Key Slot-in Design
- Three speeds (33-1/3, 45, and 78 RPM) to Ensure You Enjoy All Your Favorite Vinyl Records
- Dimensions: 15.98" (W) x 13.62" (D) x 8.66" (H)



PTTCSM60 Turntable Boombox Multimedia System - Plays AM/FM Radio, CDs, Cassettes, MP3s, - USB/SD Memory Ports & Vinyl-to-MP3 Encoding

- 150 Watt Output
- RCA Line Outputs
- 3.5mm AUX Input Jack
- 45 RPM Adaptor Included
- Analogue Tuning Radio (FM)
- Bookshelf Speakers Included
- Direct USB/SD Turntable Encoding
- Compatible with CD-R/CD-RW Discs
- Wireless Remote Control Playback Configuration
- 3.5mm AUX Input Jack & 3.5mm Headphone Jack
- Front-Loading, Single CD Drawer and Dual Cassette Decks
- Three Speeds (33-1/3, 45, and 78 RPM) Record Playing Speeds
- Dimensions (Main Unit): 12.49" x 11.39" x 10.53"
- Dimensions (Speaker): 5.73" x 6.28" x 8.84"



Complete Product Catalog

PTCDS7UIW

Retro Vintage Turntable System with Built-in Speakers - Plays AM/FM Radio, CD, Cassette & MP3s - USB Card & SD Memory Slots, Vinyl-to-MP3 Encoding & Built-in Slide-Out iPod/MP3 Player Compartment (Wood Finish)

- AM/FM Radio
- 45 RPM Adaptor Included
- Power Source: AC 110/220V
- Front-Loading Single CD Drawer
- Illuminated Front Dial Display
- LCD Display with Blue Backlight
- Compatible with CD-R/CD-RW Discs

- Wireless Remote Control Playback Configuration
- 3.5mm AUX Input Jack & 3.5mm Headphone Jack
- Cassette Playback with Single Key Slot-in Design
- Three speeds (33-1/3, 45, and 78 RPM) to Ensure You Enjoy All Your Favorite Vinyl Records
- Dimensions: 15.98" (W) x 13.62" (D) x 8.66" (H)



PTCDS5U

Vintage Turntable With CD/Cassette/Radio/Aux-In/USB/SD/MP3 and Vinyl-to-MP3 Encoding

- Two Speed (33/45 RPM) Turntable
- Plays CDs and MP3s from USB/SD
- AM/FM Radio (FM 88 - 108 Mhz, AM 540 - 1600 kHz)
- Cassette Playback With Single Key Design
- USB/SD Card Slots - Play MP3s or Encode Vinyl to MP3
- Converts Vinyl, Cassette Direct to USB/SD Card
- 3.5mm Auxillary Input Jack
- Extra Bass Control System

- Dial Scale With Illumination
- Rotary Volume Control
- Remote Control for CD with 12 Buttons
- 3.5mm Headphone Jack
- LCD Display With Blue Backlight
- Power Source: AC 110 / 220 V
- Dimensions: 15.98" (W) x 13.62" (D) x 8.66" (H)



PVNTT6UMB

Vintage Style Phonograph/Turntable With USB-To-PC Connection (Black)

- 3 Speeds (33, 45, 72 RPM)
- Music Can Be Transferred to PC or Mac via USB Connection
- Files Can Be Saved In MP3, WAV, OGG, WMA, etc. Formats
- Handcrafted Wooden Cabinet
- High Quality Sounds

- Auto Stop Phonograph
- Ceramic Cartridge
- Belt Drive
- AC Power: 120 V 60 Hz
- RCA Line-Out for Audio Amplifier
- RCA Line-In for Auxillary Input
- Color: Black



PVNTT6UMR

Vintage Style Phonograph/Turntable With USB-To-PC Connection (Mahogany)

- 3 Speeds (33, 45, 72 RPM)
- Music Can Be Transferred to PC or Mac via USB Connection
- Files Can Be Saved In MP3, WAV, OGG, WMA, etc. Formats
- Handcrafted Wooden Cabinet
- High Quality Sounds

- Auto Stop Phonograph
- Ceramic Cartridge • Belt Drive
- AC Power: 120 V 60 Hz
- RCA Line-Out for Audio Amplifier
- RCA Line-In for Auxillary Input
- Color: Mahogany



PVNTT6UMT

Vintage Style Phonograph/Turntable With USB-To-PC Connection (Dark Maple)

- 3 Speeds (33, 45, 72 RPM)
- Music Can Be Transferred to PC or Mac via USB Connection
- Files Can Be Saved In MP3, WAV, OGG, WMA, etc. Formats
- Handcrafted Wooden Cabinet
- High Quality Sounds

- Auto Stop Phonograph
- Ceramic Cartridge
- Belt Drive
- AC Power: 120 V 60 Hz
- RCA Line-Out for Audio Amplifier
- RCA Line-In for Auxillary Input
- Color: Dark Maple



PVNTTR22

Retro Belt-Drive Turntable With Three Speeds and AM/FM Radio

- 3 Speed Turntable: 33, 45, 78 RPM
- Ceramic Stereo Cartridge
- 45 RPM Adapter
- Two Built-in Stereo Speakers
- AM/FM Radio
- 3.5mm Aux-In Jack
- Stereo RCA Output
- AC Power Supply
- Dimensions: 12.60" x 10.63" x 4.72"



PVTT2U Retro Belt-Drive Turntable With USB-to-PC Connection, Rechargeable Battery

- 3 Speed Turntable: 33, 45, 78 RPM
- Ceramic Stereo Cartridge
- 45 RPM Adapter
- Two Built-in Stereo Anti-Magnetic Speakers
- USB Port For Connection to PC - Convert Vinyl to MP3

- Stereo RCA Output
- Rechargeable Battery
- Free Audacity Software Included For Vinyl-to-MP3 Conversion
- Dimensions: 10.63" x 13.78" x 4.33"



PVNT7U Retro Style Turntable With USB-to-PC

- Wooden Cabinet with Plastic Dust Cover
- Three Speeds: 33, 45, 78 RPM
- 45 RPM Adapter
- Automatic and Manual Stop
- Two Built-in Full Range Speakers

- Ceramic Stereo Cartridge
- Stereo RCA Output
- Free Audacity and USB Cable Included For Vinyl-to-MP3 Conversion
- Dimensions: 12.60" x 11.02" x 3.54"



PMKSPAD2 Universal Tablet PC/Android/Kindle/iPad Floor Stand For Music, Reading, Bedside Use, Fitness Use

- Fits Any Tablet From 8.0 To 10.1 Inches In Size
- Use With Reading Apps, Music Apps, Internet Browsing, Watching Video
- Height Adjustability: 3.6 - 4.9 Feet
- 360° Rotatable Flexible Metal Hose

- 300° Rotatable Tablet Gripper
- High Brightness LED Lamp With Dimmer
- Also Holds Your iPhone/Android Phone
- USB Port To Charge Your Phone with Your USB Charger
- DC 5 Volt



PADRI3 Phono Pre-Amp with USB/RCA PC/MAC Audio Converter

- Easily convert your vinyl records and audio to your computer via a simple USB connection.
- Stereo Headphone output with dedicated level control
- Works with your PC or Mac computer

- Compatible with Windows XP, Vista and Windows 7
- Inbuilt pre-amplifier - No amplifier necessary
- Powered by USB, no additional power required
- Dimensions: 3.14" x 2.16" x 0.98"



PJOB15 Retro Tabletop Radio Jukebox with USB MP3 Playback

- FM Radio Auto-Scan
- Stereo Speaker Playback
- USB Skip/Pause Functions
- Multi-color LED Lighting
- MP3 and WMA File Compatible
- Decorative Center Mold with Chrome-Like Accents
- USB Port for Playback Of MP3 and WMA Musi Files

PJCDUB25 Tabletop Retro Jukebox With CD, FM Radio, USB/SD/MP3, Aux-In For iPod, iPhone, Android

- Fully Functional Slot-Loading CD Player
- FM PLL Radio With Auto-Scan
- Seven Color LED Lighting For A Rich Retro Experience
- USB Jack and SD Card Slot For Playback Of Your MP3/WMA Music
- 3.5mm Aux-In Jack To Connect Virtually Any Audio Source (iPod, iPhone, Android)
- Stereo Speaker Playback
- External Power Adapter

Complete Product Catalog

PRT151 Authentic Classical Themed Home Telephone System w/ Integrated Speaker & 3.5mm Audio Input Jack for Use with iPhone, Android, Blackberry and Any Audio Device

- Tone/Pulse Switch
- Last Number Redial & Flash Function
- Classic Design with Modern Technology
- Ringer High/Low Ringer Volume Selection
- Transfer Between Landline And Mobile Phones
- Eliminate up to 99% of Wireless Device Radiation
- Compatible with Mobile/Smartphones with 3.5mm Jacks
- Handcrafted Real Wood Base With Brushed Copper Accents
- One Button Pick-Up/Hang-Up Landline And Mobile Phone, Directly From Dial Pad



PRT45 Retro Themed Country-Styled American Heritage Wall-Mount Telephone

- Tone/Pulse Switch
- Touch-Tone Buttons
- Last Number Redial Function
- Classic Design with Modern Technology
- Ringer High/Low Ringer Volume Selection
- Functional Crank Handle And Box, As Introduced In The 1920s
- Handcrafted Wood and Veneer Construction With Brushed Bronze-Plated Hardware
- Country Wall Phone with Classic Design: Authentic Reproduction of Early American Heritage Telephones



PRT251 Authentic Classical Themed Home Telephone System w/ Integrated Speaker & 3.5mm Audio Input Jack for Use with iPhone, Android, Blackberry and Any Audio Device

- Tone/Pulse Switch
- Last Number Redial & Flash Function
- Classic Design with Modern Technology
- Ringer High/Low Ringer Volume Selection
- Transfer Between Landline And Mobile Phones
- Eliminate up to 99% of Wireless Device Radiation
- Compatible with Mobile/Smartphones with 3.5mm Jacks
- Handcrafted Real Wood Base With Brushed Copper Accents
- One Button Pick-Up/Hang-Up Landline And Mobile Phone, Directly From Dial Pad



PRT351 Authentic Classical Themed Home Telephone System w/ Integrated Apple Docking Station & 3.5mm Audio Input Jack for Use with iPhone, Android, Blackberry and Any Audio Device

- Tone/Pulse Switch
- Built-in iPhone Dock
- Last Number Redial & Flash Function
- Classic Design with Modern Technology
- Ringer High/Low Ringer Volume Selection
- Transfer Between Landline And Mobile Phones
- Eliminate up to 99% of Wireless Device Radiation
- Compatible with Mobile/Smartphones with 3.5mm Jacks
- Handcrafted Real Wood Base With Brushed Copper Accents
- One Button Pick-Up/Hang-Up Landline And Mobile Phone, Directly From Dial Pad



PRT551 Authentic Classical Themed Home Telephone System w/ Integrated Speaker & 3.5mm Audio Input Jack for Use with iPhone, Android, Blackberry and Any Audio Device

- Tone/Pulse Switch
- Last Number Redial & Flash Function
- Classic Design with Modern Technology
- Ringer High/Low Ringer Volume Selection
- Transfer Between Landline And Mobile Phones
- Eliminate up to 99% of Wireless Device Radiation
- Compatible with Mobile/Smartphones with 3.5mm Jacks
- Handcrafted Real Wood Base With Brushed Copper Accents
- One Button Pick-Up/Hang-Up Landline And Mobile Phone, Directly From Dial Pad



PITLBT20

Bluetooth Wireless Charging Retro Handset Phone For iPhone iPad Android Blackberry

- Standby Time: 10 Days
- Blue/Red LED Function Indicators
- Handset Charging Time: 4 Hours Max
- Continuous Operation Time: 10 Hours
- Automatic Power Off When Fully Charged
- Retro Handset Charges Via Wireless - Just Dock It
- Make And Receive Calls Approximately 30 Ft. From Your Phone
- Use For iPhone, iPod, iPad, Android, Blackberry and Most Cell Phones
- Cradle Charges Via Original iPhone Adapter, Mini USB, or Micro USB



PITLBT30

Bluetooth Wireless Charging Retro Phone Handset with iPod Docking Station and iTunes Sync For iPhone iPad Android and Blackberry

- Standby Time: 10 Days
- iPod stand for easy viewing
- Blue/Red LED Function Indicators
- Handset Charging Time: 4 Hours Max
- Continuous Operation Time: 10 Hours
- Automatic Power Off When Fully Charged
- iPod Charging Dock and Sync with iTunes
- Retro Handset Charges Via Wireless - Just Dock It
- Make And Receive Calls Approximately 30 Ft. From Your Phone
- Use For iPhone, iPod, iPad, Android, Blackberry and Most Cell Phones



PIRTR60 Handheld Phone and Desktop Dock for iPhone



- Eliminates 99% of the radiation emitted by your cell phone
- Allows you to use and interact with your phone while talking
- Noise reduction system ensures voice clarity
- Convenient dock connector slot - charge/sync your phone with cable (not included)

- Double angle supporting frame keeps the dock secure on your desk
- Luxurious, soft-touch frame for comfort and style
- High quality speaker and microphone

The PIRTR60 is a series of multicolor desktop docks for your cell phone or smartphone. Smartphones may be fun to touch, but they're not always great for talking on. The PIRTR60 solves that problem by providing you with a handset that you can hold up to your head like a traditional phone, plus a convenient desktop docking station to rest your phone. Easily view texts and emails as they come in, and answer the phone with a single button touch. The high quality speaker and microphone paired with the built-in noise reduction system ensures voice clarity. Plus, using this device reduces the amount of radiation emitted by your cell phone to your body by 99%. It's all in a luxurious, soft-touch frame, and comes in eight different colors

Complete Product Catalog


PDMIK5 Dynamic Cardioid Microphone

- Cardioid Pickup Pattern Rejects Off-Axis Sound
- Durable Metal Construction
- Steel Mesh Ball Grill w/ Integral Pop Filter
- Clear, Transparent Sound
- Frequency response: 100 Hz - 20 KHz
- Microphone sensitivity: - 56 dB
- On/Off Switch for Onstage Control
- 15 Foot XLR (F) - 1/4" (M) Microphone cable



PDWM8300 Professional conference Desktop VHF Wireless Microphone System

- Professional VHF 8 Channel Wireless System
- Eight Table Top Microphones Included
- Dual Telescoping Receiver Antennas
- Eight Volume Controls
- On/Off Broadcasting Switch
- One mixed microphone output 1/4" and XLR jacks
- Dynamic Range: 92dB
- Total Harmonic Distortion: 0.5%
- Frequency Response: 50Hz~16KHz
- Operation Range: 50-180 Meters
- Signal to Noise Ratio: 90dB
- Receiver Power Supply: AC 110/240V
- Microphone Power Source: 9 Volt
- Microphone Dimensions Without Rack Mount: 1.8" x 16.5" x 8.7"
- Receiver Dimensions With Rack Mount 1.8"x 18.9" x 8.7"
- Microphone Dimensions: 12.7" X 4.9" X 5.9"

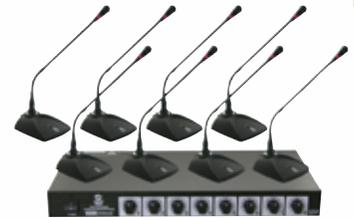

PHA15 3.5mm / 1/8" 150 Watt Mono Audio Amplifier

- 3.5mm / 1/8" Male Audio Input
- 1 Channel Speaker Audio Output
- 15W x 1 RMS Audio Output 150W x 1 Peak Audio Output
- 4 Ohm Stable
- Designed for use with all audio players with 3.5mm /1/8" audio outputs mp3, Ipod, etc.



PHA25 3.5mm / 1/8" 2 Channel 300 Watt Stereo Audio Amplifier

- 3.5mm / 1/8" Male Audio Input
- 2 Channel Speaker Audio Output
- 15w x 2 RMS Audio Output /150w x 2 Peak Audio Output
- 4 Ohm Stable
- Designed for use with all audio players with 3.5mm /1/8" audio outputs mp3, Ipod, etc.



PHE1AB iPod/iPhone Headphone Amplifier

- Designed for iPod/iPhone,
- Improves the sound quality with the line out from the dock
- Build in high quality Texas Instruments's headphone amplifier Intergrated Circuit
- High power output to drive high impedance or low sensitivity headphones or earphones
- Easy control of the playback of the iPod/iPhone while the player stays securely in your pocket
- Compatible with iPod Nano, iPod Video, iPod Touch, iPhone, all generations & all versions
- Easy & simple to use, plug and play
- Powered by the iPod/iPhone (no charging or battery needed)
- With a built-in clip, you can clip it onto anything
- Output Power: 100mW (16 ohms Loaded), 12mW (300 ohms Loaded)
- Signal to Noise Ratio: =98dB (A weight)
- Distortion: <0.009% (10mW)
- Frequency Response: 10Hz ~ 80KHz
- Suitable Headphone Impedance: 16 ohms ~ 300 ohms
- Power Supply: Use iPod/iPhone power 3.3V
- Line control dimesions: 48mmx14mmx10.7mm
- AMP dock: 33.8mmx30.8mmx7.8mm
- Length: 800mm(Line Exposed)
- Weight: 20g



PHE1AW iPod/iPhone Headphone Amplifier (White Color)

- Designed for iPod/iPhone,
- Improves the sound quality with the line out from the dock
- Build in high quality Texas Instruments's headphone amplifier Intergrated Circuit
- High power output to drive high impedance or low sensitivity headphones or earphones
- Easy control of the playback of the iPod/iPhone while the player stays securely in your pocket
- Compatible with iPod Nano, iPod Video, iPod Touch, iPhone, all generations & all versions
- Easy & simple to use, plug and play
- Powered by the iPod/iPhone (no charging or battery needed)
- With a built-in clip, you can clip it onto anything
- Output Power: 100mW (16 ohms Loaded), 12mW (300 ohms Loaded)
- Signal to Noise Ratio: =98dB (A weight)
- Distortion: <0.009% (10mW)
- Frequency Response: 10Hz ~ 80KHz
- Suitable Headphone Impedance: 16 ohms ~ 300 ohms
- Power Supply: Use iPod/iPhone power 3.3V
- Line control dimesions: 48mmx14mmx10.7mm
- AMP dock: 33.8mmx30.8mmx7.8mm
- Length: 800mm(Line Exposed)
- Weight: 20g



PHE3AW Headphone Amplifier With Bass Boost (White Color)

- Designed for high impedance and low sensitivity headphones, with bass boost function
- Small and easy to carry and use in the outdoors
- Increase your music player's play time
- Uses only one AAA battery, for 20 hours playtime
- Output Power: 70 mW (32 ohms Loaded), 12 mW (300 ohms Loaded)
- Signal to Noise Ratio: =90 dB (A Weight)
- Distortion: 0.05% (10 mW)
- Frequency Response: 10 Hz - 40 kHz
- Suitable Headphone Impedance: 16 ohms - 300 ohms
- Power Supply: 1pcs AAA size battery
- Dimensions: 55x23x14.5(mm)
- Weight: 11g



PHE7AB USB DAC Headphone Amplifier

- USB audio decoding and output for PC, functioning as a high quality external USB soundcard
- Texas Instruments' PCM2706 serves as USB receiver. For better sound quality, a Wolfson WM8740 serves as digital-to-analog convertor (DAC), pairing with a high performance operational amplifier from ADI for the DAC circuit
- Built-in headphone amplifier utilizing AD8692 and Texas Instruments' TPA6130A as pre- and power-amp for high performance, good resolution, low distortion, and powerful output
- Standard 3.5mm stereo line-in jack for portable amplification with conventional audio source
- Dual 3.5mm headphone output jack. Convenient design makes it easy to share music between two listeners
- Easy to use digital volume control function with great precision and channel balance
- Built-in EQ for 3 levels of Bass Boost
- Built-in rechargeable 1050 mA H Li-ion battery for 80 hours of continuous operation
- Quality anodized aluminum satin finish case design, small and compact, ideal to be wrapped together with digital audio player
- User selectable USB charging function to help prolong battery lifespan and lower distortion from power supply circuit
- User definable startup volume memory and maximum volume limiter to protect user from hearing damage due to loud volume
- Automatic keylock feature
- User definable sleep timer function and total runtime display
- Output Power: 150mW (16O)16mW (300O)
- Headphone Impedance Range:16 O ~ 300 O
- SNR: =95dB (A weight)on line-in, =100dB (A weight)on USB-in
- Distortion: <0.009% (10mW)on line-in, <0.008% (10mW) on USB-in
- Frequency Range: 10Hz ~ 1000KHz
- Power Supply: Rechargeable Li-ion battery
- Recharging: USB 5V DC 400mA
- Size: 96mmx55mmx15.5mm
- Weight: 100g




PWPE10 Waterproof Marine Headphones Earbuds compatible w/ MP3 players & iPods

- Waterproof Marine Earbuds for a Custom Fit
- Includes 3 Pairs of Different sized
- Frequency Response: 20-20,000Hz
- Impedance: 32 Ohms ± 15%
- Sensitivity (S.P.L): 110dB ± 4dB/mW (at KHZ)
- Maximum Input Power: 20mW
- Speaker Driver Diameter: Ø10mm
- Plug Diameter: Ø3.5mm golden-plated Stereo Plug
- Cable Length: 4 ft.
- Compliant w/ IP7 Waterproof Standard



Black



White

PHPMC2 Stereo PC Multimedia Headset/Microphone

- Speech Recognition Headset And Boom Microphone
- Direct Noise Canceling Microphone Technology
- Adjustable Headband; Adjustable Boom Arm
- Full-Range Stereo Sound
- Convenient In-Line Volume Control
- Frequency Response: 20-22,000Hz / Impedance Headset: 32ohms
- Impedance Microphone: 1.5k Ohms, Sensitivity Micro phone: -58db±2db
- 3.5mm Plug
- Cable Length: 6ft



PHPMC7 Extreme Bass Stereo PC Multimedia Headset/Microphone With Volume Control

- Speech Recognition Headset And Boom Microphone
- Direct Noise Canceling Microphone Technology
- Adjustable Headband; Adjustable Boom Arm
- Full-Range Stereo Sound
- Convenient In-Line Controls For Music And Microphone Volume Or Mute
- Frequency Response: 20-22,000Hz
- Impedance Headset: 32Ohms /Impedance Microphone: 1.5K Ohms
- Sensitivity Headset: 105dB±2dB/mW / Sensitivity Microphone: -58dB±2dB
- Plug: 3.5mm
- Cable Length:6Ft



Complete Product Catalog

PHPMCU10 Multimedia/Gaming USB Headset With Noise-Canceling Microphone

- Gives Unique 3-D,360 Sound Experience
- Eliminates the Need for A Sound Card
- Windows/Mac Compatible
- With In-Line Mute/Volume Control
- Adjustable Headband for Perfect Fit
- Adjustable, Bendable and Pivotal Microphone
- In-Line Volume Control
- Plug Type: USB 2.0
- Cable Length: 6Ft
- Speaker Driver Diameter: Ø40mm
- Sensitivity (S.P.L): 105db±3db/Mw / Impedance: 32 Ohms ± 15%/
- Frequency Response: 20Hz~20,000Hz



High-Fidelity Noise-Canceling Headphones With Carrying Case

- Reduces Ambient Noise By 97%
- Ergonomically Designed For Maximum Comfortable Listening Experience
- Up To 20dB Of Noise Cancellation; Effectively Reduces Aircraft Or Subway Engine Noise
- Convenient Foldable Swivel Design
- Larger 40mm Driver With Clear Sound And Well Defined Bass
- Headphone Driver Unit: Open Air
- Frequency Response: 30 - 20000 Hz
- Speaker Type: 40mm Mylar
- Cone Impedance: 32ohm
- Noise Reduced Over Frequencies 70 - 1200 Hz
- 2 X AAA Batteries Required
- Cable Length: Detachable 1.0m
- 1/8" Stereo Mini Plug Compatibility
- Connects With 3.5mm Stereo Jack
- Included Accessories: Detachable Audio Cable, 1/4 Inch Stereo-Plug Adapter, Dual-Plug Adapter (For Airplane), Hard Carry Case
- Sensitivity: (db): 102/mw
- 30mm Dynamic Closed Type
- 30HZ-20,000HZ
- 33 Ohms@1K



PHPNC65



PHPNC85

PHPNC15 Folding Noise-Canceling Headphones

- Noise Canceling Feature Reduces Background Noise In Any Environment
- Ideal for Airplane, Train And Bus Use
- Closed-Style, Dynamic Headphone with 40mm Driver
- Foldable Headband Allows Phones to Fold Down To A Small Size For Convenient Storage
- Active Noise Canceling Headphones Reduce Outside Ambient Noise By 83.4%
- Noise Cancellation Can Be Switched On/Of
- Frequency Response: 20~20K Hz, Impedance: 32 Ohms, Sensitivity: 110db ± 2db/Mw
- Cable Length: 1.5m
- Plug: 3.5mm Stereo + Dual Mono Adaptor
- Power Source: 2 X AAA Batteries



PHPNC45 High-Fidelity Noise-Canceling Headphones With Carrying Case

- Reduces Ambient Noise By 95%
- Ergonomically Designed For Maximum Comfortable Listening Experience
- Up To 20dB Of Noise Cancellation; Effectively Reduces Aircraft Or Subway Engine Noise
- Larger 40mm Driver With Clear Sound And Well Defined Bass
- Frequency Response: 30 - 20000 Hz
- Speaker Type: 40mm Mylar
- Cone Impedance: 32ohm
- Noise Reduced Over Frequencies 70 - 1200 Hz
- 2 X AAA Batteries Required
- Cable Length: Detachable 1.0m
- Connects With 3.5mm Stereo Jack
- Included Accessories: Detachable Audio Cable, 1/4-Inch Stereo-Plug Adapter, Dual-Plug Adapter (For Airplane), Hard Carry Case



PPCM20 Wireless Headset/Headphones With Base Station and USB Transmitter for PC/Mac For Video/Voice Chat

- Advanced Wireless And Digital Technologies Provides Stereo Hi-Fidelity Without Wires
- PC With USB Audio Streaming Capability Through USB Port
- Microphone Function Via USB
- Devices With Audio Out Connectors Like TV, iPod, MP3, MP4, CD Player, Etc. Can Also Be Connected
- When Fully Charged, The Built-In Rechargeable Battery Can Support About 8 Hours Operation Time
- Mini USB Transmitter
- Active Noise Reduction Function
- Rechargeable Batteries Built-In To Headset
- USB To MINI-USB 5PIN Charging Cable
- Frequency Carrier: 2.4ghz
- Reception Range: 10m 360°
- Transmit Power: 4dbm
- Frequency Range: 2.4G ~ 2.48ghz
- Frequency Response: 20- 20000Hz
- S/N Ratio: >80db
- Distortion: <0.1%
- Working Power: 3.5-4.2V
- Speaker Size: 30mm
- Headset Size: 2.16" x 5.12" x 5.71"
- Headset Weight: 8 Oz.



PHPW2 FM Hi-fi Wireless Headphones with Extreme Bass

- Wireless Reception from TV
- Wired Reception to Mp3 Player
- FM Radio and Wired Reception from PC, CD, DVD Players
- Reception Frequency Range: 85MHz~108MHz
- Driver Size: 40mm
- Sensitivity (S.P.L): 105dB±3dB/MW (at 1 KHz)
- Impedance: 32 Ohms ± 15%
- Frequency Response: 20~20,000Hz
- Signal/Noise Ratio: >50dB
- Headphone: DC 3V (2x1.5V AAA batteries)
- Transmitter: DC 3V (2x1.5V AAA batteries)
- Maximum operation distance: 100FT, 360°



PHPW5 Professional 5 in 1 Wireless Headphone System

- Wireless Headphone Suitable for Listening to Any Device with an Audio Output
- Wireless Monitor for Monitoring Sound from Any Room (e.g., Monitoring Baby)
- High Powered Signal with Effective Long Range
- Built in Microphone for Web Chat
- Hi-Fi & Bass Effect for Superior Sound Performance
- Built in FM Radio
- Product Dimensions: 6.8 x 3.3 x 8.4
- Weight .63Lbs



PIH20 UHF Wireless Headphones with iPhone/iPod Dock Transmitter and Aux Input

- Universal iPod Dock Plays And Charges All Docking iPod Models
- Auxiliary Connection Lets You Listen To Non-Docking iPod Models, TV/CD/DVD/MP3 Or Any Audio Systems
- Several Headphones Can Be Used Simultaneously With One iPod Transmitter
- Working Distance Up To 150 Feet With Our Latest RF Wireless Technology
- Auto Mute And Auto Running Function Available For Headphones
- Double PLL System For Ultimate Frequency Stability
- Active Noise Reduction System For Crystal Clear Sound
- System: UHF/RF
- Carrier Frequency: 915mhz
- S/N Ratio: 75db(Minimum)
- Channel Separation: 35db (Minimum)
- Distortion: 1% (Maximum)
- Frequency Response: 30 - 20,000Hz
- Power Supply Of Transmitter: DC12V 150mA
- Power Supply Of Headphone: 2 AAA Batteries



iPhone Not Included

PIH30R UHF Wireless Stereo Headphone with Wireless iPhone/iPod Dock Transmitter and RF Remote Control

- UHF Wireless Stereo Headphone With Wireless iPod Dock Transmitter And RF Remote Control
- Universal iPod Dock Plays And Charges All Docking iPod Models
- Auxiliary Connection Lets You Listen To Non-Docking iPod Models,
- TV/CD/DVD/MP3 Or Any Audio System
- Remote Offers Many Buttons For Easy Control And More From Across The Room.
- Remote Can Be Used Thru Walls
- Several Headphones Can Be Used Simultaneously With One iPod Transmitter
- Working Distance Up To 150 Feet With Our Latest RF Wireless Technology
- Auto Mute And Auto Running Function Available For Headphones
- Double PLL System For Ultimate Frequency Stability
- Active Noise Reduction System For Crystal Clear Sound
- System: UHF
- Carrier Frequency: 915mhz
- S/N Ratio: 75db(Minimum)
- Channel Separation: 35db(Minimum)
- Distortion: 1%(Maximum)
- Frequency Response: 30 - 20,000Hz
- Power Supply Of Transmitter: DC12V 150ma
- Power Supply Of Headphone: 2 AAA Batteries
- Power Supply Of Remote Control: Button Batter



iPhone Not Included

PT260A 200 Watts Digital AM/FM Stereo Receiver

- Power main: 50W x 2 @ 8 ohm 100W x 2 @ 4 ohm
- Stereo Amplifier With A/B Speaker Output
- AM/FM Radio With Digital Display Screen
- Auto Scan, Memory, Radio Station PREVIOUS/NEXT control
- 50 Radio Station Pre-Set Memory
- Volume/Balance/TREBLE/BASS Gain Control For Main Channel
- VOLUME/BASS/TREBLE/ECHO Control For Microphone
- Two Microphone Input JackS
- Three RCA Input Source
- 110/220V power switch
- AM/FM Antenna Included
- Dimension: 17" x 11.5" x 4.7"
- Weight: 14.3 LBS



PT380AU 200 Watt Digital AM/FM Stereo Receiver For Home System

- Powers 4 loudspeakers
- USB reader function
- AM/FM radio with digital display screen
- Auto scan, radio station PRE/NEXT control
- Remote control included
- 50 radio station pre-set memory
- Volume/balance/treble/bass gain control for main channel
- Volume/bass/treble/echo control for microphone
- Two microphone input jacks
- Two RCA input source
- 110V/220V power switch
- AM/FM antenna included



PT390AU 300 Watt Digital AM/FM Stereo Receiver For Home System

- Powers 4 loudspeakers
- USB reader function
- AM/FM radio with digital display screen
- Auto scan, radio station PRE/NEXT control
- Remote control included
- 50 radio station pre-set memory
- Volume/balance/treble/bass gain control for main channel
- Volume/bass/treble/echo control for microphone
- Two microphone input jacks
- Two RCA input source
- 110V/220V power switch
- AM/FM antenna included



Complete Product Catalog

PT560AU 300 Watts Digital AM/FM/USB Stereo Receiver

- Power main: 150W x 2 @ 8 ohm; 300W x 2 @ 4 ohm
- AM/FM Tuner W/Digital Display Screen
- AUTO SCAN, MEMORY, Radio Stations Pre/Next control
- Play/Pause/PRE/Next/Stop Control for USB Function
- Volume/Bass/Treble/Balance control for Main Channel
- Volume/Bass/Treble/Echo Control for Microphone
- Stereo Receiver Amplifier With four Speaker Output (A/B) binding post terminals
- Stereo Amplifier With A/B Speaker Output
- AM/FM Radio With Digital Display Screen
- 50 Radio Station Pre-Set Memory
- USB flash drive Reader function
- Control For Main Channel
- TWO RCA Input Source
- Three RCA Input Source
- Control For Microphone
- Two Microphone input Jack
- Remote Control Included
- 110V/220V Power Switch
- Dimension: 19" x 11.4" x 4.7"
- Weight: 11.5 LBS



PT530A Two Channel 350 Watts Built-In AM/FM Radio Amplifier Receiver

- 2 Channel Amplifier
- Built-In AM/FM Radio
- 2 MIC Input, Treble and Bass of MIC Adjustable, Independent MIC Volume Control
- Over Current Protection, Short Circuit Protection And Over Voltage Protection
- 12 Preset Radio Station
- Full Remote Control• VFD Display• Power Output: 350W for L, R Channel (4 Ohms)• Input Selector: 3 Stereo RCA Selector, 1AM/FM Radio, 2 Microphone Input
- Output: 2 Channel Speaker Output Terminal for L, R
- Dimensions: 19.7" x 15.7" x 7.7"



PT570AU 5.1 Channel 350 Watt Amplifier Receiver with Built-In AM/FM Radio, USB Flash & SD Card Readers

- VFD Display
- 2 Microphone Inputs
- Built-In AM/FM Radio
- 5.1 Channel Amplifier
- 12 Preset Radio Station
- Wireless Remote Control
- Built-In USB and SD Audio
- Total Power Output: 350 Watt
- Treble/Bass & Independent MIC Volume Controls
- Over Current, Short Circuit, & Over Voltage Protection
- Input Selectors: 3 Stereo RCA Selector, 1 AM/FM Radio, 1 USB port & 1 SD Memory Card Slot
- Output: 5 Channel Speaker Output Terminals for L, R, Center, SL, SR, And 1 Line Out for Subwoofer



PT980AUH 7.1 channel 350 Watts Build-In AM/FM Radio /USB/SD card HDMI Amplifier Receiver

- 7.1 Channel Amplifier.
- 4 HDMI Input Port and 1 HDMI Output Port for HDMI Receiver and HDMI Switcher (With 3D Pass Through).
- One Key Switch Function Between HDMI Receiver and HDMI Switcher.
- Built-In AM/FM Radio.
- Built-In USB and SD Audio.
- 2 MIC Input, Treble and Bass of MIC Adjustable, Independent MIC Volume Control.
- Over Current Protection, Short Circuit Protection And Over Voltage Protection.
- 12 Preset Radio Station.
- Full Remote Control.
- VFD Display.
- Power Output: 300W for L,R Channel (4 Ohm) 50W for Center, Surround L and Surround R(4 Ohm), side Surround L and side Surround R(4 Ohm).
- Inout Selector: 4 in 1 out HDMI Selector, 3 Stereo RCA Selector, 1AM/FM Radio, 1 USB/SD, 2 Microphone Input.
- Output: 7 Channel Speaker Output Terminal for L, R, Center, SL, SR,RR,RL And 1 line Out for Subwoofer.



PT588AB 5.1 Channel Home Receiver with AM/FM, HDMI and Bluetooth

- 5.1 Channel Amplifier
- Bluetooth Compatible - Play Music From a Digital Music Player or Phone
- 4 HDMI Inputs, 1 HDMI Output
- 3D Passthru Compatible
- One Key Switch Function Between HDMI Receiver and HDMI Switcher
- Built-In AM/FM Radio with 12 Presets
- Built-In Bluetooth Receiver
- 2 Mic Inputs With Volume, Treble, Bass, Delay and Echo Controls - Perfect for Karaoke
- Over Current, Short Circuit, and Over Voltage Protection
- Wireless Remote Control Included
- VFD Display
- Dimensions (WxDxH): 16.9" x 13.0" x 4.92"
- Color: Black



PT590AU 5.1 Channel 350 Watts Built-In AM/FM Radio/USB/SD Card HDMI Amplifier Receiver W/3D Pass-Thru

- 5.1 Channel Amplifier
- 4 HDMI Input Port and 1 HDMI Output Port for HDMI Receiver and HDMI Switcher (With 3D Pass Through)
- One Key Switch Function Between HDMI Receiver and HDMI Switcher
- Built-In AM/FM Radio
- Built-In USB and SD Audio
- 2 MIC Input, Treble and Bass of MIC Adjustable, Independent MIC Volume Control
- Over Current Protection, Short Circuit Protection And Over Voltage Protection
- 12 Preset Radio Station
- Full Remote Control
- VFD Display
- Total Power Output: 350 Watts
- 300 Watts L/R Channel (4ohm) 50W for Center, Surround L and Surround R(4Ohm)
- Inout Selector: 4 in 1 out HDMI Selector, 3 Stereo RCA Selector, 1AM/FM Radio, 1 USB/SD 2 Microphone Input
- 3D Pass Thru
- Output: 5 Channel Speaker Output Terminal for L,R,Center, SL, SR, And 1 line Out for Subwoofer
- Dimensions: 16.9" x 6" x 12.9"
- Total Power Consumption: 300W
- 110v Power



PTAU55 Stereo Power Amplifier - 2 x 120 Watt with Blue LED Display, USB/SD/MMC Card, AUX, CD & Mic Inputs

- Blue Luxury LED Display for MP3 Function
- Double-decoder MP3 Function compatible w/ USB Memory Sticks/ MP3/WMA Files
- RCA REC Output
- 1/4" MIC Input Jack
- 1/4" Headphone Output Jack
- Power ON/OFF LED Indicator
- Blue LED Output Level Indicators
- Balance, Treble, Bass and Master Volume Control
- Mic Volume Control
- 110/220 Voltage Selector
- 3.5mm Aux CD/MP3 Input Jack
- Switchable AUX1, AUX2, CD/USB Input
- Four Push Type Speaker L/R Terminals
- Dimensions: 8.27"W x 2.72"H x 5.39"D



PT4601AIU 500 Watt Stereo Receiver AM-FM Tuner/USB/SD/Ipod Docking Station & Subwoofer Control

- iPod docking station, suitable for all iPod & iPhone (Ipod not included)
- USB/SD Card MP3 Player
- A/B Speaker Output
- Separate gain control for subwoofer
- 50 Radio Station Memory
- Microphone Volume/Tone/Echo Control
- 500 watt peak power
- 200 watts x 2 @ 8 ohms RMS
- 100 watts x 2 @ 4 ohms RMS
- Inputs: RCA (2 audio sources)
- Outputs: Banana binding post (to speakers)
- 2 mono RCA dedicated for subwoofer output
- Digital fluorescent output display meter
- iPod / MP3 input with cable
- 110-220V Switchable
- AM/FM Quartz Synthesized Tuner
- Auto Station Seek



PT270AIU 300 Watt Stereo Receiver with Built-In iPod Docking Station -AM-FM Tuner, USB Flash & SD Card Readers & Subwoofer Control

- Auto Station Seek
- A/B Speaker Output
- 110-220V Switchable
- USB/SD Card MP3 Player
- 50 Radio Station Memory
- Inputs: RCA (1 Audio Source)
- Total Power Output: 600 Watt
- AM/FM Quartz Synthesized Tuner
- Separate Subwoofer Gain Controls
- Digital Fluorescent Output Display Meter
- Microphone Volume, Tone & Echo Controls
- 2 Mono RCA Dedicated for Subwoofer Output
- Outputs: Banana Binding Post (to Speakers)
- iPod / MP3 Input with Included Connection Cable
- iPod Docking Station, Suitable for All iPod & iPhone Models
- (USB, SD Memory & iPod Not Included)
- 150 Watts x 2 @ 8 Ohms
- 175 Watt x 2 @ 4 Ohms



PD1000A 1000 Watt AM-FM Receiver w/ Built-in DVD/MP3/USB

- Powers 4 Loud Speakers
- Separate Gain Control for DVD/ Tuner/ USB/ MP3
- Multi Media Disc Formats Compatible (DVD/CD/VCD/ CD-R/CD-RW/MP4)
- Digital Colorful Fluorescent Display
- 50 Stations AM/FM Memory Presets, Auto Station Seek/ Store
- AUX Input (iPod/MP3 w/ Cable)
- USB Reader Function (For Use w/ Portable USB Drives)
- A/B Audio Switch
- AM/FM Quartz Synthesized Radio Tuner
- Visual Power Level DB Display
- Subwoofer Line Audio Output
- RGB/RCA/S-Video Outputs
- 1000 Watts Peak Power
- 200 Watts x 2 @ 8 Ohms
- 360 Watts x 2 @ 4 Ohms
- 450 Watts x 2 @ 2 Ohms
- 110/220 Volt Switchable Power Source
- Unit Dimensions: 16.92"W x 5.12"H x 12"D



PD3000A 3000 Watt AM-FM Receiver w/ Built-In DVD/MP3/USB

- Powers 4 Loud Speakers
- Separate Gain Control for DVD/ Tuner/ USB/ MP3
- Multi Media Disc Formats Compatible (DVD/CD/VCD/ CD-R/CD-RW/MP4)
- Digital Colorful Fluorescent Display
- 50 Stations AM/FM Memory Presets, Auto Station Seek/ Store
- AUX Input (iPod/MP3 w/ Cable)
- USB Reader Function (For Use w/ Portable USB Drives)
- AM/FM Quartz Synthesized Radio Tuner
- Visual Power Level DB Display
- Subwoofer Line Audio Output
- A/B Audio Switch
- RGB/RCA/S-Video Outputs
- 3000 Watts Peak Power
- 300 Watts x 2 @ 8 Ohms
- 550 Watts x 2 @ 4 Ohms
- 800 Watts x 2 @ 2 Ohms
- 110/220 Volt Switchable Power Source
- Unit Dimensions: 16.92"W x 5.12"H x 12"D



PT600A 300W Stereo Receiver / Amplifier

- 6 Inputs Tuner, Tape, CD, Aux, AV1, AV2
- Mic Input with Level Control
- Multifunction Remote Control
- Preset EQ Pop, Rock, Classic, Flat
- Bass Treble Controls
- Front Panel Headphone Jack
- Data Link Ports Interfaces with Compatible Components
- Binding Post Speaker Connections
- External EQ Send/Return Loop
- Frequency Response: 20 to 20 KHz
- Rack Mounting Hardware Included
- 110V/220V Switchable
- Dimensions: 16.5"W x 5.5"H x 9"D



Complete Product Catalog

PT1100 1000 Watt Power Amplifier

- 1000 watts peak power
- 450 watts @ 2 ohms
- 360 watts @ 4 ohms
- 200 watts @ 8 ohms
- Inputs: RCA (4 audio sources)
- 1 RCA dedicated for record line output
- Two Microphones Input Jacks
- Master Volume Controls w/Blue LED
- Heavy Duty Fan Cooling
- A/B Speaker Selector
- Removable rack-mount brackets
- 3U Height w/ Remote
- 110-220V Switchable
- Dimensions: 19"W x 5.1"H x 12.1"D
- Weight: 14.3 lbs (6.5 kg)



PT3300 3000 Watt Power Amplifier

- 3000 watts peak power
- 800 watts @ 2 ohms
- 550 watts @ 4 ohms
- 300 watts @ 8 ohms
- Inputs: RCA (4 audio sources)
- 1 RCA dedicated for record line output
- Two Microphones Input Jacks
- Master Volume Controls w/Blue LED
- Heavy Duty Fan Cooling
- A/B Speaker Selector
- Removable rack-mount brackets
- 3U Height w/Remote
- 110-220V Switchable
- Dimensions: 19"W x 5.1"H x 12.1"D
- Weight: 15.4 lbs (7 kg)



PT8000CH 19" Rack Mount 8000 Watt 8 Channel Stereo/Mono Amplifier

- 1000 Watts Peak x 8 Channel Output
- Five Color LED Display Graphic Volume Display
- 4 Channel Capable Bridgeable Amplifier
- Independent Channel Level Controls
- Each Channel can be set is a Left/Right/Mono of the Bus/AUX Input
- Adjoining Channels are Bridgeable
- Individual Channel protection circuitry.
- DC 12 Volt Control Output Allows For Remote Trigger Of Auxiliary Devices
- Pass Through Output Allows Linking(Daisy-Chaining) of Additional Amplifiers
- 5 Way Speaker Binding Posts (Banana Plug) Outputs
- 4U Rack Space
- Dimension: 19"W x 19.3"D x 7.1"H
- Weight: 48.5 LBS



PAMP1000 160 Watt Home Stereo Power Amplifier

- Power On/Off Switch & LED Indicator
- Speaker A/B Channel Selectors & LED Indicators
- Balance Control
- Volume Control
- Auto On Switch
- Auto Input Switching
- 2 Stereo Line Inputs
- 1 Stereo Line Output
- Stereo/Bridged Mode Selector
- Speaker A/B Binding Post Terminals
- Bridgeable Output
- Replaceable Fuse
- Unswitched 200W Max AC Outlet
- 110/220 Voltage Selector
- Detachable Power AC Input
- Dimensions: 16.5"W x 2.36"H x 8.2"D



PD450A Professional PA Amplifier w/Built In DVD/CD/MP3/USB/70v Output

- With USB Port, DVD Player (Anti-Shock)
- Compatibility with DVD/CD/CD-R/CD-RW/MP3
- Output Regulation: Less than 2dB no Load to Full Load
- Speaker Output: 4 Ohm(20V) 8 Ohm(28.3V) 16 Ohm(40V) 70V Line Out: 1V±0.3V
- Frequency Response: 20Hz a 20Khz
- Harmonic Distortion: 1%
- S/N Rotie: < 75dB
- 2 Mic Input with Volume Control
- 1 AUX Input with Volume Control
- DVD/AUX Volume Control
- 400 Watts
- Indicator: LED Output Level Master
- AC Power Supply: 110-127/220-240 AC 50/60 Hz
- DC Power Supply: 12V or 24V Battery



PD750A Professional PA Amplifier w/Built In DVD/CD/MP3/USB/70v output

- With USB Port, DVD Player (Anti-Shock)
- Compatibility with DVD/CD/CD-R/CD-RW/MP3
- Output Regulation: Less than 2dB no Load to Full Load
- Speaker Output: 4 Ohm(20V) 8 Ohm(28.3V) 16 Ohm(40V) 70V Line Out: 1V±0.3V
- Frequency Response: 20Hz a 20Khz
- Harmonic Distortion: 1%
- S/N Rotie:≤75dB
- 2 Mic Input with Volume Control
- 1 AUX Input with Volume Control
- DVD/AUX Volume Control
- 700 Watts
- Tone Controls: ± 10dB at 100Hz Treble ±10dB at 10KHz
- Indicator: LED Output Level Master
- AC Power Supply: 110-127/220-240 AC 50/60 Hz
- DC Power Supply: 12V or 24V Battery



PT720A 1000 Watts AM/FM/ Tuner Hybrid Amplifier W/ 70V Output w/Built In Auto Mute Function And Music On Hold Output

- 1000 Watts Peak Power
- 450 watts @ 2 ohms
- 360 watts @ 4 ohms
- 200 watts @ 8 ohms
- IPOD/MP3 Input With 3.5MM Cable
- 110-220V Switchable
- Digital Fluorescent Output Display Meter
- AM/FM Quartz Synthesized Tuner
- Auto Scan, PRE/NEXT/MEMORY/STORE For Radio Stations, 50 Stations Storage
- Removable Rack-Mount Brackets
- Auto Mute Function And Music On Hold Output With Separate Level Control
- All Blue LED's /Lights Gain Control Through LED DIMMER
- Remote Control Included



PCM20A 40 Watt Power Amplifier w/ 25 & 70 Volt Output

- Power On/Off Switch & LED Indicator
- MIC 1 Output Level Control
- MIC 2 Output Level Control
- AUX Output Level Control
- Bass and Treble Tone Controls
- MIC 1 Front Located 1/4" Input Jack
- MIC 2 Front Located 1/4" Input Jack
- AUX Front Located 1/4" Input Jack
- MIC 1 Auto Talkover
- Speaker Terminals (COM/8-Ohm/25V/70V)
- Replaceable Fuse
- 110/220 Voltage Selector
- Detachable AC Power Input
- Dimensions: 7.87"W x 3.15"H x 5.9"D



PCM30A 60 Watt Power Amplifier w/ 25 & 70 Volt Output

- Power On/Off Switch & LED Indicator
- MIC 1 Output Level Control
- MIC 2/AUX Output Level Control
- Bass and Treble Tone Controls
- AUX RCA Input
- MIC 2/AUX Input Selector Switch
- MIC 1/MIC 2 Terminals (MIC 1 Auto Talkover)
- Mute Terminals
- Monitor 600-Ohm 1V Terminals (Music On Hold)
- Monitor 1W 8-Ohm Terminals (Music On Hold)
- Monitor Output Level Control (Music On Hold)
- TEL/PAGING Terminals
- Paging Output Level Control
- MIC/TEL VOX Level Control (Internal)
- MIC 1 XLR Connector
- MIC 1 VOX (Auto-Talkover) Switch
- Monitor 600-Ohm 1V Terminals (Music On Hold)
- Monitor 1W 8-Ohm Terminals (Music On Hold)
- Monitor Output Level Control (Music On Hold)
- Speaker Terminals (COM/4-ohm/8-Ohm/16-Ohm/25V/70V)
- Replaceable Fuse
- Unswitched 500W Max AC Outlet
- 110/220 Voltage Selector
- Detachable AC Power Input
- Dimensions: WxHxD: 10.7"W x 3.46"H x 8.86"D



PCM60A 100 Watt Power Amplifier w/ 25 & 70 Volt Output

- Power On/Off Switch & LED Indicator
- AUX 1/MIC 1 Output Level Control
- AUX 2/MIC 2 Output Level Control
- AUX 3/MIC 3 Output Level Control
- Bass and Treble Tone Controls
- Contour Control on/off Loudness Switch
- AUX RCA Output
- AUX 1/AUX2/AUX 3 RCA Input
- AUX/MIC Input Selector Switch
- Mute Terminals
- MIC 1/MIC 2/MIC 3 Terminals (MIC 1 Auto Talkover)
- TEL/PAGING Terminals
- Paging Output Level Control
- MIC/TEL VOX Level Control (Internal)
- MIC 1 XLR Connector
- MIC 1 VOX (Auto-Talkover) Switch
- Monitor 600-Ohm 1V Terminals (Music On Hold)
- Monitor 1W 8-Ohm Terminals (Music On Hold)
- Monitor Output Level Control (Music On Hold)
- Speaker Terminals (COM/4-ohm/8-Ohm/16-Ohm/25V/70V)
- Replaceable Fuse
- Unswitched 500W Max AC Outlet
- 110/220 Voltage Selector
- Detachable AC Power Input
- Dimensions: 16.93"W x 3.46"H x 10.51"D



PMSA20 50 Watt PA Mini Amplifier

- 50 Watts RMS
- Impedance 4/8 ohms
- Power On/Off Switch with LED indicator
- MIC 1 / MIC 2/ AUX 1/4" Inputs
- Individual Volume Controls
- Removable AC Cord
- Power Input: AC 110V 60HZ
- Power Input: DC 12V Inlet
- Dimensions: 2.5"H x 8"W x 7.9"D



PT110 80 WATT AC/DC Microphone PA Mono Amplifier w/ 70V Output & Mic Talkover

- 1/4" Phone Jack
- LED Level Display
- Master Volume Control
- Tone Control
- Mix Bus Jacks
- Front 3.5mm AUX CD Input Jack
- MIC 1/MIC 2 Talkover
- DC 12V Inlet
- Phono/Aux Volume Control
- Mic 1 Mic 2 Volume Controls
- Mic 1 Mic 2 6.35mm Connectors
- Voltage Selector 110/220V
- Removable AC Cord
- Unswitched AC Outlet
- Phono/Aux/RCA Input Jacks
- Phono/Aux Input Selector
- Variety of Speaker Outputs Terminal
- Dimensions: 3 1/3" H x 12 3/4" W x 8 9/10" D



PT210 120 WATT MICROPHONE PA Mono Amplifier w/70V Output & Mic Talkover

- Power On/Off with LED Indicator
- 1/4" Phone Jack
- LED Level Display
- Master Volume Control
- High/Mid/Low Tone Controls
- Front 3.5mm AUX CD Input Jack
- MIC 1 Talkover
- Phono/Aux Volume Control
- Mic 1 Mic 2 Volume Controls
- Mic 1 Mic 2 6.35mm Connectors
- Voltage Selector 110/220V
- Removable AC Cord
- Unswitched AC Outlet
- Mix Bus Jacks
- Phono/Aux/RCA Input Jacks
- Phono/Aux Input Selector
- Variety of Speaker Outputs Terminal
- Dimensions: 3 1/3" H x 12 3/4" W x 8 9/10" D



Complete Product Catalog

PT610 19" Rack Mount 600 Watt Power Amplifier/Mixer w/ 70V Output & Mic Talkover

- 5 Channel Mixer
- 4 Mic Inputs XLR & 1/4" Combo Jack
- 2 Line Inputs RCA
- CH4 Mic/Line Switchable
- Effects Loop RCA In/Out
- Front 3.5mm AUX CD Input Jack
- 4 ohm, 8 ohm, 16 ohm & 70V Screw Terminals
- 8 ohm 1/4" and Binding Post Outputs
- Illuminated VU Output Level Meter
- Feedback Filter with Rotary Control
- MIC 1 Talkover
- Headphone Output
- Rotary Channel & Master Level Controls
- Thermal Overload Protection w/ Indicator
- Clip LED Indicator
- Ground Screw
- 2U Rack Mountable
- 110/220 Voltage Selector
- Dimensions: 4 3/16"H x 19.0"W x 12"D
- Weight: 22.3 lbs



PT710 19" Rack Mount 2000 Watt PA Amplifier with 3 Way Frequency Selectors

- Three XLR Microphone Input Jack with Sensitivity Selector (25dB, 35dB, 45dB) and Frequency Selector (200, 300, 400)
- Three Line Input (RCA / 1/4" TPS Balanced Jack / 3.5mm Input Jack) with Frequency Selector (50Hz, 100Hz, 200Hz)
- Three Output (one RCA, two 1/4" TPS Balanced Jack)
- 80 Watts RMS @ 8 Ohms
- 120 Watts RMS @ 4 Ohms
- 2000 Watts Peak @ 4 Ohms
- S/N: 102dB
- Master Volume/Low/High Control for main Channel
- MIC Volume Control with Frequency Selector (500, 1K, 3K, 7K, 10K) +/-15dB Special Frequency Volume Provider Selector
- Repeat/Echo/Delay Control for Microphone Echo
- 3 Combo Microphone Inputs XLR / 1/4" Jacks
- +18 Volts Phantom Power Switch
- 3 Gain/Sensitivity Microphone Input Selector (25db-35db-45db)
- Echo Delay Repeat Controls For Microphone Inputs
- 2 RCA Plug Line Level Input
- 1 x 1/4" TPS Balanced Audio Input
- 3 x Microphone Inputs With Frequency And Sensitivity Controls
- 3.5 mm Aux Audio Input
- L.E.D. Level Meter Output
- Send And Return Jacks 1/4"
- 2 RCA Audio Record Line Output
- Line Bass And Treble Controls
- Master Volume Control
- 2 Channels Or Bridged Speaker Output
- Cooling Fan
- Rack Mount Brackets
- 110V/220V Switch-able Power Source
- Dimensions: 19"w X 3.1"h X 12"d
- Weight: 14.3 Lbs



PVA2 60 Watts Hi-Fi Mini Stereo Amplifier

- Power Output: 2 x 12w (8 Ohm, RMS)
- Power Output: 2 x 24w (4 Ohms RMS)
- Power Output: 60w Max Peak
- 2 Microphone Inputs
- 2 Mic Volume Controls
- Echo Control
- DVD VCD-CD Tape Karaoke Input Selector
- Treble/Bass Controls
- Master Volume Control
- Power Voltage: 110v
- Frequency Range: 20-20khz
- Input Sensitivity/Impedance: 265mv/1khz
- S/N Ratio: 77db
- Input Sensitivity Of Microphone: 8mv
- Thd: 0.3 % (1khz/1w)
- Power Supply: 110v
- Dimensions: 3.3" X 9.8" X 9.1"



PVA3U 60 Watts/ Hi-Fi Mini Amplifier USB/SD Card Player

- USB-SD-/MMC-Card Slot Player
- Compatible With MP3/WMA Files With Shuffle Function
- ID3 Tag Display
- USB/Card, CD, Tuner, AUX Audio Input Selector
- Separate Bass And Treble Controls
- Surround Sound Switch
- Output Power: 2 X 15w (Rms) At 8ohm
- Power Output: 2 X 30w (Rms) At 4 Ohms
- Power Output: 60watts Max Peak And 1% Distortion
- Signal-To-Noise Ratio: 76dB Thd: 0.2%
- Sensitivity: 340mv
- Frequency Response: 100-10kHz +/-2
- (Size 4 X 2cm) With Remote Control
- With Shuffle Function
- Power Supply: 110v
- Dimensions: (H)2.5"x(W)7.8"x (D)5.9"



PCA1 Mini 2X15 W Stereo Power Amplifier

- 2X15W 10% RMS At 4-Ohm
- Power On Led Indicator
- Master Volume Control
- RCA Cable L/R Input
- Four Push Type Speaker L/R Terminals
- Compatible With Any Audio/Computerize Devices
- (MP3) Via 3.5mm To RCA Converter.
- 110/220 Voltage Selector
- Dimensions: 5.61"(W) X 2.17"(H) X 4.21"(D)



PCA2 Stereo Power Amplifier - 2 x 40 Watt Power with RCA Inputs and Push Type Speaker Outputs

- Harmonic Distortion: 0.3%
- 2 x 40 Watt RMS at 4-Ohm
- Blue LED Output Level Display
- Frequency Response: 20Hz-40kHz
- Power Fuse: 1.5 A, 250V Fast-Acting (5 x 20mm)
- Power Requirement: 120V AC 50Hz/230V AC 50Hz
- Tone Controls: Bass & Treble: +/-10dB (100Hz/10kHz)
- Dimensions: 6.3"; W x 2.72"; D x 4.7"; H (190 x 70 x 137mm)



PCA3 Stereo Power Amplifier - 2 x 75 Watt Power with RCA Inputs and Push Type Speaker Terminals

- RCA Jack Input
- 2 x 75 Watt MAX Power
- Push Type Speaker Outputs
- Blue LED Output Level Display
- Power On/Off Switch and LED Indicator

- Treble, Bass and Master Volume Controls
- Compatible With Audio/Computerize Devices (MP3 Players) Via 3.5mm To RCA Converter
- Dimensions: 7.48"W x 2.87"H x 5.39"D



PCA4 Mini 2x120 Watt Stereo Power Amplifier

- 2x120W at 4 Ohm
- Blue LED Output Level Display
- Power on LED Indicator
- 3.5mm Aux CD/MP3 Input Jack
- Treble and Bass Control

- Master Volume Control
- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 8.27"W x 2.72"H x 5.39"D



PCAU11 Mini 2x15 Watt Stereo Power Amplifier w/ USB Input

- 2x15W RMS at 4-ohm
- Compatible w/ USB Memory Sticks & MP3 Files
- Power on LED Indicator
- USB Reader Function
- Master Volume Control

- RCA Cable L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 5.61"W x 2.17"H x 4.21"D



PCAU22 Mini 2x40 Watt Stereo Power Amplifier w/ USB Input

- 2x40W RMS at 4 Ohm
- Compatible w/ USB Memory Sticks & MP3 Files
- Power on LED Indicator
- Treble and Bass Control
- Master Volume Control

- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 6.30"W x 2.72"H x 4.72"D



PCAU33 Mini 2 x 75 Watts Stereo Power Amplifier With USB Input

- 2x75W 10% RMS at 4-ohm
- Blue LED Output Level Display
- Power on LED Indicator
- USB Reader Function
- Treble and Bass Controls
- Master Volume Control

- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- Compatible with Walkman and Computerized Devices (MP3) via 3.5mm to RCA Converter
- 110/220 Voltage Selector
- Dimensions: 7.48"W x 2.87"H x 5.39"D



PCAU44 Mini 2x120 Watt Stereo Power Amplifier w/ USB & CD Input

- 2x120W RMS at 4 Ohm
- Compatible w/ USB Memory Sticks & MP3 Files
- Blue LED Output Level Display
- Power on LED Indicator
- 3.5mm Aux CD/MP3 Input Jack
- Treble and Bass Controls

- Master Volume Control
- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 8.27"W x 2.72"H x 5.39"D



PTA1 Mini 2 X 15 Watt Stereo Power Amplifier with AUX, CD & Mic Inputs

- Headphone Output
- 2 x 15 Watt MAX Power
- 115/230 Voltage Selector
- AUX/CD Input and Selector
- Push Type Speaker Outputs
- Total Harmonic Distortion: 0.3%

- Master Volume and Balance Controls
- Power On/Off Switch and LED Indicator
- MIC 1/4" Jack Input and Volume Control
- Switchable Mic Payer and Mixing (Karaoke) Modes
- Dimensions: 7.48"W x 2.76"H x 5.39"D



Complete Product Catalog

PTA2 Mini Stereo Power Amplifier - 2 x 40 Watt with AUX, CD & Mic Inputs

- RCA REC Output
- Balance Control
- 1/4" Mic Input Jack
- Power On LED Indicator
- Headphone Output Jack
- 110/220 Voltage Selector
- 2 X 40 Watt Max 10% RMS At 4-Ohm
- Four Push Type Speaker L/R Terminals
- Switchable Mic Pager And Mixing Modes
- Switchable RCA Inputs: AUX1, AUX2 & CD
- Bass, Treble, Master Volume & Mic Controls
- Dimensions: 7.48"W x 2.76"H x 5.39"D



PTA4 Mini Stereo Power Amplifier - 2 x 120 Watt with AUX, CD & Mic Inputs

- RCA REC Output
- 1/4" MIC Input Jack
- 1/4" Headphone Jack
- Power On LED Indicator
- 110/220 Voltage Selector
- 2 x 120 Watt RMS at 4-Ohm
- Blue LED Output Level Display
- 3.5mm Aux CD/MP3 Input Jack
- Switchable MIC Pager & Mixing Modes
- Four Push Type Speaker L/R Terminals
- Switchable AUX1/AUX2/CD and RCA Input
- Bass, Treble, Balance, Master & Mic Volume Controls
- Dimensions: 8.27"W x 2.72"H x 5.39"D



PTAU23 Mini Stereo Power Amplifier - 2 x 40 Watt with USB, AUX, CD & Mic Inputs

- RCA REC Output
- 1/4" Phone Jack
- 1/4" MIC Input Jack
- USB Reader Function
- Power On LED Indicator
- 110/220 Voltage Selector
- AUX1, AUX2, CD & RCA Inputs
- 2 x 40 Watt 10% RMS at 4-Ohm
- Four Push Type Speaker L/R Terminals
- Switchable MIC Pager and Mixing Modes
- Switchable AUX1, AUX2, CD, USB Inputs
- Bass, Treble, Balance, Master & Mic Volume Controls
- Dimensions: 7.48"W x 2.72"H x 5.39"D



PTAU45 Stereo Power Amplifier - 2 x 120 Watt with USB, AUX, CD & Mic Inputs

- RCA REC Output
- 1/4" MIC Input Jack
- 1/4" Headphone Jack
- USB Reader Function
- Power ON LED Indicator
- 2 x 120 Watt MAX Power
- 110/220 Voltage Selector
- AUX1, AUX2, CD, RCA Input
- Blue LED Output Level Display
- 3.5mm Aux CD/MP3 Input Jack
- Switchable AUX1, AUX2, CD/USB Input
- Four Push Type Speaker L/R Terminals
- Bass, Treble, Balance, Master Volume & MIC Controls
- Dimensions: 8.27"W x 2.72"H x 5.39"D



PCAU15A Mini 2x15 Watt Stereo Power Amplifier USB/SD/MMC Card Reader w/AUX, CD & Microphone Inputs & Blue LED Display

- Blue Luxury LED Display for MP3 Function
- Double Decoder Digital Media Function w/Remote Control Compatible w/ USB Memory Sticks/ MP3/WMA Files
- Power on Blue LED Circle Indicator
- Master Volume Control
- RCA Cable L/R Input
- 3.5mm/1/8" Aux iPod/iPhone/iPad/CD/MP3 Input Jack
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 5.61"W x 2.17"H x 4.21"D



PCAU25A Mini 2x40 Watt Stereo Power Amplifier USB/SD/MMC Card Reader w/AUX, CD & Microphone Inputs & Blue LED Display

- Blue luxury LED Screen for MP3 Function
- Double Decoder Digital Media Function w/Remote Control Compatible w/ USB Memory Sticks/ MP3/WMA Files
- Power on Blue LED Circle Indicator
- Treble & Bass Control
- Master Volume Control
- RCA Cable L/R Input
- 3.5mm/1/8" Aux iPod/iPhone/iPad/CD/MP3 Input Jack
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 6.30"W x 2.72"H x 4.72"D



PCAU35A Mini 2x75 Watt Stereo Power Amplifier USB/SD/MMC Card Reader w/AUX, CD & Microphone Inputs & Blue LED Display

- Blue luxury LED Screen for MP3 Function
- Double Decoder Digital Media Function w/Remote Control Compatible w/ USB Memory Sticks/ MP3/WMA Files
- Power on Blue LED Circle Indicator
- Blue LED Output Level Indicators
- USB Reader Function
- Treble, Bass, and Master Volume Controls
- RCA Cable L/R Input
- 3.5mm/1/8" Aux iPod/iPhone/iPad/CD/MP3 Input Jack
- Four Push Type Speaker L/R Terminals
- Compatible with Audio/ Computer Device (MP3 Players) Via 3.5mm To RCA Converter
- 110/220 Voltage Selector
- Dimensions: 7.48"W x 2.87"H x 5.39"D



PT504 Rack Mount Am/Fm Digital Tuner W/Auto Start Feature

- 60 (AM+FM) radio station storage
- Tuning/Pre/Next /Auto scan/Store and 1-10+ select keys for tuner
- Rack mount brackets
- 110/220V Switchable
- Clock display(am/pm),can start or off at a set time
- Remote control
- Dimensions: 19"w x 9.4"h x 1.6"d
- Weight: 3.5 lbs



PT652T Digital PLL Quartz Radio Tuner

- AM/FM Quartz Synthesized Tuner
- 20 Station Memory Presets 10 FM / 10 AM
- Auto Station Scanning
- Digital Fluorescent Display
- Mono/Stereo Selector
- Digital Link Interface for Connecting to PT600A
- RCA Preamp Output
- External FM & AM Antennas Included
- Frequency Response: 40 to 14 KHz
- Dimensions: 16.53"W x 3.66"D x 10.03"H
- Rack Mounting Hardware Included
- 110V/220V Switchable



PT649D Dual Cassette Deck

- Auto Stop
- Normal and High Speed Dubbing
- Dynamic Noise Reduction
- CrO2 Tape Selector
- 3 Digit Tape Counter
- Recording Level Control
- Dual Color Multifunction Fluorescent Display
- Rec/Play Level Meters
- Auto tape Selector
- RCA Line Inputs and Outputs
- Digital Link Interface for Connecting to PT600A
- Rack Mounting Hardware Included
- 110V/220V Switchable
- Dimensions: 16.53"W x 5.11"H x 8.66"D



PT659DU Dual Stereo Cassette Deck w/Tape USB to MP3 Converter

- Normal/High Speed copy function (Direct-dubbing from your computer)
- Dynamic Noise Suppression
- Supports CrO2 tapes
- Auto-stop function
- Quickly transfer music on your tapes to MP3 format on your computer
- CrO2 tape selector
- RCA inputs and outputs
- PC and Mac compatible
- Power supply voltage: 110V~60Hz
- Dimensions:16.54"(W) x 8.46"(D)x 5.32"(H)



PSPVC4 4 Channel High Power Stereo Speaker Selector W/volume Control

- Up to 4 Separate Speaker Pairs to your Stereo System
- Accepts Speaker Wires Up to 14- Gauge
- Handles 100Watts Per Channel with Speaker Systems that have a Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps it Running Smoothly
- Individual Speaker Volume Control
- Support Two Stereo Amplifiers
- Frequency Response: 20Hz-20KHz
- Dimensions: 16.92"(W) x 3.03"(H) x 6.29"(D)



PSPVC6 6 Channel High Power Stereo Speaker Selector W/Volume Control

- Up to 6 Separate Speaker Pairs to your Stereo System
- Accepts Speaker Wires Up to 14- Gauge
- Handles 100Watts Per Channel with Speaker Systems that have a Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps it Running Smoothly
- Individual Speaker Volume Control
- Support Two Stereo Amplifiers
- Frequency Response: 20Hz-20KHz
- Dimensions: 16.92"(W) x 3.03"(H) x 6.29"(D)



Complete Product Catalog

PSS4 4 Channel High Power Stereo Speaker Selector

- Up to 4 Separate Speaker Pairs to Your Stereo System
- Accepts Speaker Wires up to 14-Gauge
- Handles 100Watts per Channel w/ Speaker Systems That Have Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps It Running Smoothly
- Frequency Response: 20Hz-20KHz
- Dimensions: 7.48"(W) x 1.97"(H) x 4.72"(D)



PSS6 6 Channel High Power Stereo Speaker Selector

- Up to 6 Separate Speaker Pairs to Your Stereo System
- Accepts Speaker Wires up to 14-Gauge
- Handles 100Watts per Channel w/ Speaker Systems That Have Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps It Running Smoothly
- Frequency Response: 20Hz-20KHz
- Dimensions: 9.05"(W) x 1.85"(H) x 5.90"(D)



PSS8 8 Channel High Power Stereo Speaker Selector

- Up To 8 Separate Speakers Pair To Your Stereo System.
- Accepts Speaker Wires Up To 14-Gauge.
- Handles 100 Watts Per Channel With Speaker Systems That Have A Minimum Impedance Of 8 Ohms.
- Protection Circuitry Keeps It Running Smoothly
- Frequency Response: 20Hz-20KHz
- Dimensions 12.8" X 2.04" X 6.12"



PRJS56B 5" 20 Watt Ceiling Hanging Pendant Speaker w/ 70V Transformer (Black)

- 5" 20 Watts Speaker indoor Ceiling Hanging Mount
- Power/Load Rating: 20Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 10 / 5 / 2.5
- Frequency Range: 130 Hz - 17 KHz
- SPL(@ 1W/1m): 90dB
- Mounting Bracket & Hardware Included
- Simply Hang speaker with Included chain
- Dimensions: 5.5" H x 5.5" W x 8" D



PRJS56W 5" 20 Watt Ceiling Hanging Pendant Speaker w/ 70V Transformer (White)

- 5" 20 Watts Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 20Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 10 / 5 / 2.5
- Frequency Range: 130 Hz - 17 KHz
- PL I(@ 1w/1m): 90db
- Mounting Bracket & Hardware Included
- Simply Hang Speaker with Included Chain
- Dimensions: 5.5" H X 5.5" W X 8"D



PRJS66B 6.5" 40 Watt Ceiling Hanging Pendant Speaker w/ 70V Transformer (Black)

- 6.5" Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 40 Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 20 / 10 / 5
- Frequency Range: 100 Hz - 17 KHz
- SPL (@ 1w/1m): 92db
- Mounting Bracket & Hardware Included
- Simply Hang Speaker with Included Chain
- Dimensions: 7" H X 7" W X 9.5"D



PRJS66W 6.5" 40 Watt Ceiling Hanging Pendant Speaker w/ 70V Transformer (White)

- 6.5" Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 40Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 20 / 10 / 5
- Frequency Range: 100 Hz - 17 KHz
- SPL (@ 1W/1m): 92db
- Mounting Bracket & Hardware Included
- Simply Hang Speaker with Included Chain
- Dimensions: 7" H X 7" W X 9.5"D



PBS50B 100 Watts Ceiling Hanging Mount 5" Ball Pendant Speaker (Black Color)

- 5" Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 100Watts
- Nominal Impedance: 8 Ohms
- Frequency Range: 180 Hz - 15 KHz
- SPL(@ 1W/1m): 90db
- Mounting Bracket & Hardware Included
- Dimensions: 7"H X 7"W



PBS5TB Ceiling Hanging Mount 5" 70 Volt 75 Watts Ball Pendant Speaker with 70V, Transformer (Black Color)

- 5" Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 75Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 10 / 5 / 2.5
- Frequency Range: 180 Hz - 15 KHz
- SPL(@ 1W/1m): 90db
- Mounting Bracket & Hardware Included
- Dimensions: 7" H X 7" W



PBS5TW Ceiling Hanging Mount 5" 75 Watts Ball Pendant Speaker With 70V Transformer (White)

- Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 75watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 10 / 5 / 2.5
- Frequency Range: 180 Hz - 15 KHz
- SPL(@ 1w/1m): 90db
- Mounting Bracket & Hardware Included
- Dimensions: 7"H x 7"W



PCSB5

Pair of 5 1/4" Pre-Construction Speaker Brackets

- 5 1/4 inch In-Ceiling Speaker bracket
- For Uses in a New Construction Projects
- Serves as Place Holder
- Metal Wings Easy to Mount at Any Framing Situation
- With Virtually No Rise In Drywall Depth



Speaker are not Included

PCSB8

Pair of 8" Pre-Construction Speaker Brackets

- 8 inch In-Ceiling Speaker bracket
- For Uses in a New Construction Projects
- Serves as Place Holder
- Metal Wings Easy to Mount at Any Framing Situation
- With Virtually No Rise In Drywall Depth



Speaker are not Included

PHSKITS

200 Watts 5 1/4 Dual In-Ceiling Speaker /Volume Contro/Speaker Wall Plate/Wiring Combo Speaker System

- One Pair of 5-1/4" In-Ceiling
- Co-axial Speakers w/ Mylar Tweeter
- 50 Feet of Specially Rated
- 16 Gauge/ 4 Conductor Speaker Cable
- 200 Watts Peak Power
- Stereo In-Wall Mounted Rotary Volume Control
- Enables the User to Control the Volume of the Room
- They are Located
- Provides Clean Wall Jack
- Connections for One Pair of Speakers to Your Audio System



Complete Product Catalog

PHSKIT6 250 Watts 6-1/2" Dual In-Ceiling Speaker /Volume Contro/Speaker Wall Plate/Wiring Combo Speaker System

- One Pair of 6-1/2" In-Ceiling
- Co-axial Speakers w/ Mylar Tweeter
- 50 Feet of Speacially Rated 16 Gauge/ 4 Conductor Speaker Cable
- 250 Watts Peak Power
- Stereo In-Wall Mounted Rotary Volume Control

- Enables the User to Control the Volume of the Room They are Located
- Provides Clean Wall Jack
- Connections for One Pair of Speakers to Your Audio System



PHSKIT8 300 Watts 8" Dual In-Ceiling Speaker /Volume Contro/Speaker Wall Plate/Wiring Combo Speaker System

- One Pair of 8" In-Ceiling
- Co-axial Speakers w/ Mylar Tweeter
- 50 Feet of Speacially Rated
- 16 Gauge/ 4 Conductor Speaker Cable
- 300 Watts Peak Power
- Stereo In-Wall Mounted Rotary Volume Control

- Enables the User to Control the Volume of the Room They are Located
- Provides Clean Wall Jack
- Connections for One Pair of Speakers to Your Audio System



PDIC51RD 5.25" Two-Way In-Ceiling Speaker System

- In-Ceiling 2-Way Speaker System
- 5-1/4" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Polymer Dome Tweeter
- 150 Watts Rated Peak Power

- Frequency Response: 80Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimension: 6 1/2" Diameter x 2 5/8" Depth
- Overall Dimensions: 8" Diameter x 2 5/8" Depth
- Sold as a Pair



PDIC61RD 6.5" Two-Way In-Ceiling Speaker System

- In-Ceiling 2-Way Speaker System
- 6-1/2" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1/2" Polymer Dome Tweeter
- 200 Watts Rated Peak Power

- Frequency Response: 70Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimensions: 7 7/8" Diameter x 2 3/4" Depth
- Overall Dimensions: 9" Diameter x 2 3/4" Depth
- Sold as a Pair



PDIC81RD 8" Two-Way In-Ceiling Speaker System

- In-Ceiling 2-Way Speaker System
- 8" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1/2" Polymer Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 50Hz-20K Hz

- 4-8 Ohm Impedance
- Cut-out Dimensions: 9 3/8" Diameter x 3 1/2" Depth
- Overall Dimensions: 10 1/2" Diameter x 3 1/2" Depth
- Sold as a Pair



PDIC60 250 Watt 6.5" Two-Way In-Ceiling Speaker System

- 6.5" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 65Hz-22kHz

- 4-8 Ohm Impedance
- Cut-Out Dimensions: 7 7/8" Diameter x 2 3/4" Depth
- Overall Dimensions: 9" Diameter x 2 3/4" Depth
- Sold as a Pair



PDIC80 300 Watt 8" Two-Way In-Ceiling Speaker System

- 8" Midbass Speaker
- 1.5" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter
- 4-8 Ohm Impedance
- 300 Watts Rated Peak Power

- Frequency Response: 55Hz-22kHz
- Cut-Out Dimensions: 9 3/8" Diameter x 3 1/2" Depth
- Overall Dimensions: 10 3/4" Diameter x 3 1/2" Depth
- Sold as a Pair



PDIC60T 6.5" Two-Way In-Ceiling Speakers w/70V Transformer

- 70V Transformer, Tapping at: 8 ohm,30W,20W,15W, 10W,5W
- 8 Ohm Impedance
- 6.5" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter

- 250 Watts Rated Peak Power
- Frequency Response: 65Hz-22kHz
- Cut-Out Dimensions: 7 7/8" Diameter x 4 5/8" Depth
- Overall Dimensions: 9" Diameter x 4 5/8" Depth
- Sold as a Pair



PDIC80T 8" Two-Way In-Ceiling Speakers w/70V Transformer

- 70 Volt Transformer, Tapping at: 8 Ohm,50W,40W,30W,20W,10W
- 8 Ohm Impedance
- 8" Midbass Speaker
- 1.5" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter

- 300 Watts Rated Peak Power
- Frequency Response: 55Hz-22kHz
- Cut-Out Dimensions: 9 3/8" Diameter x 5 3/4" Depth
- Overall Dimensions: 10 3/4" Diameter x 5 3/4" Depth
- Sold as a Pair



PDICS54 5" Full Range In Ceiling Speaker System W/Transformer

- 5" Speaker Woofer System
- 0.76" High Temperature Voice Coil
- 1.0" Tweeter Cup
- 100 Watts Peak Power
- Frequency Response: 90-16 KHz

- SPL: 89 dB
- 8 Ohm Impedance
- 100V Transformer
- 8 Ohm/ 5W
- Overall Dimensions: 8.2"(W) x 8.2"(H) x 2.1"(D)



PDICS64 6-1/2" Full Range In-Ceiling Speaker System W/Transformer

- 6-1/2" Speaker Woofer System
- 0.76" High Temperature Voice Coil
- 1.2" Tweeter Cup
- 150 Watts Peak Power
- Frequency Response: 70-16 KHz

- SPL: 89 dB
- 8 Ohm Impedance
- 100V Transformer
- 8 Ohm/ 5W
- Overall Dimensions: 10"(W) x 10"(H) x 2.8"(D)



PDICS8 8" Full Range In-Ceiling Speaker System W/Transformer

- 8" Speaker
- 1" High Temperature Voice Coil
- 1.5" Tweeter Cup
- 200 Watts Peak power
- Frequency Response: 60-16kHz
- 8 Ohm Impedance

- 100V Transformer Tapping At 10W
- SPL: 89dB
- Cut-Out Dimensions: 8" Diameter x 3.15" Depth
- Overall Dimensions: 12.8" Diameter x 3.15" Depth
- Sold as a Pair



PDICS6 6.5" Full Range In-Ceiling Flush Mount Enclosure Speaker System

- 6.5" Speaker
- 1" High Temperature Voice Coil
- 1.5" Tweeter Cup
- 120 Watts Peak power
- Frequency Response: 60-16kHz

- 8 Ohm Impedance
- SPL: 89dB
- Cut-Out Dimensions: 6 3/4" Diameter x 3 1/2" Depth
- Overall Dimensions: 9" Diameter x 3 1/2" Depth



PDICS82 8" Full Range Speaker Flush Mount Enclosure System

- 8" Speaker Woofer System
- 1.0" High Temperature Voice Coil
- 1.5" Tweeter Cup
- 150 Watts Peak Power

- Frequency Response: 60-16 KHz
- SPL: 89 dB
- 8 Ohm Impedance
- Overall Dimensions: 10.6"(W) x 10.6"(H) x 4.4"(D)



Complete Product Catalog

PWRC51 5.25" 2-Way In ceiling Stereo Speaker Weather Proof

- 5 1/4" Polypropylene Woofer With Santoporene Surround
- 200 Watts Power Handling
- 1/2" Polycarbonate Tweeter
- Frequency Response: 65 Hz-22KHz
- 4 Ohm Impedence
- Weather-Resistant Speaker for High Moisture Situation
- Outside Diameter: 8"
- Cut Out Diameter: 6 1/2"
- Mounting Depth: 2 5/6"
- Including Hardware for Easy Installation



PWRC61 6.5" 2-Way In ceiling Stereo Speaker Weather Proof

- 6.5" Polypropylene Woofer With Santoporene Surround
- 300 Watts Power Handling
- 1/2" Polycarbonate Tweeter
- Frequency Response: 60Hz-22KHz
- 4 Ohm Impedence
- Weather-Resistant Speaker for High Moisture Situation
- Outside Diameter: 9"
- Cut Out Diameter: 7 2/3"
- Mounting Depth: 2 6/7"
- Including Hardware for Easy Installation



PWRC81 8" Two Way In Ceiling Stereo Speaker Water Proof

- 8" Polypropylene Woofer With Santoporene Surround
- 400 Watts Power handling
- 1/2" Polycarbonate Tweeter
- Frequency Response: 55 Hz - 22K Hz
- 4 Ohm Impedance
- Weather-Resistant Speakers for High Moisture Situation
- Outside Diameter: 10 3/4"
- Cut Out Diameter: 9 1/3"
- Mounting Depth: 3 2/3"
- Including Hardware For Easy Installation



PWRC52 5.25" In-Ceiling (Dual Channel/ Voice Coil) Weather Proof Single Speaker

- 5.25" In-Ceiling Dual Channel/ Voice Coil Weather Proof Speaker
- 200 Watts Power Handling
- Dual 1/ 2" Polycarbonate Tweeter
- Frequency Response: 65Hz-22KHz
- Dual 8 Ohm Impedence
- Weather Resistant Speakers for High Moisture Situation
- Outside Diameter: 8"
- Cut Out Diameter: 6 1/3"
- Mounting Depth: 2 5/6"
- Including Hardware for Easy Installation



PWRC62 6.5" In-Ceiling (Dual Channel/ Voice Coil) Weather Proof Speaker

- 6.5" In-Ceiling Dual Channel/ Voice Coil Weather Proof Speaker
- 300 Watts Power Handling
- Dual 1/ 2" Polycarbonate Tweeter
- Frequency Response: 60Hz-22KHz
- Dual 8 Ohm Impedence
- Weather Resistant Speakers for High Moisture Situation
- Outside Diameter: 9"
- Cut Out Diameter: 7 2/3"
- Mounting Depth: 2 6/7"
- Including Hardware for Easy Installation



PWRC82 8" In-Ceiling (Dual Channel/ Voice Coil) Weather Proof Speaker

- 8" In-Ceiling Dual Channel/ Voice Coil Weather Proof Speaker
- 400 Watts Power Handling
- Dual 1/ 2" Polycarbonate Tweeter
- Frequency Response: 55Hz-22KHz
- Dual 8 Ohm Impedence
- Weather Resistant Speakers for High Moisture Situation
- Outside Diameter: 10 3/4"
- Cut Out Diameter: 9 1/3"
- Mounting Depth: 3 2/3"
- Including Hardware for Easy Installation



PDPG52 5 1/4" In-Ceiling 2-Way Flush Mount Enclosure Speaker System

- 5-1/4" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Polymer Dome Tweeter
- 150 Watts Rated Peak Power
- Frequency Response: 80Hz-20KHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 7 2/25" (Diameter) x 4 4/5" (Depth)
- Sold as a Pair



PDPC62 6 1/2" In-Ceiling 2-Way Flush Mount Enclosure Speaker System

- 6-1/2" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-20KHz

- 4-8 Ohm Impedance
- Cut-Out Dimensions: 8 7/25" (Diameter) x 5 18/25" (Depth)
- Sold as Pair



PDPC82 8" In-Ceiling 2-Way Flush Mount Enclosure Speaker System

- 8" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Polymer Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 50Hz-20KHz

- 4-8 Ohm Impedance
- Cut-Out Dimensions: 9 17/25" (Diameter) x 5 18/25" (Depth)
- Sold as Pair



PDPC5T 5" In Ceiling Flush Mount Enclosure Speaker System w/Rotary Tapping 70V Transformer

- 5" Long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Mylar Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70 Hz - 20kHz
- 8 Ohm Impedance
- 70V transformer with Rotary Tapping at: 8 Ohm, 0.25W,

- 0.5W, 1W, 2.5W, 5W, 7.5W, 15W, 30W
- Vented Design for High Power and Deep Bass Response
- Cut-out Dimensions: 8 7/25" (Diameter) x 5 18/25" (Depth)
- Sold as Single



PDPC6T In-Ceiling Enclosed Speaker System w/Rotary Tapping 70V Transformer

- 6.5" Long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Mylar Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 60 Hz - 20K Hz
- 8 Ohm Impedance
- 70V transformer with Rotary Tapping at: 8 Ohm, 0.25W,

- 0.5W, 1W, 2.5W, 5W, 7.5W, 15W, 30W
- Vented Design for High Power and Deep Bass Response
- Cut-out Dimensions: 9 12/25" (Diameter) x 5 1 8/25"(Depth)
- Sold as Single



PDPC8T In-Ceiling Enclosed Speaker System w/Rotary Tapping 70V Transformer

- 8" Long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Mylar Dome Tweeter
- 300Watts Rated Peak Power
- Frequency Response: 50 Hz - 20K Hz
- 8 Ohm Impedance
- 70V transformer with Rotary Tapping at: 8 Ohm, 0.25W,

- 0.5W, 1W, 2.5W, 5W, 7.5W, 15W, 30W
- Vented Design for High Power and Deep Bass Response
- Cut-out Dimensions: 11 2/5" (Diameter) x 5 18/25" (Depth)
- Sold as Single



PIC62A 250 Watt 6.5" High Performance Directional Two-Way In-ceiling Speaker System w/Adjustable Treble Control

- Directional Design - Focused Sound
- 5" Polypropylene Cone Full Range Mid-bass Speaker
- Pivoting 1" Voice Coil Silk Dome Tweeter
- Adjustable Treble Control
- 250 Watts Rated Peak Power/ 125 Watts RMS
- Frequency Response: 45Hz-20KHz
- Sensitivity: 88Db
- 4-8 Ohm Impedance
- Cut-out Dimensions: 4.72" x 11.02" x 11.02"
- Net Weight: 1.3Kg
- Including Built-in Mounting Hardware for Easy Installation



Complete Product Catalog

PIC6E 250 Watt 6.5" Two-Way In-ceiling Speaker System w/Adjustable Treble Control

- 6.5" Polypropylene Cone Full Range Mid-bass Speaker
- Pivoting 1" Voice Coil Silk Dome Tweeter
- Adjustable Treble Control
- 250 Watts Rated Peak Power/ 125 Watts RMS
- Frequency Response: 45Hz-20KHz
- Sensitivity: 88Db
- 4-8 Ohm Impedance
- Dimensions: 3.93" x 9.05"
- Net Weight: 1.3Kg
- Includes Built-in Mounting Hardware for Easy Installation



PIC8E 300 Watt High-End 8" Two-Way In-ceiling Speaker System w/Adjustable Treble Control

- 8" Polypropylene Cone Full Range Mid-bass Speaker
- Pivoting 1" Voice Coil Silk Dome Tweeter
- Adjustable Treble Control
- 300 Watts Rated Peak Power/ 150 Watts RMS
- Frequency Response: 35Hz-20KHz
- Sensitivity: 88Db
- 4-8 Ohm Impedance
- Cut-out Dimensions: 4.13" x 11.02"
- Net Weight: 1.5Kg
- Includes Built-in Mounting Hardware for Easy Installation



PDIC65SQ 6.5" Two-Way In-Ceiling Speaker System

- In-Ceiling 2-Way Speaker System
- 6-1/2" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1/2" Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimension: 7 1/4" x 7 1/4" x 3" Depth
- Overall Dimensions: 8 1/2" x 8 1/2" x 3" Depth
- Sold as a Pair



PDIW52 5.25" Two-Way In-Wall Speaker System / Directional Tweeter

- In-Wall 2-Way Speaker System
- 5.25" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-22kHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 6 5/8"W x 10 1/8"H x 2 3/4"D
- Overall Dimensions: 7 5/8"W x 11 1/4"H x 2 3/4"D
- Sold as a Pair



PDIW62 6.5" Two-Way In-Wall Speaker System / Directional Tweeter

- In-Wall 2-Way Speaker System
- 6.5" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1" Titanium Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 65Hz-22kHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 7 3/4"W x 11 3/8"H x 2 7/8"D
- Overall Dimensions: 8 1/2"W x 12 1/4"H x 2 7/8"D
- Sold as a Pair



PDIW55 5.25" Two-Way In-Wall Speaker System

- In-Wall 2-Way Speaker System
- 5-1/4" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1/2" Polymer Dome Tweeter
- 150 Watts Rated Peak Power
- Frequency Response: 80Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimensions: 6 5/8"W x 10 1/8"H x 2 3/4"D
- Overall Dimensions: 7 5/8"W x 11 1/4"H x 2 3/4"D
- Sold as a Pair



PDIW65 6.5" Two-Way In-Wall Speaker System

- In-Wall 2-Way Speaker System
- 6-1/2" Midbass Speaker
- 1" High Temperature Voice Coil
- Directable 1/2 Inch Polymer Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-20K Hz
- 4-8 Ohm Impedance
- Cut-out Dimensions: 7 3/4"W x 11 3/8"H x 2 7/8"D
- Overall Dimensions: 8 3/4"W x 12 1/2"H x 2 7/8"D
- Sold as a Pair



PDIW57 5" Two Way In Wall Enclosed Speaker System w/ Directional Tweeter

- 5.25" long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Titanium Dome Tweeter
- 300 Watts Rated Peak Power
- Frequency Response: 70Hz - 22 KHz

- 4-8 Ohm Impedance
- Vented Design for High Power and Deep Bass Response
- Cut-Out Dimensions: 7.04"(W) x 10.6"(H) x 3.68"(D)
- Sold as One Pair



PDIW67 6.5" Two Way In Wall Enclosed Speaker System w/ Directional Tweeter

- 6.5" long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Titanium Dome Tweeter
- 360 Watts Rated Peak Power
- Frequency Response: 65Hz - 22 KHz
- 4-8 Ohm Impedance

- Vented Design for High Power and Deep Bass Response
- Cut-Out Dimensions: 8.24"(W) x 11.76"(H) x 3.68"(D)
- Sold as One Pair



PDIW87 8" Two Way In Wall Enclosed Speaker System w/ Directional Tweeter

- 8" long Throw Woofer
- 1" High Temperature Voice Coil
- 1" Titanium Dome Tweeter
- 400 Watts Rated Peak Power
- Frequency Response: 50Hz - 20 KHz

- 4-8 Ohm Impedance
- Vented Design for High Power and Deep Bass Response
- Cut-Out Dimensions: 8.84"(W) x 13"(H) x 4"(D)
- Sold as One Pair



PDIWCS56 Dual 5.25" 2 Way-IN-Wall Center Channel Speaker System

- Dual 5.25" Long Throw Woofer
- Video Shielded
- Center/ Left/ Right Channel
- 300 Watts Rated Peak Power
- 1" High Temperature Voice Coil
- 1" Titanium Dome Tweeter
- Electronic Crossover Network
- Variable Boost (+7-3dB)

- Frequency Response 70Hz-22KHz
- 8 Ohm Impedance
- Vented Design for High Power and Deep Base Response
- Overall: 7 2/5"(H) x 15 1/5"(W) x 3 3/5"(D)
- Cut Out: 6 2/5"(H) x 13 4/5"(W) x 3"(D)
- Including Hardware for Easy Wall Mount Installation



PDIWCS62 Dual 6.5" 2-Way In-Wall Center Channel Speaker System

- Dual 6 1/2" Long Throw Woofer
- Video Shielded
- Center/ Left/ Right Channel
- 360 Watts Rated Peak Power
- 1" High Temperature Voice Coil
- 1" Titanium Dome Tweeter
- Electronic Crossover Network
- with Variable Boost (+7-3dB)

- Frequency Response 50Hz-22KHz
- 8 Ohm Impedance
- Vented Design for High Power and Deep Base Response
- Overall: 17.6" (W) x 8.08" (H) x 3.92" (D)
- Cut Out: 16.4" (W) x 7.04" (H) x 3.4" (D)
- Including Hardware for Easy Wall Mount Installation



PDIWS10 10" In-Wall High Power Subwoofer

- 10" In-Wall High Power Subwoofer
- 2.0" High Temperature Dual Voice Coil
- Power Handling: 180W RMS, 360W Peak
- Frequency Response: 40Hz - 3K Hz

- 8 Ohm Impedance
- Overall: 12.2"(W) x 12.2"(H) x 4.2" (D)
- Cut out: 10.8"(W) x 10.8"(H) x 3.8"(D)



PDIWS12 12" In-Wall High Power Subwoofer

- 12" In-Wall High Power Subwoofer
- 2" High Temperature Dual Voice Coil
- Power Handling: 200W RMS, 400W Peak
- Frequency Response: 30Hz - 3K Hz

- 8 Ohm Impedance
- Overall: 14.6"(W) x 14.6"(H) x 4.2" (D)
- Cut out: 13.2"(W) x 13.2"(H) x 3.8"(D)



Complete Product Catalog

PDIWS28 Dual 8" In-Wall High Power in wall Subwoofer System

- 2x8" In-Wall High Power Subwoofer
- 2.0" High Temperature Dual Voice Coil
- Power Handling: 300W RMS, 600W Peak
- Frequency Response: 60Hz-4KHz
- 8 Ohm Impedance
- Overall: 20" (W) x 10.2" (H) x 4.6" (D)
- Cut Out: 18.6" (W) x 8.8" (H) x 4.0" (D)



PDIWS8 8" In-Wall / In-Ceiling High Power Subwoofer

- 8" In-Wall High Power Subwoofer
- 2.0" High Temperature Dual Voice Coil
- Power Handling: 150W RMS, 300W Peak
- Frequency Response: 60Hz- 4 KHz
- 4-8 Ohm Impedance
- Cut-Out Dimensions: 7 7/8" W x 7 7/8" H x 3 1/2" D



PDSB10A 10-Inch 100 W Active Powered Subwoofer For Home Theater

- 100 W Active Subwoofer
- Stereo RCA Line In Input
- Stereo RCA Line Out For Receiver
- 10" Long Throw Driver
- Class AB Amplifier
- Crossover Slope Adjusted to 80 Hz
- Dimensions: 11.8" x 16.5" x 13.8"



PDSB12A 12-Inch 150 W Active Powered Subwoofer For Home Theater

- 150 W Active Subwoofer
- Stereo RCA Line In Input
- Stereo RCA Line Out For Receiver
- 12" Long Throw Driver
- Class AB Amplifier
- Crossover Slope Adjusted to 80 Hz
- Dimensions: 14.0" x 18.1" x 15.7"



PDSB15A 15-Inch 250 W Active Powered Subwoofer For Home Theater

- 250 W Active Subwoofer
- RCA Line In Input
- RCA Line Out For Receiver
- 15" Long Throw Driver
- Class H Amplifier
- Crossover Slope Adjusted to 80 Hz
- Dimensions: 19.7" X 21.2" X 19.7"



PCB3 3" 100 Watt Black Mini Cube Bookshelf Speaker In Black (Pair)

- Full Range Mini Speaker System
- Great for Home Theater Applications
- Video Shield
- 3" Paper Cone Driver
- Power Handling: 100 Watts Peak
- Frequency Response: 90 Hz- 18 KHz
- 8 Ohms Impedance
- Dimensions: 3.6" (H) x 3.6" x (W) x 4.6" (D)



Black



White

PCB4 4" 200 Watt Black Mini Cube Bookshelf Speaker In Black(Pair)

- Full Range Mini Speaker System
- Great for Home Theater Applications
- Video Shielded
- 4" Paper Cone Driver
- Power Handling: 200 Watts Peak
- Frequency Response: 80Hz - 18 KHz
- 8 Ohm Impedance
- Dimensions: 4.8"(H) x 4.8"(W) x 5.2"(D)



PDMN38 3.5" Two-Way Bass Reflex Mini-Monitor & Bookshelf/wall-mount Speakers

- Excellent for Monitor or Surround Sound Applications
- 3.5" Long Throw Woofer
- 1" High Compliance Mylar Tweeter
- 150 Watts RMS/300 Watts Peak
- Frequency Response: 60Hz-20kHz
- 8 Ohm Impedance
- Vented Design for High Power & Deep Bass Response
- Heavy Duty ABS Construction Cabinet w/Rubber Edges
- Quick Release Speaker Connections
- Spring Loaded U Mounting System
- 4.75"W x 7.25"H x 4.75"D



PDMN48 5" Two-Way Bass Reflex Mini-Monitor & Bookshelf/wall mount Speakers

- Excellent for Monitor or Surround Sound Applications
- 5" Long Throw Woofer
- 1" High Compliance Mylar Tweeter
- 200 Watts RMS/400 Watts Peak
- Frequency Response: 40Hz-22kHz
- 8 Ohm Impedance
- Vented Design for High Power & Deep Bass Response
- Heavy Duty ABS Construction Cabinet w/Rubber Edges
- Quick Release Speaker Connections
- Spring Loaded U Mounting System
- 6.25"W x 9.25"H x 5.75"D



PDMN58 6.5" Two-Way Bass Reflex Mini-Monitor System & Bookshelf/wall mount Speakers

- Excellent for Monitor or Surround Sound Applications
- 6.5" Long Throw Woofer
- 1" High Compliance Mylar Tweeter
- 300 Watts RMS/500 Watts Peak
- Frequency Response: 30Hz-22kHz
- 8 Ohm Impedance
- Vented Design for High Power & Deep Bass Response
- Heavy Duty ABS Construction Cabinet w/Rubber Edges
- Quick Release Speaker Connections
- Spring Loaded U Mounting System
- 7"W x 10 7/8"H x 6 1/3"D



PDMN68 8" Two-Way Ceiling Mount/Wall Mount/Book Shelf Speakers

- 400 Watts Peak
- 8 Ohm Impedance
- 8" Long Throw Woofer
- 1" High Compliance Tweeter
- Vented Design for High Power Deep Bass Response
- Heavy Duty ABS Construction Cabinet w/Rubber Edges
- Quick Release Speaker Connections
- Ceiling Mounting Plates (for use with Universal Mounting Brackets)
- Frequency Response: 32Hz-22kHz
- 15 3/8"W x 9 7/8"H x 8 1/2"D



PDWR30 3.5" Indoor/Outdoor Waterproof Speakers (Black)

- Excellent for Use On Boats/ Marine/ Decks/ Patios/ Poolside/ Outdoors
- Completely Water Proof
- 3.5" Aluminum Injection Cone Woofer
- 40 Oz. Magnet Structure
- 1" High Compliance Mylar Tweeter
- Capacitor Crossover Network
- Removable Rustproof Mesh Grills
- Power: 150Watts RMS/ 300Watts Peak
- Frequency Response: 60-20K Hz
- Impedance: 4 Ohms
- Dimensions: 4.75"(W)x 7.25"(H) x 4.75"(D)



Complete Product Catalog

PDWR40B 5.25" Indoor/Outdoor Waterproof Speakers (Black)

- Excellent for Use On Boats/ Marine/ Decks/ Patios/ Poolside/ Outdoors
- Completely Water Proof
- 5.25" Aluminum Injection Cone Woofer
- 40 Oz. Magnet Structure
- 1" High Compliance Myiar Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response
- Heavy Duty ASB Construction
- Quick Connect/ Disconnect Speaker Terminals
- Unique Spring Loaded Mounting System
- Removable Rustproof Mesh Grills
- Power: 200Watts RMS/ 400Watts Peak
- Frequency Response: 40-22K Hz
- Impedance: 4 Ohms
- Dimensions: 6.25"(W)x 9.25"(H) x 5.75"(D)



Black



White

PDWR50B 6.5" Indoor/Outdoor Waterproof Speakers (Black)

- Excellent for Use On Boats/ Marine/ Decks/ Patios/ Poolside/ Outdoors
- Completely Water Proof
- 6.5" Aluminum Injection Cone Woofer
- 50 Oz. Magnet Structure
- 1" High Compliance Myiar Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response
- Heavy Duty ASB Construction
- Quick Connect/ Disconnect Speaker Terminals
- Unique Spring Loaded Mounting System
- Removable Rustproof Mesh Grills
- Power: 250Watts RMS/ 500Watts Peak
- Frequency Response: 30-22K Hz
- Impedance: 4 Ohms
- Dimensions: 7.2"(W)x 11.6"(H) x 6.4"(D)



Black



White



Waterproof

PDWR33 3.5" Indoor/Outdoor Waterproof Wall Mount Speakers

PDWR53 5.25" Indoor/Outdoor Waterproof Wall Mount Speakers

PDWR63 6.5" Indoor/Outdoor Waterproof On Wall Speakers



PDWR3T 3.5" Indoor/Outdoor Waterproof Speakers w/15 Watt 70V Transformer

PDWR5T 5.25" Indoor/Outdoor Waterproof Speakers w/30 Watt 70V Transformer

PDWR6T 6.5" Indoor/Outdoor Waterproof Wall Mount Speakers w/50 Watt 70V Transformer



PDWT5 5.25" Indoor Surface Mount PA Wall Speaker w/ 70V Transformer

PDWT6 6.5" Indoor Surface Mount PA Wall Speaker w/ 70V Transformer

PDWR68 500 Watt 3 Way Black Indoor/Outdoor Waterproof Center Channel Speakers

- Dual High Impact ABS Plastic Cabinets.
- Wall-mount Indoor/Outdoor Stereo Speakers
- Three 3" Woofer With Cloth Edge.
- 1" Aluminum Voice Coil.
- 500 Watts Max Power.
- Wide Sound Field for Larger Outdoor Areas
- Frequency Response: 80--20K HZ(+ -3dB).
- Sensitivity:92dB@1W/M.
- 6 Ohms Impedance
- Dimensions: 12.25"W x 4.65"H x 5.5"D
- Sold as a pair



Black

White

PHSP101T 9.7" Indoor / Outdoor 20 Watt PA Horn Speaker w/ 70V Transformer

- Aluminum Housing
- Power/Load Rating: 20 Watts RMS
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 20 / 10 / 5
- Frequency Range: 400 Hz - 5 KHz

- SPL(@ 1W/1m): 102dB
- Mounting Bracket & Hardware Included
- Dimensions: 9.7" H x 9.7" W x 11.3" D
- Color: Grey



PHSP10TA 5.6" Indoor/Outdoor 70 Volt PA Horn Speaker

- Aluminum Housing
- Power/Load Rating: 10 Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 10 / 5 / 2.5 / 1.25
- Frequency Range: 400 Hz - 10 KHz

- SPL(@ 1W/1m): 105dB
- Mounting Bracket & Hardware Included
- Dimensions: 5.6" H x 5.6" W x 8.3" D
- Color: White



PHSP12 12.7" Indoor / Outdoor 60 Watt PA Horn Speaker w/70-100V Transformer

- Aluminum Housing
- Power/Load Rating: 60 Watts RMS
- Nominal Impedance: 16 Ohms
- 70 Volt Transformer Tapping @ 60 / 30 / 15 / 7.5
- 100 Volt Transformer Tapping @ 60 / 30 / 15

- Frequency Range: 400 Hz - 5 KHz
- SPL(@ 1W/1m): 103dB
- Mounting Bracket & Hardware Included
- Dimensions: 12.7" H x 12.7" W x 14" D
- Color: Grey



Complete Product Catalog

PHSP121T 11" Indoor / Outdoor 30 Watt PA Horn Speaker w/ 70V Transformer

- Aluminum Housing
- Power/Load Rating: 30 Watts RMS
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 30 / 15 / 7.5
- Frequency Range: 400 Hz - 5 KHz

- SPL(@ 1W/1m): 103dB
- Mounting Bracket & Hardware Included
- Dimensions: 11" H x 11" W x 13.1" D
- Color: Grey



PHSP131T 13.5" Indoor / Outdoor 50 Watt PA Horn Speaker w/ 70V Transformer

- Aluminum Housing
- Power/Load Rating: 50 Watts RMS
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 50 / 25 / 12.5
- Frequency Range: 400 Hz - 5 KHz

- SPL(@ 1W/1m): 105dB
- Mounting Bracket & Hardware Included
- Dimensions: 13.5" H x 13.5" W x 14.3" D
- Color: Grey



PHSP16 16" Indoor / Outdoor 80 Watt PA Horn Speaker w/ 70-100V Transformer

- Aluminum Housing
- Power/Load Rating: 80 Watts RMS
- Nominal Impedance: 16 Ohms
- 70 Volt Transformer Tapping @ 80 / 40 / 30 / 10
- 100 Volt Transformer Tapping @ 80 / 40 / 20

- Frequency Range: 400 Hz - 5 KHz
- SPL(@ 1W/1m): 105dB
- Mounting Bracket & Hardware Included
- Dimensions: 16" H x 16" W x 16.5" D
- Color: Grey



PHSP20 19.5" Indoor / Outdoor 100 Watt PA Horn Speaker w/ 70V Transformer

- Aluminum Housing
- Power/Load Rating: 100 Watts RMS
- Nominal Impedance: 16 Ohms
- 70 Volt Transformer Tapping @ 100 / 50 / 25 / 12.5
- 100 Volt Transformer Tapping @ 100 / 50 / 25

- Frequency Range: 400 Hz - 5 KHz
- SPL(@ 1W/1m): 105dB
- Mounting Bracket & Hardware Included
- Dimensions: 19.5" H x 19.5" W x 19" D
- Color: Grey



PHSP30TA 9.4" Indoor/Outdoor 70 Volt PA Horn Speaker

- Aluminum Housing
- Power/Load Rating: 30 Watts
- Nominal Impedance: 8 Ohms
- 70 Volt Transformer Tapping @ 30 / 15 / 7.5 / 3.5
- Frequency Range: 400 Hz - 10 KHz

- SPL(@ 1W/1m): 108dB
- Mounting Bracket & Hardware Included
- Dimensions: 9.4" H x 9.4" W x 12" D
- Color: White



PHSP4 6" Indoor / Outdoor 50 Watts PA Horn Speaker

- Power/Load Rating: 50 Watts
- Nominal Impedance: 8 Ohms
- Frequency Range: 500 Hz - 5 KHz
- SPL(@ 1W/1m): 100dB

- Mounting Bracket & Hardware Included
- Dimensions: 6" H x 4" W x 8" D



PHSP5 8" Indoor / Outdoor 65 Watt PA Horn Speaker



PHSP6K 6.3" Indoor / Outdoor 25 Watt PA Horn Speaker

PHSP8K 8.1" Indoor / Outdoor 50 Watt PA Horn Speaker



PLWFT1 6.5" 2-Way Waterproof Fountain Rock Garden Speaker

- Unique Shape made of Fiberglass Strengthened Plastic w/ Rock-like Textured Finish
- Water-proof Pump and Light (4pcs) Included
- 13mm Polyether Imide Dome Tweeter, Neodymium Magnet
- 6.5" PP Carbon Cone Woofer
- Built-In Transformer: Input: 50W/70V, Output: 50W/25W, 8 ohm

- Power Handling RMS: 50 Watts
- Power Handling Peak: 100 Watts
- Frequency Response: 70~20kHZ
- Switch for 70V or 8 ohm
- Sensitivity: 88.5 dB
- Dimensions: 37.01"L x 37.01"W x 31.50"H



PLWFT2 5.25" 2-Way Waterproof Fountain Rock Garden Speaker

- Unique Shape made of Fiberglass Strengthened Plastic w/ Rock-like Textured Finish
- Water-proof Pump and Light (3pcs) Included
- 13mm Polyether Imide Dome Tweeter, Neodymium Magnet
- 5.25" PP Carbon Cone Woofer
- Built-In Transformer: Input: 50W/70V, Output: 50W/25W, 8 ohm

- Power Handling RMS: 40 Watts
- Power Handling Peak: 80 Watts
- Frequency Response: 90~20kHZ
- Switch for 70V or 8 ohm
- Sensitivity: 88.5 dB
- Dimensions: 25.98"L x 15.75"W x 36.22"H



PLWFT3 6.5" 2-Way Waterproof Fountain Rock Garden Speaker

- Unique Shape made of Fiberglass Strengthened Plastic w/ Rock-like Textured Finish
- Water-proof Pump and Light (3pcs) Included
- 13mm Polyether Imide Dome Tweeter, Neodymium Magnet
- 6.5" PP Carbon Cone Woofer
- Built-In Transformer: Input: 50W/70V, Output: 50W/25W, 8 ohm

- Power Handling RMS: 50 Watts
- Power Handling Peak: 100 Watts
- Frequency Response: 70~20kHZ
- Switch for 70V or 8 ohm
- Sensitivity: 88.5 dB
- Dimensions: 29.13"L x 23.62"W x 32.68"H



PVG1 Wall Mount Rotary Volume Control Knob

- Control room volume with ease
- 12-position light-touch knob
- Works with all audio and video systems
- Perfect companion for the HiFi Four-Pair speaker selector

- Attractive standard and Decora-style wall plates included
- Includes mounting ring and wire nuts for installation
- 100W Load Handling
- Depth 2.5"



PVG2 Wall Mount Impedance Matching Vertical Sliding Volume Control

- Control room volume with ease from any room
- Mounts in-wall
- Works with all audio and video systems
- Attractive standard and Decora-style wall plates included
- 12 soft-touch volume positions for smooth, simple operation
- Removable terminal blocks accept up to 14-gauge wire

- Switchable impedance matching lets you connect up to 16 pairs of 8-ohm speakers to one amplifier
- Includes mounting ring and wire nuts for installation
- 100W load handling



PVG3 High Power Mono Volume Control With Built In Relay Circuit

- 5-Position, Light-Touch Knob
- Perfect Companion For Hi-fi
- Four-Pair Speakers
- 2/3 and 4 wire mode
- Build in relay circuit for (emergency message from same amplifier)
- Attractive Standard And Decora- Style

- Wall Plates
- Includes Mounting Ring And Wire Nuts for Installation
- 100 Watts Load Handling
- Dimensions: 4.7" X 2.8" X 1.9"



Complete Product Catalog

PVCD15 In-Wall Two Speaker Dual Knob Independent Volume Control

- Control Total of 2 Speakers
- 120 watts Load Handling Power
- Independently control two separate channels (A and B)
- Smooth rotary faders for clean sound adjustment
- Attractive standard and Decora-style wall plate included



PVCS2 In-Wall A/B Source Selector Switch

- Three possible configurations: select A, B, or both A and B
- Works with all audio and video systems
- Easy push-button operation
- Decora-style wallplate
- 120W Load Handling Power



PVCS5 In-Wall A/B Speaker/Source Switch

- Mounts into any standard Low Voltage gang outlet box
- Switch between two separate sources
- Attractive standard and Decora-style wall plate included
- Output to two sets of stereo speakers (one or both)
- Can be used in conjunction with either standard or impedance matching volume controls
- Can handle up to 150 watts of power
- Screw type terminals accept up to 14 gauge wires



PVC8U In-Wall Background Music Amplifier with USB And SD Card Player With 3.5mm Input Jack For iPod/iPohne & Volume Control



PHSTD1 Adjustable Height Home Theater Speaker Stands



PDT35 Electrical Tester For Voltage and Continuity

PHCT45 Network Cable Tester

PHCT55

Telephone Wire Cable Tester For Testing Continuity With Sender And Receiver

PHCT65

LAN/Ethernet/Telephone Cable Tracker & Tester



PHCT85

HDMI High Definition Cable Tester





PSPL01
Mini Digital Sound Level Meter



PSPL05R
Digital Sound Level Meter With recording Function



PSPL03
Mini Sound Level Meter with A Frequency Weighting



PSPL25
Sound Level Meter with A and C Frequency Weighting



PSPL03 4 in 1 Multifunction Environment Meter with Sound Level Meter, Light Meter, Humidity, and Temperature



PTHM15 Mini Temperature and Humidity Meter With Dew Point and Wet Bulb Temperature



PTHM20 Mini Temperature and Humidity Meter With Dew Point and Wet Bulb Temperature



PCMM05 Carbon Monoxide Meter



PCMM01 Digital Manometer with 11 Units of Measure



PDM15 Digital Manometer For Measuring Pressure



PMA82 Digital Anemometer & Thermometer For Measuring Wind Speed



PMA90 Digital Anemometer / Thermometer - Air Velocity, Air Flow, Temperature



PMD74 Microwave Leakage Detector



PIRT25 Compact Infrared Thermometer With Laser Targeting



PIRT30 High Temperature Infrared Thermometer with Type K Input



PMIR15 Mini Infrared Thermometer with Laser Pointer



PHHT15 Indoor Digital Hygro-Thermometer



PDMT05 IPocket Size 3 in 1 Digital Multimeter With Voltage and Resistance



PDT35 Electrical Tester For Voltage and Continuity



PCMT20 Electrical Tester For Voltage and Continuity



PCTL01 Electrical Tester For Voltage and Continuity

Find us on social media:



youtube.com/pyleaudio1



facebook.com/pyleaudio



[@pyleaudio](https://twitter.com/pyleaudio)



PIPDK78

1600 63RD • BROOKLYN, N.Y. • 11204 • 718 535-1800 • FAX: 718 236-2400

