



PYLE[®] audio.com

2014
CAR





Pyle Car

Mobile Video Receivers.....	2
Headunits / Receivers	6
Roof Mount Monitors.....	10
Headrest Monitors	14
Video Monitors	16
Wireless Headphones	20
Backup Cameras.....	21
Security Systems.....	28
Power Inverters	29
Power Converter / Step Downs.....	30
Cigarette Lighter Accessories.....	31
Ground Loop Isolators /iPod-MP3 Audio Interfaces.....	33
FM Modulators / Transmitters.....	36
Equalizers.....	38
Amplifiers	39
Subwoofers	43
Subwoofer Enclosures	46
Speakers	50
Tweeters.....	57
Wiring.....	58
Capacitors	59
HID Driving Light Kits.....	60



PLDNV105B 10.1" Motorized TFT/LCD Touch Screen Detachable Display Multimedia Receiver w/Bluetooth/AUX-In iPod Cable/GPS w/USA/Canada/Mexico Maps

- Touch Screen Control Operation
- Built-In GPS Navigation System
- Text to Speech & Turn by Turn Voice Prompts
- Allows to Keep your Eyes on the road While Navigating with Convenient Voice Guidance
- 4G SD Card w/USA/Canada/Mexico Maps
- Motorized & Detachable Touch Screen Panel
- Bluetooth Wireless Streaming Technology
- Works with iPhone, Droid, Blackberry, iPads, Etc.
- Android, Blackberry, iPads, Tablets, Etc)
- Am/FM-MPX 2 Band Radio
- 30 Station Memory (18FM/12am)
- 10.1 Inch (16:9) TFT Detachable Color Monitor

- Resolution: 1024 x 600 Pixels
- DVD/VCD/MPEG4/MP3/DIVX/CD/CD-RW Compatible
- On Screen Display Title, Time, Cheaper, Subtitle & Angle
- A/V input & A/V Output
- SD/MMC Card Slot
- Direct Connection of Alternate Audio/Video Aux Line Output Jack (MP3.iPod)
- Wireless Remote Control
- Rear Camera Output
- 320 Watts (4 x 80W)
- Detachable Panel Carry Case



PLDNV77U 7" Bluetooth LCD Digital Touch Screen Receiver with GPS Maps, USB/SD Memory Card Readers, AUX/MP3 Input, Double DIN with Remote

- Touch Screen Control Operations
- Bluetooth Wireless Streaming Technology
- Works with iPhone, Droid, Blackberry, iPads, Etc.
- Bluetooth Functions: Auto Muting & Hands Free Talking Capability
- Voice Guidance Helps You Keep Eyes on the Road
- 4G SD Card with USA/Canada/Mexico Maps
- Text to Speech & Turn by Turn Voice Prompts
- TFT LCD Display
- Selectable USA/Europe Radio Frequency
- 30 Station Memory (18 FM/12 AM)
- PAL/NTSC Color System
- LD/DX & ST/MD Selector
- Full Function Wireless Remote Control

- Rear Camera Output, Parking Video Input
- File Compatibility: MP4, JPEG, MP3, WMA and More
- Last Position Memory
- iPod Connection Cable Included
- Repeat/Intro/Random/Clock Function/Mute Control
- 4 Channel RCA Preamp Output/Subwoofer Output
- Picture Control: Brightness/Contrast/Hue/Chrome
- Treble/Bass/Balance/Fader/Volume/Control
- PLL Synthesizer Tuner - Auto Store/Preset Scan
- AM/FM-MPX 2 Band Radio - Preset EQ
- Selectable View Angle
- A/V Input & A/V Output
- 320 Watts (4 x 80W)
- Unit Dimensions: 7.24" D x 7.01" W x 3.94" H



PLDNV695 6.95" Double-DIN Touchscreen Video DVD/MP4/MP3/CD Player With Hands-Free Bluetooth, GPS w/USA/Canada/Mexico Maps, USB/SD, Aux-In

- Touch Screen Operation
- Built-in Bluetooth
- 4G SD card w/USA/Canada/Mexico maps
- Text to speech & turn by turn voice prompts
- Keep your eyes on the road while navigating with convenient voice guidance
- Repeat/program/random/intro play
- Treble/bass/balance/fader/volume control
- AM/FM stereo receiver/Electronic anti-shock
- Aux rear input/Auto memory store/preset scan
- Support DVD/VCD/CD/CD-R/CD-RW/MP3

- Parking video output
- 30 preset stations memory
- 320 watts total output(4x80 watts)
- 4 channel RCA preamp output/subwoofer output
- Card-sized full function remote control
- Direct iPod/iPhone Connection Cable (compatible with 30-pin dock connector only)
- Picture Control: Brightness/contrast/hue/chrome/USB/SD/MMC card reader MP4-JPEG/MP3 WMA playback
- Dimensions: 7.24"D x 7.01"W x 3.94"H



PLDNV781 7" Double DIN In-Dash Touch Screen TFT/LCD Monitor w/ DVD/CD/MP3/MP4/USB/SD/AMFM/RDS/Bluetooth & Screen Dial Pad Built-In GPS/TTS w/ USA/Canada & Mexico Maps

- 7" 16:9 Wide Screen TFT LCD Display
- Touch Screen Operation
- V
- 2G SD Card w/ USA/Canada/Mexico Maps
- Text to speech & Turn by Turn Voice Prompts
- Keep your Eyes on the Road While Navigating w/ Convenient Guidance
- Picture Control: Brightness/Contrast/Hue/Chrome
- USB/SD-MMC Card Reader MP4-JPEG/MP3 WMA Playback
- Repeat/Program/Random/Intro Play
- Treble/Bass/Balance/Fader/Volume Control
- AM/FM Stereo Receiver
- Electronic Anti-Shock

- AUX Rear Input
- Auto Memory Store/Preset Scan
- Support DVD/VCD/CD/CD-R/CD-RW/MP3
- Parking Video Output
- 30 Preset Stations Memory
- 320 Watts Total Output (4 x 80 Watts)
- Bluetooth Function Auto Muting Feature, Hands Free Talking Capabilities
- 4 Channel RCA Preamp Output/Subwoofer Output
- Direct iPod/iPhone Connection Cable (compatible with 30-pin dock connector only)
- Unit Dimensions: 7.24" (D) x 7.01" (W) x 3.94" (D)



PLBT72G

7" Double DIN In-Dash Touch Screen TFT/LCD Monitor w/ DVD/CD/MP3/MP4/USB/SD/AMFM/RDS/Bluetooth & Screen Dial Pad Built-In GPS/TTS w/ USA/Canada & Mexico Maps

- In Dash 7" 16:9 High Definition Wide TFT LCD
- Touch Screen Control Operation
- Bluetooth Compatible A2DP & AVRCP Support
- Built-In GPS Navigation System
- Text to Speech & Turn by Turn Voice Prompts
- SD Card with USA/Canada/Mexico Maps
- Digital Video Player/VCD/MPGE4/MP3/CD/CD-R/CD-RW Compatible
- AM/FM-MPX 2 Band Radio - Auto Store/Prescan
- PLL Synthesizer Tuner - 30 Station Memory
- Full Motorized Screen Telescopes out and Up Including Front to Back Angling
- Detachable Front Panel - LCD Digital Display
- On Screen Display Title, Time, Chapter, Subtitle
- Treble, Bass, Balance, Fader, Encoder, Volume
- PAL/NTSC Color System - Brightness: 400 NITS

- Resolution: 1440 x 234 Pixels
- Last Position Memory
- ESP (Electronic Shock Protection)
- Anti-shock Mechanism
- LO/DX & ST/MO Selector
- Direct Connection of Alternate Audio/ Video Source Through AUX Line Input Jack (MP3/Digital Video Player/CD)
- Mute - Clock Function - Preset EQ
- RCA Line Out
- Subwoofer & Parking Video Input
- Includes Remote Control
- AUX Input & Rear Camera Input
- ISO Connector - RDS-EOn - USB Compatible
- 3 Colors Illumination
- Dimensions: 7.01"W x 1.98"H x 6.54"D



PLTS78DUB

7" Single DIN In-Dash Detachable Motorized Touch Screen TFT/LCD Monitor w/ DVD/CD/MP3/MP4/USB/SD/AM-FM Bluetooth Receiver

- Touch Screen Control Operation
- Bluetooth Wireless Streaming Technology
- Works with iPhone, Droid, Blackberry, iPads, Etc.
- Bluetooth A2dp & Avrcp Support (Password: 8888)
- PLL Synthesizer Tuner - 30 Station Memory
- Auto Store/Prescan
- DVD/VCD/MPGE4/MP3/CD-RW Compatible
- Am/Fm-MPX 2 Band Radio
- Full Motorized Screen Telescopes Out And Up
- LCD Digital Display
- On Screen Display Title, Time, Chapter, Subtitle
- Treble/Bass/Balance/Fader/Encoder Volume
- Pal/NTSC Color System - Brightness: 400 Nits
- Resolution: 1440x234 Pixels

- ESP (Electronic Shock Protection)
- Anti-Shock Mechanism - Last Position Memory
- Lo/Dx & St/Mo Selector
- Direct Connection Of Alternate
- Audio/Video Source Through Aux Line
- Input Jack(Mp3/Dvd/Cd) & Sub-Woofers Input
- Repeat/Intro/Random
- Clock - Mute - Preset EQ
- A/V Input & A/V Output - RCA Line Out
- Remote Control - SD/USB Memory Card Slots
- Rear Camera Input - Parking Video Input
- USB & ISO Connectors
- Dimensions: 7.01"W x 1.98"H x 6.54"D
- USA/Europe Frequency Switch



PLTS76DU

7" Touch Screen Motorized Detachable TFT/LCD Monitor With DVD/CD/MP3/AM/FM Receiver

- DVD/VCD/MPGE4/MP3/CD-RW Compatible
- AM/FM-MPX 2 Band Radio
- PLL Synthesizer Tuner
- Auto Store/Prescan
- 30 Station Memory
- Touch Screen Control Operation
- Motorized Screen Telescopes Out And Up
- LCD Digital Display
- On Screen Display Title, Time, Chapter, Subtitle
- Treble/Bass/Balance/Fader/Encoder Volume
- PAL/NTSC Color System
- Resolution: 1440x234 Pixels
- Brightness: 400 Nits
- Last Position Memory
- ESP (Electronic Shock Protection)
- Anti-Shock Mechanism
- LO/DX & ST/MO Selector
- Direct Connection Of Alternate

- Audio/Video Source Through Aux Line
- Input Jack(Mp3/Dvd/Cd)
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA Line Out
- Preset EQ
- Sub-Woofers
- A/V Input & A/V Output
- Remote Control
- Rear Camera Input
- Parking Video Input
- USB Connector
- Iso Connector
- SD/MMC Card Slot
- 320 Watts Total Outputs (4 x 80 Watts)
- USA/Europe Frequency Switch
- Dimensions: 7.01W X 1.98H X 6.54D



PLTS73FX

7" Single DIN In-Dash Motorized Touch Screen TFT/LCD Monitor w/ DVD/CD/MP3/MP4/USB/SD/AM-FM Player

- AM/FM-MPX 2 Band Radio
- PLL Synthesizer Tuner
- Auto Store/Prescan
- 30 Station Memory
- Touch Screen Control Operation
- Full Motorized Screen Telescopes Out And Up
- LCD Digital Display
- On Screen Display Title, Time, Chapter, Subtitle
- Treble/Bass/Balance/Fader/Encoder Volume
- Pal/NTSC Color System
- Resolution: 1440x234 Pixels
- Brightness: 400 Nits
- Last Position Memory
- ESP (Electronic Shock Protection)
- Anti-Shock Mechanism
- LO/DX & ST/MO Selector
- Direct Connection Of Alternate
- Audio/Video Source Through Aux line

- Input Jack(Mp3/Dvd/Cd)
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA line Out
- Preset EQ
- Sub-Woofers
- A/V Input & A/V Output
- Remote Control
- Rear Camera Input
- Parking Video Input
- Usb Connector
- Iso Connector
- Sd/Mmc Card Slot
- Dimensions: 7.01W x 1.98H x 6.54D
- USA/Europe Frequency Switch
- Feather Touch Sensor Controls





PLD11BT 10.1" Motorized TFT/LCD Touch Screen Detachable Display Multimedia Receiver w/ Bluetooth & AUX-In iPod Cable

- Touch Screen Control Operation
- Motorized & Full Detachable Front Panel
- 10.1 Inch (16:9) TFT Detachable Color Monitor
- Bluetooth Wireless Streaming Technology
- Works with iPhone, Droid, Blackberry, iPads, Etc.
- Treble/Bass/Balance/Fader/Encoder
- Auto Store/Presets Scan
- AM/FM-MPX 2 Band Radio
- 30 Station Memory (18FM/12AM)
- DVD/VCD/MPEG4/MP3/DIVX/CD/CD-RW Compatible
- Resolution: 1024 x 600 Pixels
- On Screen Display Title, Time, Cheaper, Subtitle
- A/V Input & A/V Output
- SD Memory Card Slot
- Direct Connection Of Alternate Audio/Video Aux Line Output Jack (MP3.iPod)
- Wireless Remote Control
- Rear Camera Output
- 320 Watts (4 x 80W)
- Detachable Panel Carry Case



PLD10BT 10.1" Motorized TFT/LCD Touch Screen Detachable Display DVD/VCD/CD/MP3/CD-R/USB/AM/FM/RDS Receiver w/ Bluetooth System and AUX A/V Input For iPod/Smart Phones/MP3 Players

- DVD/VCD/MPEG4/MP3/DIVX/CD/CD-RW Compatible
- Motorized & Detachable 10.1" Touch Screen Panel
- Bluetooth Wireless Streaming Technology
- Works with iPhone, Droid, Blackberry, iPads, Etc.
- Treble/Bass/Balance/Fader/Encoder
- Volume PLL Synthesizer Tuner
- Auto Store/Presets Scan
- AM/FM-MPX 2 Band Radio
- 30 Station Memory (18FM/12AM)
- 10.1 Inch (16:9) Tft Detachable Color Monitor
- Touch Screen Control Operation
- Resolution: 1024 x 600 Pixels
- Brightness: 400 nits
- On Screen Display Title, Time, Chapter, Subtitle
- Dolby Digital Coaxial Outputs
- PAL/NTSC Color System
- Anti-Shock Mechanism
- ESP Function
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Clock Function - Mute Control
- RCA Line Out - Preset EQ
- Subwoofer Output
- Selectable View Angle
- A/V Input & A/V Output
- SD/MMC Card Slot
- Direct Connection Of Alternate Audio/Video Aux Line Input Jack (MP3/Ipod)
- Wireless Remote Control
- Rear Camera Output - Parking Video Input
- RDS-EON - USB Connector
- Bluetooth A2DP & AVRCP Support
- 3 Color Illumination
- 320 Watts (4 X 80w)
- Last Position Memory
- USA/Europe Frequency Switch
- Detachable Panel Carry Case
- In-Dash Dimensions: 7.24"W X 2.13"H X 6.69"D
- TFT Panel Dimensions: 10"W X 6.22"H X 0.91"D



PLD71MU 7" TFT Touch Screen DVD/CD/MP3/CD-R/USB/AM/FM/RDS Receiver

- DVD/MPEG4/MP3/CD/CD-R/CD-RW Compatible
- Motorized Slide Down Detachable Front Panel
- Treble/Bass/Balance/Fader/Encoder Volume
- PLL Synthesizer Tuner
- Auto Store/Presets Scan
- AM/FM-MPX 2 Band Radio
- 30 Station Memory (18FM/12AM)
- Built In 7 Inch (16:9) TFT Color Monitor
- Touch Screen Control Operation
- Resolution: 1440 x 234 Pixels
- Brightness: 400 nits
- On Screen Title, Time, Chapter, Subtitle, Angle
- Dolby Digital Coaxial Outputs PAL/NTSC System Color
- ESP Function Anti-Shock Mechanism
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA Line Out
- Preset EQ
- Subwoofer Output
- Selectable View Angle
- A/V Input & A/V Output
- SD/MMC Card Slot / USB Input Jack
- Direct Connection Of Alternate Audio/Video Aux Line Input Jack (MP3/Ipod)
- Remote Control
- Rear Camera Output
- Parking Video Input
- RDS-EON
- 11 Kinds Of Background Color
- 320 Watts (4 X 80w)
- Last Position Memory
- Usa/Europe Frequency Switch
- Dimensions: 7.24W X 2.13H X 6.69D



PLD70BT 7" TFT Touch Screen DVD/VCD/CD/MP3/CD-R/USB/AM/FM/RDS Receiver & Bluetooth System

- Built In 7 Inch (16:9) TFT LCD Color Monitor
- Touch Screen Control Operation
- Motorized Slide Down Detachable Front Panel
- Bluetooth Wireless Streaming Technology
- Works with iPhone, Droid, Blackberry, iPads, Etc.
- Treble/Bass/Balance/Fader/Encoder
- Volume PLL Synthesizer Tuner - Auto Store/Presets Memory (18FM/12AM)
- DVD/MPEG4/MP3/CD/CD-R/CD-RW Compatible
- Resolution: 1440x234 Pixels
- Brightness: 400nits
- On Screen Display Title, Time, Chapter, etc.
- Dolby Digital Coaxial Outputs
- PAL/NTSC Color System
- Anti-Shock Mechanism
- ESP Function
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Clock - Mute Control - Preset EQ
- RCA Line Out - A/V Input & A/V Output
- Subwoofer Output - Rear Camera Output
- Parking Video Input
- Selectable Viewing Angle
- SD Memory Card Slot - USB Connector
- Direct Connection Of Alternate Audio/Video Aux Line Input Jack (MP3/Ipod)
- Remote Control - RDS-EON
- 11 Background Colors
- 320 Watts (4 X 80w)
- Last Position Memory
- Bluetooth A2DP & AVRCP Support
- USA/Europe Frequency Switch
- Dimensions: 7.24"W X 2.13"H X 6.69"D



PLDN66I 6.5" Double DIN In-Dash Touch Screen TFT/LCD Monitor w/DVD/CD/MP3/MP4/CD-R/USB/SD-MMC Card Slot AM/FM

- 6.5" 16:9 Wide Screen TFT LCD Display
- Touch Screen Control Operation
- Picture Control: Brightness/Contrast/Hue/Chrome
- USB Flash/SD Card Readers
- AM/FM Stereo Receiver
- Electronic Anti-Shock
- AUX Rear and A/V Input - Parking Video Output
- Auto Memory Store/Prescan
- Support DVD/VCD/CD/CD-R/CD-RW/MP3

- 30 Preset Stations Memory
- MP4, JPEG, MP3, WMA File Format Playback
- Treble/Bass/Balance/Fader/Volume Controls
- Repeat/Program/Random/Intro Play Controls
- 4-Channel RCA Preamp Out plus Subwoofer Output
- Full Function Remote Control - 30-Pin iPod Connection Cable
- 320 Watts Total Output (4 x 80 Watts)



PLDN73I 7" Double DIN TFT Touch Screen DVD/VCD/CD/MP3/MP4/CD-R/USB/SD-MMC Card Slot/AM/FM/iPod Connector

- DVD/VCD/MPEG4/MP3/CD/CD-RW Compatible
- Motorized Slide Down Front Panel
- Treble/Bass/Balance/Fader/Encoder Volume
- PLL Synthesizer Tuner
- Auto Store/Prescan
- AM/FM-MPX 2 Band Radio
- 30 Station Memory (18FM/12AM)
- Built-In 7" (16:9) TFT Color Monitor
- Touch Screen Control Operation
- Resolution: 1440 x 234 Pixels: Brightness: 200 cd/m2
- On screen Display: Title, Time, Chapter, Subtitle
- Double-DIN Chassis
- PAL/NTSC Color System
- Anti-Shock Mechanism-ESP Function
- LO/DX & ST/MO Selector

- Repeat/Intro/Random
- Clock Function, Mute Control
- RCA Line Out, Preset EQ
- Subwoofer Output
- Selectable Viewing Angle
- A/V Input & A/V Output
- SD/MMC Card, USB Connector
- Direct iPod/iPhone Connection Cable
- Wireless Remote Control
- Rear Camera Output, Parking Video Input
- Last Position Memory
- 320 Watts (4 x 80W)
- Selectable USA/Europe Radio Frequency
- Dimensions: 7.26"H x 4.08"W x 6.36"D



PLDN74BTI 7" Double DIN TFT Touch Screen DVD/VCD/CD/MP3/MP4/CD-R/USB/SD-MMC Card Slot/AM/FM/iPod Connector & Bluetooth

- DVD/VCD/MPEG4/MP3/CD/CD-RW Compatible
- Motorized Slide Down Front Panel
- Bluetooth Wireless Streaming Technology
- Works with iPhone, Droid, Blackberry, iPads, Etc.
- Treble/Bass/Balance/Fader/Encoder Volume
- PLL Synthesizer Tuner
- Bluetooth A2DP Support
- Auto Store/Prescan
- AM/FM-MPX 2 Band Radio
- 30 Station Memory (18FM/12AM)
- Built-In 7" (16:9) TFT Color Monitor
- Touch Screen Control Operation
- Resolution: 1440 x 234 Pixels: Brightness: 200 cd/m2
- On screen Display: Title, Time, Chapter, Subtitle
- Double-DIN Chassis
- PAL/NTSC Color System

- Anti-Shock Mechanism-ESP Function
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Clock Function, Mute Control
- RCA Line Out, Preset EQ
- Subwoofer Output
- Selectable View Angle
- A/V Input & A/V Output
- SD/MMC Card, USB Connector
- Direct iPod/iPhone Connection Cable
- Wireless Remote Control
- Rear Camera Output, Parking Video Input
- 320 Watts (4 x 80W)
- Last Position Memory
- Selectable USA/Europe Radio Frequency
- Dimensions: 7.26 W x 4.08 H x 6.36 D



PLD40MU 4.3" Touch Screen TFT/LCD Monitor w/ Digital Video Player/CD/MP3/USB/SD/AM/FM/RDS Player

- Built In 4.3 Inch Wide TFT Color Monitor
- Touch Screen Control Operation
- Digital Video Player/VCD/MPGE4/MP3/CD/CD-R/CD-RW Compatible
- AM/FM-MPX 2 Band Radio - PLL Synthesizer Tuner
- Auto Store/Prescan - 30 Station Memory
- Flip Down Detachable Front Panel
- On Screen Display Title, Time, Chapter, Subtitle
- Treble/Bass/Balance/Fader/Encoder Volume
- PAL/NTSC Color System
- Last Position Memory
- ESP (Electronic Shock Protection)

- Anti-Shock Mechanism
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Direct Connection Of Alternate
- AUDIO/VIDEO Source Through AUX Line
- Input Jack(MP3/Digital Video Player/CD)
- Clock - Mute Control - Preset EQ
- RCA Line Out - Subwoofer Input
- A/V Input & A/V Output
- Remote Control - RDS-EON
- Rear Camera Input - Parking Video Input
- SD Memory Card Slot



PL3MP4 3" TFT/LCD Monitor MP3/MP4/SD/USB Player & AM/FM Receiver

- 3" Inch 16:9 Wide Screen TFT/LCD Display
- Full Detachable Front Panel
- Res. 400 x 240 Pixels/ Brightness: 400nits
- Treble/Bass/Balance/Fader/Encoder Volume Control
- USB/SD-MMC Card Reader MP4-JPEG/MP3 WMA-Playback
- Repeat Play
- AM/FM-MPX Stereo Radio
- Clock Function
- ESP Function Anti-Vibration/Shock Protection

- Auto Memory Store/Prescan
- Parking Video Output
- DSP Equalizer Control-Rock-Classic-Pop
- 30 Preset Stations Memory (18FM/12AM)
- 2 Channel RCA Preamp Output
- Front Video/AUX Input (Ipod/MP3)
- Subwoofer Output
- Full Function Wireless Remote Control
- 240 Watts Total Output (4 X 60 Watts)
- Dimensions 7.09"W 1.97"H 6.14"D





PLRDD19UB Bluetooth Digital Receiver with USB/SD Card Readers, AM/FM Radio, AUX Input, Remote Control

- Built-in Bluetooth
- Wireless Audio Streaming
- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD Memory Card Readers
- MP3/WMA Music File Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM

- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Includes Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- Bluetooth Function
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- 4 x 60 Watts Maximum Power Output
- Dimensions: 7" (W) x 4.5" (D) x 3.92" (H)



PLRRR18U Digital Receiver with USB/SD Memory Card Readers, AM/FM Radio, AUX Input, Remote Control

- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD Memory Card Readers
- MP3/WMA Music File Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM
- Front Auxiliary Input Jack

- Stereo RCA Line Out Jack
- Includes Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- 4 x 60 Watts Maximum Power Output
- Dimensions: 7" (W) x 4.5" (D) x 3.92" (H)



PLTR24U In-Dash AM/FM MPX Auto/Truck/Bus/RV Receiver w/MP3 Playback & USB/SD/Aux Input

- AM/FM MPX PLL Tuning Auto/Truck/Bus/RV Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB & SD/MMC Card Port Direct MP3/WMA Digital Music File Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18 FM & 12 AM
- Front Auxiliary 3.5mm / 1/8" Audio Line Input

- Stereo RCA 2 Channel RCA Line Output
- Full Function Wireless Remote Control
- Blue Illuminated Control Buttons
- Seek & Scan Radio Functions
- 240 Watts Max Output(4 x 60 Watts)
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- DC 12V-24V Dual Voltage Compatible
- Dimensions: 7" (W) x 4.72" (D) x 1.96" (H)



PLTR25UB In-Dash AM/FM MPX Auto/Truck/Bus/RV Bluetooth Receiver w/MP3 Playback & USB/SD/Aux Input

- AM/FM MPX PLL Tuning Auto/Truck/Bus/RV Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB & SD/MMC Card Port Direct MP3/WMA Digital Music File Playback
- Bluetooth A2DP Wireless Connectivity
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18 FM & 12 AM
- Front Auxiliary 3.5mm / 1/8" Audio Line Input

- Stereo RCA 2 Channel RCA Line Output
- Full Function Wireless Remote Control
- Blue Illuminated Control Buttons
- Seek & Scan Radio Functions
- 240 Watts Max Output(4 x 60 Watts)
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- DC 12V-24V Dual Voltage Compatible
- Dimensions: 7" (W) x 4.72" (D) x 1.96" (H)



PLR31MP AM/FM-MPX In-Dash Detachable Face Radio w/SD/MMC/USB Player

- AM/FM-MPX PLL Tuning Car Radio
- Red LCD Display MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD/MMC Card Port For MP3/WMA Music File Playback
- Detachable face Panel
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory: 18FM-12AM

- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Full Function Remote Control
- Red Button Illumination Controls
- Seek/Scan Function
- AM Frequency Ranges: 530-1710 KHz
- FM Frequency Range: 87.5-107.9 MHz
- 4 X 40 Watts Maximum Power Output



PLR32MPB In-Dash AM/FM-MPX Radio with SD/USB/MP3 Playback, 3.5mm Aux-In, Bluetooth Wireless Streaming

NEW

- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD/MMC Card Port for MP3/WMA Music File Playback
- Encoding Volume/Balance/Bass/Treble & Fader Control
- Front Auxiliary Input Jack - Connect Virtually Any Digital Music Player
- Stream Music From Your Bluetooth Device (iPhone/Android/BlackBerry etc.)

- 30 Radio Preset Station Memory 18FM -12AM
- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530~1710KHz
- FM Frequency Range: 87.5~107.9MHz
- 4 X 60 watt Maximum Power Output
- Dimensions: 7" (W) x 4.72" (D) x 1.96" (H)



PLCD41MU In-Dash Receiver w/ MP3 Playback, AM/FM-MPX Radio, CD Player & USB/SD/AUX Inputs

NEW

- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot and SD/MMC Card Port for MP3/WMA Music Files Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM
- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack

- Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530-1710 Khz
- FM Frequency Range: 87.5-107.9 Mhz
- RDS-EON
- ISO Connector
- 4 x 60 Watts Maximum Power Output
- Dimensions: 7.5 W x 7.2D x 2.2H



PLCD51BT In-Dash Bluetooth Receiver with USB/SD Memory Slots, AUX Input for MP3 Playback & AM/FM Radio

NEW

- Bluetooth Compatible A2DP and AVRCP Support
- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot and SD/MMC Card Port for MP3/WMA Music Files Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM
- Front Auxiliary Input Jack

- Stereo RCA Line Out Jack
- Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530-1710 Khz
- FM Frequency Range: 87.5-107.9 Mhz
- RDS-EON
- ISO Connector
- 4 x 60 Watts Maximum Power Output
- Dimensions: 7.5 W x 7.2D x 2.2H



PLR38T AM/FM/MP3/WMA Detachable Face Player W/ USB/SD Reader & Ipod Interface

- AM/FM 2-Band Radio (USA)
- Semi-Detachable Faceplate
- Front Side IPOD Connector
- Built-In USB/SD Ports (Front)
- LCD Multi-Color Digital Display
- ID3 Tag Function
- Tone Control
- Rotary Tuning/Volume Control

- AUX-IN Jack (Front)
- Last-Track Memory
- 10 Songs Skip Up/ 10 Songs Skip Down
- Folder Up/Down Function
- Mute Function
- 2-Channel output 50W x 4 (200w Max)
- Unit Dimensions: 7W x 5.5D x 1.96H



PLR34M In-Dash AM/FM-MPX Receiver With MP3 Playback & USB/SD/Aux Inputs

NEW

- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD/MMC Card Port For MP3/WMA Music Files Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM
- Front Auxiliary Input Jack

- Stereo RCA Line Out Jack
- Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- 4 x 60 Watts Maximum Power Output
- Dimensions: 7W x 4.72D x 1.96H





PLR44MU

In-Dash AM/FM-MPX Detachable Face Receiver With MP3 Playback & USB/SD/Aux Inputs

NEW

- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- Detachable Face Panel
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD/MMC Card Port For MP3/WMA Music Files Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM

- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- 4 x 60 Watts Maximum Power Output
- Dimensions: 7W x 4.72D x 1.96H



PLR17MPUA

In-Dash AM/FM-MPX Receiver MP3 Playback w/ USB/SD Card Readers & Aux Input for iPod, MP3 Players, Smartphones, etc.

- AM/FM-MPX Stereo Tuning
- Digital LCD Display Panel
- USB/SD/MMC MP3 Player
- Auxiliary Input
- 30 Preset Stations (18FM/12AM)
- Volume/Balance Control

- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~108MHz
- RCA Line Out (4Ch)
- 200 Watts Total Output (4 x 50 Watts)
- Dimensions: 7W x 4.72D x 1.96H



PLR26MPU

In-Dash Receiver with AM/FM Radio, AUX Input for iPod/MP3 Players & SD/USB Flash Readers

- AM/FM Tuner
- 30 Preset Station Memory
- USB/SD Compatible - Play Back Your Favorite Digital Music
- Front Auxiliary Input Jack - Connect Virtually Any Digital Music Player
- LCD Digital Display

- ID3 Tag Display
- Intro/Repeat/Random Playback Modes
- Clock/Mute Functions
- Blue Button Illumination
- RCA Line Output
- 4 x 80 Watt Output
- Treble/Bass Control



PLR27MPBU

AM/FM Radio With SD/USB/MP3 Playback, 3.5mm Aux-In, Bluetooth Wireless Streaming

- AM/FM Tuner
- 30 Preset Station Memory
- USB/SD Compatible - Play Back Your Favorite Digital Music
- Front Auxiliary Input Jack - Connect Virtually Any Digital Music Player
- Stream Music From Your Bluetooth Device (iPhone, Android, BlackBerry, Etc.)

- LCD Digital Display
- ID3 Tag Display
- Intro/Repeat/Random Playback Modes
- Clock/Mute Functions
- Blue Button Illumination
- RCA Line Output
- 4 x 80 Watt Output
- Treble/Bass Control



PLR24MPM

AM/FM Receiver MP3 Playback with USB/SD/AUX-IN

- AUX-In Jack
- Tone Control
- ID3 Tag Function
- LCD Digital Display
- Last-Track Memory
- Mute & Clock Functions
- Folder Up/Down Function

- AM/FM 2-Band Radio (USA)
- Rotary Tuning/Volume Control
- Built-In Front-Loading USB/SD Ports
- 2-Channel Output 60 Watt x 4 (240 Watt Max)
- 10 Songs Skip Up/ 10 Songs Skip Down Function
- Chassis Dimensions: 7.0 W x 5.5 D x 1.96 H



PLR15MUA

In-Dash AM/FM Radio with USB/SD Memory Card Readers, Aux-Input for iPod, MP3 Players, Smartphones, etc.

- RCA Line Out
- Car MP3 Player
- Clock Function
- Built-In USB/SD
- Aux-In on Front
- 4-Channel Output
- ID3 TAG function

- LCD Digital Display
- Auto Seek
- Auto Store
- 30 Preset Memory Stations
- AM/FM 2-Band PLL Tuning Radio
- Preset EQ Function (Pop/Rock/Classic)



PLR16MUA

In-Dash AM/FM-MPX Receiver MP3 Playback with USB/SD Card

- AM/FM-MPX Stereo Tuning
- Digital LCD Display Panel
- USB/SD/MMC MP3 Player
- Auxiliary Input
- Volume Control

- AM Frequency Range: 520~1710kHz
- FM Frequency Range: 87.5~108MHz
- RCA Line Out (4Ch)
- 160 Watts Total Output(4 x 40 Watts)
- Dimensions: 7W x 4.72D x 1.96H



PLR16MPF

In-Dash AM/FM-MPX Receiver MP3 Playback with USB/SD Card

- AM/FM-MPX Stereo Tuning
- Digital LCD Display Panel
- USB/SD/MMC MP3 Player
- Volume/Balance Control
- AM Frequency Range: 520~1710kHz

- FM Frequency Range: 87.5~108MHz
- RCA Line Out (4Ch)
- 160 Watts Total Output(4 x 40 Watts)
- Dimensions: 7W x 4.72D x 1.96H



PLR14MPF

In-Dash AM/FM-MPX MP3 Shaft Style Dual Knob Radio w/USB/SD Card

- AM/FM-MPX/USB/SD MP3 Stereo
- Classic Car Audio Replacement Allows For Zero Dash Board Modification using Shaft Style Openings
- Built-In USB/ SD/ MMC MP3 Player (2 Gig Max)
- Volume/ Balance/ Tone CControl
- 1.2 Volt RCA Line Out (Amplifier Line Output)

- 2 Channel Output 80W x 2 (160W Max)
- Adjustable Shaft Knobs from 4.65-5.5
- Mounting Hardware Included
- DC 12 Volt 3 Amp Power Consumption
- Unit Dimensions: 7W x 4.72D x 1.96H



PYLE
Audio

www.PyleAudio.com



facebook.com/pyle.audiousa



twitter.com/pyleaudio



youtube.com/user/pyleaudio1

Complete Product Catalog



For more detailed product-specific information and more great models visit www.PyleAudio.com



PLRD92

9" Flip Down Roof Mount Monitor & DVD player with Wireless FM Modulator/ IR Transmitter

- 9 16:9 Wide Screen TFT-LCD Monitor
- High Resolution: 640 x 234 Pixels
- Brightness: 450 Cd/ Sq.M
- Contrast Ratio: 500:1
- Viewing Angle: 140 degree (Left/Right) 120 degree(Top/Down)
- Overhead Console with Twin Dome Lights w/ LED
- IR transmitter Ready for Wireless Headphone
- Built-In FM Modulator
- Full Function Wireless Remote

- On Screen Menu System
- Front Push Buttons Controls
- Audio/ Video Inputs
- USB SD Card Inputs
- Mult System: NTSC PAL Auto Switching
- DVD/VCD/CD/CD-R/CDRW/MP3 Compatible
- Power Requirement: 12 DC
- DIN Cable w/ RCA Jacks for A/V Connections
- Dimensions: 8.46" (W) x 2.17" (D) x 9.45" (H)



PLRD94

9.4" Flip Roof Mount Monitor & DVD Player with Wireless FM Modulator, IR Transmitter, USB Flash & SD Card Compatible

- Contrast Ratio 500:1
- PAL/NTSC Compatible
- Power Supply: DC 12V
- One Way Audio/Video Input
- One Way Audio/Video Output
- Built-In Dome LED Led Lights

- Built-In DUal IR/FM Transmitter
- Full Function Wireless Remote Control
- Display Mode: 16:9 Wide View Screen
- Slot-In Disc Loading (Anti-Shock Mechanism)
- English OSD Menu with Multi-Language Support
- Dimensions: 11.8" W x 9.96" D x 2.13" H



PLVW1342R

13.4" TFT Roof Mount Monitor & IR Transmitter

- 13.4 TFT Active Matrix Monitor
- Overhead Console w/Flip Bracket
- Wide Angle, Off Axis Visibility
- Resolution: 800x600
- 4:3 Display Format
- Front Panel Controls
- 2 Audio Video Inputs

- Swivel Bracket Permits 45° L/R Rotation
- NTSC/PAL System
- OSD English Menu
- Built-In IR Transmitter for Wireless IR Headphones
- Wireless Remote Control
- Power Supply: DC12V
- Dimension: 13.5 x 11.5 1.2"



PLVWR1440

14" High Resolution TFT Roof Mount Monitor & IR Transmitter

- 14 TFT Active Matrix System
- English OSD Menu
- NTSC/ PAL Color System
- 4:3 Display Format
- 45˚ Swivel Screen
- High Resolution 1024 x 768
- 2 AV Input

- Built-In IR Transmitter for Use with IR Headphones
- Full Function Wireless Remote Control
- Dual Dome Light Universal Roof Mount Console
- Wireless Remote Control
- DC 12 Volt Power Supply
- Dimensions: 13.5 x 11.7 x 1.25



PLVWR1442

14.7" High Resolution TFT Roof Mount Monitor & IR Transmitter

- 14.7 TFT Active Matrix System
- English OSD Menu
- NTSC/ PAL Color System
- 4:3 Display Format
- 45˚ Swivel Screen
- High Resolution 1024 x 768
- 2 AV Input

- Built-In IR Transmitter for Use with IR Headphones
- Full Function Wireless Remote Control
- Dual Dome Light Universal Roof Mount Console
- Wireless Remote Control
- DC 12 Volt Power Supply
- Dimensions: 13.5 x 11.7 x 1.25



PLVWR1542

15" High Resolution TFT Roof Mount Monitor & IR Transmitter

- 15 TFT LCD Flip Down Monitor
- Super Slim Design
- On Screen Display Menu
- Display Mode: 4:3
- High Resolution 1024 x 768
- 2 AV Inputs

- Built-In IR Transmitter for Wireless IR Headphones
- Full Function Remote Control
- Dual Dome Light
- Universal Roof Mount Console
- Dimensions: 15.2 x 13.5 x 1.4



PLVWR1752

18.5" Wide Screen TFT LCD Roof Mount Video Monitor w/IR Transmitter

- 18.5TFT/LCD Active Matrix System
- Super Slim Design
- On Screen Video Display Menu
- 16:9 Wide Screen Aspect Ratio
- High Resolution: 1280x1024
- PAL/NTSC Compatible
- Two Video Inputs

- Built-in IR Transmitter for Wireless IR Headphones
- English OSD menu
- Full Function Wireless Remote Control
- Dual Dome lights
- Universal Roof Mount Console
- Power Input: Dc 12V
- Dimensions: 17W x 13.8H x 1.2D



PLVWR1755

17.5" Flip Roof Mount Monitor W/ Wireless IR Transmitter

- 1 Audio Input
- 2 Video Inputs
- Contrast: 400:1
- System: PAL/NTSC
- Power Supply: DC12V
- With build-in LED Light
- Power Consumption:<15 Watt

- Display Mode: 16:9 Wide View Angle
- Full Function Wireless Remote Control
- High Resolution: 1440 X (RGB) X 900 Pixel
- Image Bright, Contrast, Color, Tint Adjust
- 17.5 Flip Roof Mount Monitor with Wireless IR Transmitter
- Unit dimension: 19.4 x 15 x 16.8



PLVWR1982

19" Widescreen TFT Roof Mount Monitor & IR Transmitter

- 19 TFT Active Matrix System
- English OSD Menu
- 16:9 Widescreen Format
- High Resolution 1280 x 800
- 2 Audio Video Inputs

- Built-In IR Transmitter for Wireless IR Headphones
- Full Function Wireless Remote Control
- Dual Dome Light Universal Roof Mount Console
- DC 12 Volt Power Supply
- Dimensions: 18.7W x 15H x 1.8(D)



PLVWR2200

22" Flip Down Roof Mount TFT LCD Monitor & IR Transmitter

- 22 Roof Mount TFT LCD Monitor
- English OSD Menu
- Slim Design
- High Resolution 1820 x 1080
- 2 AV Inputs w/ Built In IR Transmitter

- For Use with IR Headphones
- Full Function Wireless Remote Control
- Dual Dome Light Universal Roof Mount Console
- Dimensions: 21.5 x 15.6 x 1.5





PLVWR2400

25" Wide Screen TFT-LCD Roof Mount Video Monitor w/IR Transmitter

- 25 TFT/ LCD Active Matrix System
- On Screen Video Display Menu
- 16:9 Wide Screen Aspect Ratio
- High Resolution: 1920 x 1080
- PAL/NTSC Compatible
- Two AV Inputs
- Built-In IR Transmitter for Wireless IR Headphones

- English OSD Menu
- Full Function Wireless Remote Control
- Dual Dome Lights
- Universal Roof Mount Console
- Power Input: DC 12V
- Dimensions: 23.5 (W) x 16.8 (H) x 1.8 (D)



PLRD104

10.4" Flip Roof Mount Monitor & DVD Player with Wireless FM Modulator, IR Transmitter, USB Flash & SD Card Compatible

- Contrast Ratio 500:1
- PAL/NTSC Compatible
- Power Supply: DC 12V
- One Way Audio/Video Input
- One Way Audio/Video Output
- Built-In Dome LED Lights

- Built-In Dual IR/FM Transmitter
- Full Function Wireless Remote Control
- Display Mode: 16:9 Wide View Screen
- Slot-In Disc Loading (Anti-Shock Mechanism)
- English OSD Menu with Multi-Language Support
- Dimensions: 11.8" W x 9.96" D x 2.13" H



PLRD125

12.1" TFT LCD Flip-Down Roof Mount Built-In DVD Player w/ FM Modulator/IR Transmitter

- 12.1 16:9 Wide Screen TFT LCD Monitor
- Built-In DVD Disc Player
- High Resolution 800 x 600 Pixels
- Dual Dome Light Universal Roof Mount Console
- 320° Swivel Screen
- DVD/VCD/CD/CD-R/CD-RW/MP3 Compatible
- USB/SD/MMC/MP4/3-IN-1 Card Input
- Video System: NTSC/PAL Auto switching
- On Screen Display

- Wireless Remote Control
- With Two Joystick/Game Disc
- Audio/Video Input & Output
- Picture Brightness, Contrast, Color Adjustment
- Built-In IR Transmitter for Use with IR Headphones
- Built-In FM Transmitter
- Power Supply: DC 12V
- DIN Cable w/ RCA Jacks for A/V Connections
- Dimensions: 11.4 (W) x 12.8(H) x 2.8(D)



PLRD133F

12.1" Roof Mount TFT LCD Monitor w/ Built-In DVD Player

- 12.1 Wide Screen Hi Res TFT LCD Monitor
- Resolution: 1280 x 800
- Brightness: 450 Cd/Sq.M
- Contrast Ratio: 500:1
- Overhead Console w/ Twin Dome Lights w/ LED
- IR Transmitter Ready for Wireless Headphone
- Front Push Bottoms Controls
- Audio Video Inputs/Outputs

- Multi-System: NTSC & PAL Auto Switching
- Slot-Loading DVD Player
- DVD CD/CD/CD-R/CD-RW/MP3 Compatible
- Built-In Speaker
- Anti-Skip Mechanism
- Last Position memory
- Full Function Wireless Remote Control
- Dimension: 16.06W x 13H x 2.7D



PLRD143IF

14.1" Roof Mount TFT-LCD Monitor w/ Built in DVD Player

- 14.1 Wide Screen Hi-Resolution TFT-LCD Monitor
- FLip-Down Roof Mount
- Resolution: 1280 x 800
- Brightness: 450 Cd/Sq.M
- Contrast Ratio: 500:1
- Overhead Console w/ Twin Dome Lights w/ LED
- 90 degrees Swivel Left Right
- IR Transmitter Ready for Wireless Headphone
- Front Push Button Controls
- 1 Set Audio Video Inputs

- 1 Set Audio Video Outputs
- Multi-System: NTSC PAL Auto Switching
- Slot-Load DVD Player
- DVD/ CD/CD-R/CD-RW/MP3 Compatible
- Built-In Speaker
- Anti-Skip Mechanism
- Last Position Memory
- Full Function Wireless Remote Control
- Dimensions: 16.06W x 13H x 2.7D



PLRD145

13.3" Roof Mount TFT LCD Monitor Built In DVD/USB/SD Player w/ Wireless FM/IR Transmitter's & Included 3 Color Skins (Gry/Blk/Tan)

- 13.3 Wide Screen Hi Resolution TFT-LCD Monitor
- Overhead Console with Dual LED Dome Lights
- Resolution: 1280 x 800
- Brightness: 450 Cd/Sq.M
- Contrast Ratio: 500:1
- On Screen Menu Control
- Power Source: DC 12 Volt
- 140 degree viewing angle adjustment
- Full Function wireless remote control
- IR Transmitter Ready for Wireless Headphone
- Overhead Console with Dual LED Dome Lights
- Push button dual function front mounted controls
- 1 Set RCA Audio Video Inputs

- 1 Set RCA Audio Video Outputs
- Multi System: NTSC/PAL Auto Switch
- Side Mount Slot-Load DVD Player
- DVD CD/CD-R/CD-RW/MP3 Compatible
- Built in Speakers and audible button indicators
- Built in Anti-Skip Mechanism & Last position memory
- Dimensions: 16.25x W 13 D x 2.15 H Closed (9.75 Open)
- Wireless FM Transmitter to broadcast to a existing FM stereo (Portable/Car/Etc.)
- 3 sets of interchangeable 2pc snap-on color skins. Choose from Grey, Black, or Tan



PLRD153IF

15.1" Flip Down Monitor w/ Built In DVD/SD/USB player w/ Wireless FM Modulator/ IR Transmitter

- 15.1 Wide Screen Hi Re TFT-LCD Monitor
- Flip Down Roof Mount
- Resolution: 1440 x 900
- Brightness: 450 Cd/Sq.M
- Contrast Ratio: 500:1
- Overhead Console w/Twin Dome Light w/LED
- 90 degrees Swivel Left/Right
- IR Transmitter Ready for Wireless Headphone
- Front Push Button Controls

- RCA Audio Video Inputs
- Multi System: NTSC/PAL Auto Switching
- Slot-Load DVD Player
- DVD/CD/CD-R/CD-RW/MP3/MPEG4 Compatible
- USB SD Card Inputs
- Anti-Skip Mechanism
- Last Position Memory
- Full Function Wireless Remote Control
- Dimensions: 15.5(W) x 15.2(H) x 2.4(D)



PLRD163IF

16.4" TFT LCD Flip-Down Roof Mount w/ Built In DVD/SD/USB Player w/ Wireless FM Modulator/ IR Transmitter

- 16.4 TFT/ LCD Active Matrix System
- On Screen Video Display Menu
- 16:9 Wide Screen Aspect Ratio
- High Resolution: 1280 x 1024
- PAL/ NTSC Compatible
- AV Input/Output
- Built-In IR Transmitter for Wireless IR Headphones
- English OSD Menu

- Full Function Wireless Remote Control
- Slot-load DVD Player
- DVD/CD/CD-R/CD-RW/MP3/MPEG4 Compatible
- USB SD Card Inputs
- Dual Dome Lights
- Universal Roof Mount Console
- Power Input: DC 12V
- Dimensions: 16.6 W x 13.5 H x 2.1 D



PLRD175IF

17" Flip Down Monitor w/ Built in DVD/ SD/ USB Player w/ Wireless FM Modulator & IR Transmitter

- 17 Wide Screen Hi-Resolution TFT-LCD Monitor
- Flip-Down Roof Mount
- Resolution: 1280 x 1024
- Brightness: 450 Cd/ Sq. M
- Contrast Ratio: 500:1
- Overhead Console w/ Twin Dome Light w/ LED
- IR Transmitter Ready for Wireless Headphone
- Front Push Button Controls
- RCA Audio Video Inputs

- Multi-System: NTSC PAL Auto Switching
- Slot-load DVD Player
- DVD/CD/CD-R/CD-RW/MP3 Compatible
- USB SD Card Inputs
- Anti-Skip Mechanism
- Last Position Memory
- Full Function Wireless Remote Control
- Dimensions: 21.4W x 16.7H x 2.7D



PLRD195IF

19" Flip Down w/ Built In DVD/SD/USB Player w/ Wireless FM/ Modulator & IR Transmitter

- 19 Wide Screen Hi-Resolution TFT-LCD Monitor
- Flip-Down Roof Mount
- Resolution: 1440 x 900
- Brightness: 450Cd/Sq.M
- Contrast Ratio: 500:1
- Overhead Console w/ Twin Dome Lights w/ LED
- IR transmitter Ready for Wireless Headphone
- Front Push Button Controls
- RCA Audio Video Inputs

- Multi-System: NTSC PAL Auto Switching
- Slot-Load DVD Player
- DVD/CD/CD-R/CD-RW/MP3 Compatible
- USB SD Card Inputs
- Anti-Skip Mechanism
- Last Position Memory
- Full Function Wireless Remote Control
- Dimensions: 21.4W x 16.7H x 2.7D





PL71PHB

Adjustable Headrest Pair with Built-in 7" TFT-LCD Monitors (Black)

- Headrest Package Includes Two 7 TFT Monitor
- Screen Size: 7 TFT-LCD Monitor
- Built-in Speaker
- Aspect Ratio: 16:9 Wide Screen
- 1440 x 234 Resolution
- Contrast: Ratio: 300:1
- Brightness: 350cd/m3
- Headphone Jack
- Up Down Tilting Feature
- Viewing Angle: U/D: 160° L/R: 160°

- Response Time: 25ms
- Video Input Systems: AV1,AV2
- PAL/NTSC Compatible
- Full Function Wireless Remote Control
- English OSD Menu
- IR Transmitter for Wireless IR Headphones
- Adjustable Mounting Posts From 4 3/4 - 7 1/2
- Dual Diameter Mounting Posts (1/2 3/8)
- Dimensions: 10W x 7.5H x 4.5D



PLD72

Adjustable Headrests w/ Built-In 7" TFT/LCD Monitor w/Built-in DVD Player IR Transmitter & Cover

- 7" LCD/TFT Monitor With Built In DVD Player
- Headrest With Zipper Hide-Away Cover
- USB/SD-MMC Card Reader
- Built In Game With Joystick
- Aspect Ratio: 16:9 Widescreen
- High Resolution: 1440x234
- Contrast: 300:1
- Brightness: 350CD/M2
- AV Inputs/Outputs
- PAL/NTSC Compatible
- Auto Switching
- Full Function Wireless Remote Control
- English OSD Menu
- Power Supply: Dc12v
- Built In IR Transmitter For Wireless IR Headphones
- Plays DVD/VCD/MP3/JPG/MP4/CD-R/CD-RW
- Adjustable Mounting Posts: 4.3" To 7.1"
- Dimensions: 11.5"W X 8.3"H X 4.7"D



PLD72GR

(Gray)



PLD72TN

(Tan)



PLD72BK

(Black)



*Without DVD Players:

PL72HRGR

(Gray)

PL72HRTN

(Tan)

PL72HRBK

(Black)

PLD76

Adjustable Headrests w/ Built-In 7" TFT/LCD Monitor w/ Built-In DVD Player & IR/FM Transmitter

- 7" TFT monitor w/DVD player
- Headrest with zipper cover
- DVD/VCD/MP3/JPG/MP4
- CD-R/CD-RW, USB/SD-MMC card reader
- Built in Game with joystick
- 440 x 234 resolution - Contrast ratio: 300:1
- Brightness: 350cd/m2
- AV/Inputs/output, Auto Switching
- Full function wireless remote
- IR transmitter for IR headphones
- Dimensions: 11.5"W x 8.3"x 4.7"D



PLD76GR

(Gray)



PLD76BK

(Black)



PLD76TN

(Tan)

IR WIRELESS HEADPHONES:

Infrared wireless stereo headphones for car audio systems. Double channel for two audio sources. Compatible with all vehicle AV applications. Auto mute and auto power off. Effective range up to 10 meters Ultra light weight design for comfortable wearing with adjustable headband.

PL91HR

Adjustable Headrests w/ Built-In 9" TFT/LCD Monitor w/IR Transmitter & Cover

- 9" TFT monitor with pillow
- Full Function Wireless Remote Control
- Headrest with Zipper Hide-Away Cover
- Aspect Ratio: 16:9 Wide-Screen
- High Resolution: 1024 x 600
- Contrast Ratio: 300:1
- Brightness: 350cd/m2
- PAL/NTSC Compatible
- Front Panel Audio/Video Input
- Headphone jack
- English OSD menu
- Power Supply: Dc12v
- Built in IR Transmitter
- Adjustable Mounting Posts: 4.3" to 7.1"
- Dimensions: 11.5"W x 8.1"H x 4.7"D



PL91HRGR

(Gray)



PL91HRTN

(Tan)



PL91HRBK

(Black)



*11" Monitor Models:

PL1101HRGR

(Gray)

PL1101HRTN

(Tan)

PL1101HRBK

(Black)

PL1101HRBK

Adjustable Headrest w/ Built-In 11" TFT/LCD Monitor W/IR Transmitter & Cover (Black)

- 11TFT Monitor With Pillow
- Headrest with Zipper Hide-Away Cover
- Aspect Ratio: 16:9 wide screen
- High Resolution: 1024 x 600
- Contrast Ratio: 300:1
- Brightness: 350cd/m2

- PAL/NTSC Compatible
- Full Function Wireless Remote Control
- English OSD Menu
- Power Supply: Dc12v
- Built in IR Transmitter
- Dimensions: 13.4W x 9.3H x 5.7D



PL1101HRGR

Adjustable Headrest w/ Built-In 11" TFT/LCD Monitor W/IR Transmitter & Cover (Gray)

- 11 TFT Monitor With Pillow
- Headrest with Zipper Hide-Away Cover
- Aspect Ratio: 16:9 wide screen
- High Resolution: 1024 x 600
- Contrast Ratio: 300:1
- Brightness: 350cd/m2

- PAL/NTSC Compatible
- Full Function Wireless Remote Control
- English OSD Menu
- Power Supply: Dc12v
- Built in IR Transmitter
- Dimensions: 13.4W x 9.3H x 5.7D



PLVHR75

7" TFT Wide Screen Headrest Monitor

- PAL/NTSC System
- Two Video Inputs
- Power Supply: DC 12V
- Resolution: 1440 x 234
- Full Function Remote Control

- 7" TFT Active Matrix Display
- Back Light: Cold Cathode Filament Tube
- Headrest Shroud & Universal Stand Mount
- Viewing Angles:(Left/Right)60°(Top)30°(Down)10°
- Dimension: 7.25W x 4.75 x 0.90





PLHR76

7" Widescreen TFT/LCD Video Monitor w/Headrest Shroud

- 7 Widescreen TFT/LCD Active Matrix Monitor
- No Radiation
- Fashion Design
- PAL/ NTSC System
- High Resolution
- Low Power Consumption
- With Remote Control
- Earphone Jack Output
- 2 AV Inputs
- Headrest Shroud & Universal Stand Mount



PLHR77

7" Wide Screen TFT LCD Video Monitor w/Headrest Shroud and Universal Stand

- 7Tft LCD Active Matrix Video Monitor
- 16:9 Wide Screen
- PAL/NTSC System
- High Resolution: 480 X 234
- Wireless Remote Control
- Earphone Jack (3.5mm) Audio Output
- Two RCA Video Inputs
- AV input jack(3.5mm)
- Power Supply: Dc12v
- Headrest Shroud & Universal Stand Mount
- Dimension: 7.60W X 5.24H X 0.98D



PLHR78W

7" Widescreen TFT Headrest Monitor in White

- 7" TFT Active Matrix Display
- 16:9 Wide Screen Format
- Resolution: 1440 x 234 Dots
- NTSC / PAL System Compatible
- Wireless Remote Control
- Dual Video Input
- Reverse Imaging Left/Right Up/Down
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud and Universal Stand Mount
- On Screen Display
- Brightness, Contrast, Color
- DC 12 Volt Power
- Dimensions: 7.25 (W) x 5.65 (H) x 1.45 (D)



PLHR79

7" Widescreen TFT Headrest Monitor

- 7" TFT Active Matrix Display
- 16:9 Wide Screen Format
- Resolution: 1440 x 234 Dots
- NTSC / PAL System Compatible
- Wireless Remote Control
- Dual Video Input
- Reverse Imaging Left/Right Up/Down
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud and Universal Stand Mount
- On Screen Display
- Brightness, Contrast, Color
- DC 12 Volt Power
- Dimensions: 7.25 (W) x 5.65 (H) x 1.45 (D)



PLHR95B

9.2" Hi-Res Widescreen Headrest Monitor, Stand & Shroud - w/RCA Connectors & Remote Control (Black Color)

NEW

- 9.2 TFT/LCD Digital Monitor
- 16:9 Wide Screen Format
- High Resolution 800 x 480
- NTSC/ PAL System Compatible
- 2 Video Input, 1 Audio Input
- RCA Connectors
- Built-in IR Transmitter for Wireless Headphones

- Built with Speaker
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud & Universal Stand Mount
- Wireless Full Function Remote Control
- Power Requirement: Dc 12V +/- 10%
- Power Consumption: 5W Max
- Unit Dimensions: 8.7H x 5.7W x 0.8D



PLHR96

9" TFT LCD Headrest Monitor w/ Stand (Black)

- 16:9 Wide Screen Format
- Resolution: 1440 x 234 Dots
- NTSC / PAL System Compatible
- Wireless Remote Control
- Dual Video Input
- Built-in IR Transmitter for Wireless Headphones
- Reverse Imaging Left/Right Up/Down

- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud and Universal Stand Mount
- On Screen Display
- Brightness, Contrast, Color
- DC 12 Volt Power
- Dimensions: 9.8"W x 6.7H x 1.2D



PLHR97W

9" TFT LCD Headrest Monitor w/ Stand (White)

- 9 TFT Active Matrix Display
- 16:9 Wide Screen Format
- Resolution: 1440 x 234 Dots
- NTSC/ PAL System Compatible
- Wireless Remote Control
- Dual Video Input
- Built-in IR Transmitter for Wireless Headphones

- Reverse Imaging Left/Right Up/Down
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud & Universal Stand Mount
- On Screen Display
- Brightness/ Contrast/ Color
- DC 12 Volt Power.



PLHR98W

9.2" Hi-Res Widescreen Headrest Monitor, Stand & Shroud - w/ RCA Connectors & Remote Control (White Color)

NEW

- 9.2 TFT/LCD Digital Monitor
- 16:9 Wide Screen Format
- High Resolution 800 x 480
- NTSC/ PAL System Compatible
- 2 Video Input, 1 Audio Input
- RCA Connectors
- Built-in IR Transmitter for Wireless Headphones

- Built with Speaker
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud & Universal Stand Mount
- Wireless Full Function Remote Control
- Power Requirement: Dc 12V +/- 10%
- Power Consumption: 5W Max
- Unit Dimensions: 8.7H x 5.7W x 0.8D



PLHR9TSB

9" Headrest TFT LCD Monitor w/ VGA & Touch Screen (Black Color)

- Screen Size: 9 inch
- Type: Stand TFT LCD Monitor
- Dual Video Inputs; VGA Input with Touch Screen
- System: PAL & NTSC Auto Switching
- Power Supply: DC 12V
- OSD Menu; remote control

- AV Resolution: 800 x 480
- Contrast, Color, Brightness Adjustable
- View Angle Range: (left/right) 65° (top)40° (down)15°
- Dimensions: 10" x 6.7" x 1.2"
- Headrest in Black Color





PLHR9TSW 9" Headrest TFT LCD Monitor w/ VGA & Touch Screen (White Color)

- Screen Size: 9 inch
- Type: Stand TFT LCD Monitor
- Dual Video Inputs: VGA Input with Touch Screen
- System: PAL & NTSC Auto Switching
- Power Supply: DC 12V
- OSD Menu; remote control

- AV Resolution: 800 x 480
- Contrast, Color, Brightness Adjustable
- View Angle Range: (left/right) 65° (top) 40° (down) 15°
- Dimensions: 10" x 6.7" x 1.2"
- Headrest in white Color



PLMN7SU 7" Universal Multimedia Monitor with USB/SD Card Readers, AV Input/AV Output, Headphone Jack & Rechargeable Battery

- 7 Full Color TFT-LCD Monitor
- Headphone Jack
- On Screen Menu Control
- Built-in Stereo Speakers
- USB Flash Drive and SD Memory Card Readers
- AV Input Function for Connecting External Devices
- Built-In Rechargeable Battery - Up to 2 Hour Life
- Accessories Included: Headrest Mounting Bag, 12V Cigarette Lighter Plug & AC Adapter
- PAL/NTSC Compatible

- AC Adapter: 110-220V
- High Resolution: 480 x 234
- Electronic Shock Resistance
- Fold-Out Picture Frame Stand
- Compatibility: MP3, MP4, WMA, AVI, JPEG, DIVX & More
- Pre-Installed DOLBY Decoder for MPEG-4 Video Support
- Includes Multi-Function Remote Control
- Dimensions: 7.08 (W) x 5.9 (H) x 1.28 (D)



PLMN9SU 9" Universal Multimedia Monitor with USB/SD Card Readers, AV Input/AV Output, Headphone Jack & Rechargeable Battery

- 9 Full Color TFT-LCD Monitor
- Headphone Jack
- On Screen Menu Control
- Built-in Stereo Speakers
- USB Flash Drive and SD Memory Card Readers
- AV Input Function for Connecting External Devices
- Built-In Rechargeable Battery - Up to 2 Hour Life
- Accessories Included: Headrest Mounting Bag, 12V Cigarette Lighter Plug & AC Adapter
- PAL/NTSC Compatible

- AC Adapter: 110-220V
- High Resolution: 480 x 234
- Electronic Shock Resistance
- Fold-Out Picture Frame Stand
- Compatibility: MP3, MP4, WMA, AVI, JPEG, DIVX & More
- Pre-Installed DOLBY Decoder for MPEG-4 Video Support
- Includes Multi-Function Remote Control
- Dimensions: 9.2 (W) x 5.9 (H) x 1.28 (D)



PHR105B 10.2" Hi-Res Widescreen Headrest Monitor, Stand & Shroud - w/ RCA Connectors & Remote Control (Black Color)

- 10.2" TFT/LCD Digital Monitor
- 16:9 Wide Screen Format
- High Resolution 1024 x 600
- NTSC/ PAL System Compatible
- 2 Video Input, 1 Audio Input
- RCA Connectors
- Built-in IR Transmitter for Wireless Headphones

- Built with Speaker
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud & Universal Stand Mount
- Wireless Full Function Remote Control
- Power Requirement: Dc 12V +/- 10%
- Power Consumption: 5W Max
- Unit Dimensions: 9.7"H x 6.6"W x 0.8"D



PHR108W 10.2" TFT/LCD Headrest Monitor w/Headrest Stand & Shroud w/RCA Connectors (White Color)

- 10.2" TFT/LCD Digital Monitor
- 16:9 Wide Screen Format
- High Resolution 1024 x 600
- NTSC/ PAL System Compatible
- 2 Video Input, 1 Audio Input
- RCA Connectors
- Built-in IR Transmitter for Wireless Headphones

- Built with Speaker
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud & Universal Stand Mount
- Wireless Full Function Remote Control
- Power Requirement: Dc 12V +/- 10%
- Power Consumption: 5W Max
- Unit Dimensions: 9.7"H x 6.6"W x 0.8"D



PLHRQD7B 7" Quad TFT/LCD Video Monitor w/Headrest Shroud RCA Connectors(Black)

- 7 TFT/LCD Active Matrix Video Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- PAL/NTSC Video Format Compatible
- Reverse Image Function
- High Resolution: 480 x 234
- Operating Temperature: -20 to +65
- Wireless Full Function Remote Control

- Headrest Shroud for Flush Mounting
- Universal Stand Compatible
- RCA Connectors
- Direct DC 12 Volt Compatible
- AC Power Supply Included
- Power Requirement: Dc 12V +/- 10%
- Power Consumption: 5W Max
- Working temperature -20-60 degrees
- Storage temperature -30-70 degrees



PLHRQD7W 7" Quad TFT/LCD Video Monitor w/Headrest Shroud RCA Connectors(White)

- 7 TFT/LCD Active Matrix Video Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- PAL/NTSC Video Format Compatible
- Reverse Image Function
- High Resolution: 480 x 234
- Operating Temperature: -20 to +65

- Wireless Full Function Remote Control
- Headrest Shroud for Flush Mounting
- Universal Stand Compatible
- RCA Connectors
- Direct DC 12 Volt Compatible
- AC Power Supply Included
- Power Requirement: Dc 12V +/- 10%
- Power Consumption: 5W Max



PLHRQD9B 9" Quad TFT/LCD Video Monitor w/Headrest Shroud RCA Connectors (Black)

- 9 TFT/LCD Active Matrix Video Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- PAL/NTSC Video Format Compatible
- Reverse Image Function
- High Resolution: 640 x 234
- Operating Temperature: -20 to +65
- Wireless Full Function Remote Control

- Headrest Shroud for Flush Mounting
- Universal Stand Compatible
- RCA Connectors
- Direct DC 12 Volt Compatible
- AC Power Supply Included
- Power Requirement: Dc 12V +/- 10%
- Power Consumption: 5W Max
- Working temperature -20-60 degrees
- Storage temperature -30-70 degrees



PLHRQD9W 9" Quad TFT/LCD Video Monitor w/Headrest Shroud RCA Connectors(White)

- 9 TFT/LCD Active Matrix Video Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- PAL/NTSC Video Format Compatible
- Reverse Image Function
- High Resolution: 640 x 234
- Operating Temperature: -20 to +65

- Wireless Full Function Remote Control
- Headrest Shroud for Flush Mounting
- Universal Stand Compatible
- RCA Connectors
- Direct DC 12 Volt Compatible
- AC Power Supply Included
- Power Requirement: Dc 12V +/- 10%
- Power Consumption: 5W Max





PLVWH1

In-car Infrared Dual-Channel Wireless Stereo Headphones Compatible with In-Vehicle AV Applications For Kids and Adults

- Light Weight Design For Comfortable Wearing
- Small Ear Size Fits Children Well
- Auto Mute On Headphone
- Auto Power Off Function On Headphone
- Personal Volume Control
- Dual Channel
- A Channel: Right Channel: 2.8mhz; Left Channel: 2.3mhz
- B Channel: Right Channel: 3.8mhz; Left Channel:

- 3.2mhz
- Speaker: 30mm Mylar
- Cone Impedance: About 32ohm
- Effective Range(Maximum): About 10 Meters
- S/N Ratio: 70db(Minimum)
- Channel Separation: 40db(Minimum)
- Frequency Response: 30-20000Hz
- Power Supply: 2*AAA Battery
- Battery Life: About 48 Hours



PLVWH2

Dual A/B Channel Infrared Wireless Stereo Headphone

- Dual Channel Allows you to listen without interfering with other channels
- Studio Quality Headsets with Wide Angle Infrared Detection
- High Quality Drivers for Excelent frequency response
- Operational Distance: 100FT
- Selectable Program Source Inputs
- Adjustable Headphone Straps for Comfort
- Auto Mute Control
- Variable Volume Control
- MP3 Player Input Via 3.5mm Jack

- CCompatible with All In-Vehicle AV Application
- On/Off Switch saves battery life
- Channel (A) 2.8 MHZ (Right) 2.3 MHZ (left)
- Channel (B) 3.8 MHZ (Right) 3.2 MHZ (Left)
- Power Source: Transmitter DC 12VDC Hardwired
- 2 AAA Batteries 1.5V for each headset (not included)
- Current:<80mA
- Impedance: 10K OHM $\pm$ 15 %
- Auto on Lever: Less than 30MA (Input: 1 KHz)
- Auto off Time: 120 Sec - 240 Sec



PLVWH3

In-car Dual-Channel Wireless Stereo Headphones Compatible with In-Vehicle AV Applications

- Light Weight Design For Comfortable Wearing
- Auto Mute On Headphone
- Auto Power Off Function On Headphone
- Personal Volume Control
- Dual Channel
- A Channel: Right Channel: 2.8mhz; Left Channel: 2.3mhz
- B Channel: Right Channel: 3.8mhz; Left Channel: 3.2mhz

- Speaker: 30mm Mylar
- Cone Impedance: About 32ohm
- Effective Range(Maximum): About 10 Meters
- S/N Ratio: 70db(Minimum)
- Channel Separation: 40db(Minimum)
- Frequency Response: 30-20000Hz
- Power Supply: 2—AAA Battery
- Battery Life: About 48 Hours



PLVWH5

Wireless IR Mobile Video Stereo Headphones

- Single Wireless Infrared Stereo Headphone
- Light Weight Adjustable Size Comfortable Headset
- Power On/Off With Auto Shutdown Feature
- Volume Adjust Knob
- Carrier Frequency: Right Channel 2.8MHz, Left

- Channel 2.3 MHz
- 8 Meter Effective Range 45 degree Left Right
- Operates Up To 48 Hours On (2) AAA Batteries (Not Included)



PLVWH6

Dual Wireless IR Mobile Video Stereo Headphones w/Transmitter

- Studio Quality Headsets with Wide Angle Infrared Detection.
- Lightweight & Durable Construction
- Padded Ear Pieces For Long Term Listening
- High Quality Drivers for Excellent Frequency Response and Wired Performance.
- Headphones Feature Adjustable Fit Headsets That Can Accommodate A Child Or An Adult.
- Controls Conveniently Located On Headphone for Volume and Power.
- Auto Muting Switch On Receiver

- 12 Volt DC - 1 Amp Adapter Required To Power Transmitter(Not Included)
- Input: RCA Cable
- Power On/Off With Auto Shutdown Feature
- Carrier Frequency: Right Channel 2.8MHz, Left Channel 2.3 MHz
- 8 Meter Effective Range 45 degree Left Right
- Power Source: Transmitter DC 12VDC Hardwired, 2 AAA Batteries 1.5V For Each Headset (not included)
- Dimensions(Transmitter): 0.5 (H) X 3.75(W) X 2.5 (D)



PLCMTR71

Weatherproof Rearview Backup Camera System Kit with 7" LCD Color Monitor, IR Night Vision Camera, Dual DC Voltage 12-24 for Bus, Truck, Trailer, Van

NEW

- Monitor:
- 7 inch TFT LCD Display
- Aspect Ratio: 16:9 Widescreen
- Resolution: 480 x 234
- Dual RCA Audio & Video Inputs
- System: Pal/NTSC Auto Switching
- OSD Menu Control
- Built-in Anti Glare Sun Shade
- Universal Stand Mount
- Built in Speaker System
- DC reverse 12-24 Volt Trigger with Auto Activation feature
- Designed for Car/Truck use 12 & 24 Volt Systems
- Screen Dimensions: 6.77"W x 4.52"H x 0.87"D
- CMD Weatherproof Rearview Camera System

- Image sensor: Color CMD
- System: Pal/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- IP Rating: IP-68
- Min. Illumination: 0.2 Lux
- Auto Image Adjustment
- 18 LED Lights with IR Night Vision Illumination
- Designed for Car/Truck use with 12 & 24 Volt Systems
- Camera Dimensions: 3.18"W x 2.95"H x 2.17"D
- Includes 4-Pin 50 Foot (15 Meter) Connection Cable



PLCMTR74

Weatherproof Rearview Backup Camera System with 7" LCD Color Monitor, (4) IR Night Vision Cameras, Dual DC Voltage 12-24 for Bus, Truck, Trailer, Van

NEW

- Monitor:
- 7 TFT/LCD Active Matrix Video Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Aspect Ratio: 16:9 Widescreen Format
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- PAL/NTSC Video Format Compatible
- Reverse Image Function Auto power switch to AV2 when reversing
- High Resolution: 480 x 234
- Operating Temperature: -20 to +65
- Universal Stand & Incorporated Anti-glare Sun Visor
- 4 Pin Video Connectors
- Power Requirement: Dc 12V-24V
- Dimensions (WxHxD): 6.77 x 4.53 x 0.87
- Includes 4 Mountable Cameras

- CMD Weatherproof Rearview Camera System
- Image sensor: Color CMD
- System: Pal/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- IP Rating: IP68
- Min Illumination: 0.2Lux
- Auto Image Adjustment
- 18 LED IR Night Vision Illumination
- Distance Scale Line
- Designed for Car/Truck use 12 & 24 Volt Systems
- Camera Dimensions (WxHxD): 3.18 x 2.95 x 2.17
- Included 4 pin 50 Foot (15 Meter) Communication Cable x 4



PLCMTR104

Weatherproof Rearview Backup Camera System with 10.1" LCD Color Monitor, (4) IR Night Vision Cameras, Dual DC Voltage 12-24 for Bus, Truck, Trailer, Van

NEW

- Monitor:
- 10.1 TFT/LCD Active Matrix Video Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Aspect Ratio: 16:9 Widescreen Format
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- PAL/NTSC Video Format Compatible
- Reverse Image Function Auto power switch to AV2 when reversing
- High Resolution: 1024 x 800
- Operating Temperature: -20 to +65
- Universal Stand & Incorporated Anti-glare Sun Visor
- 4 Pin Video Connectors
- Power Requirement: Dc 12V-24V
- Dimensions: 11.22w x 7.20h x 2.91d
- Includes 4 Mountable Cameras

- CMD Weatherproof Rearview Camera System
- Image sensor: Color CMD
- System: Pal/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- IP Rating: IP68
- Min Illumination: 0.2Lux
- Auto Image Adjustment
- 18 LED IR Night Vision Illumination
- Distance Scale Line
- Designed for Car/Truck use 12 & 24 Volt Systems
- Camera Dimensions: 3.18W x 2.95H x 2.17D
- Included 4 pin 50 Foot (15 Meter) Communication Cable x 4



PLCM4350WIR

4.3" Monitor Wireless Back-Up Rearview & License Plate Camera System

- Wireless Adaptor
- 2.4G Wireless Transmitter and Receiver
- Monitor:
- Screen Size: 4.3 Inches
- Universal Mount Monitor back up camera screen system sits on your dash
- TFT-LCD Color Monitor
- Video Color System:NTSC / PAL
- Video sense input - turns on when video signal is received
- Contrast: 350:1
- Reverse Camera Priority for signal sense

- Power Supply:DC12V
- Camera:
- Super slim bar style camera
- 420 Line Horizontal Resolution
- Built-in Distance Scale Line
- Low Lux
- Resolution: 420 TV Lines
- Viewing Angle: 170 Degree
- Auto white Balance
- Waterproof (Ip68), Fog Resistant
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V





PLCM44

4.3" TFT LCD Monitor w/ Universal Mount Rear View and Backup Color CMD Distance Scale Line Camera

- Monitor:
- Screen Size: 4.3 Inches
- Universal monitor back up camera screen system sits on your dash
- TFT-LCD Color Monitor
- Video Color System: NTSC / PAL
- Video Sense input - turns on when video signal is received
- Contrast: 350:1
- Reverse-view Camera Priority for signal sense
- Power Supply: DC 12V

- Camera:
- Mini dual mount way camera Flush/Universal Bracket
- 420 Line Horizontal Resolution
- Built-in Distance Scale Line
- Low Lux
- Resolution: 420 TV Lines
- Angle: 170 Degree
- Auto White Balance
- Waterproof (Ip68), Fog Resistant
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V



PLCMDVR5

720P HD 4.3" Inch LCD Screen Rearview Mirror DVR Motion Impact Recorder with Dual Swivel Night Vision Cameras

- Built-in hidden screen : 4.3" TFT LCD monitor on or off
- High resolution: Resolution up to 1280*960
- File format: H.264 MOV Still Image JPEG
- Video resolution: Dual 720p HD: 1280x1440 30fps 8Mbps/ SD: 1280 x 480 30fps 6Mbps
- Built-in wide angle lens: Diagonal view angle is 120 degrees.
- Automatic loop recording: after car power starts
- Storage: Support SD/SDHC up to 32GB.
- Audio: Synchronized video/audio recording
- Low illumination image sensor.
- Lens adjustable 360 degree.
- Support digital Camera function

- No recording gap between file clips.
- Keeps recording for 10+ seconds after power stops.
- Wide angle rearview mirror
- Visible area: 300mm
- Operating temperature: -10°C~+60°C
- Image sensor: Mega pixels 1/4" CMOS Sensor)
- View angle: 120°
- Pixels: 1.3 Mega pixels
- Video Output: NTSC/PAL
- Operating voltage: 12V
- Power consumption : 0.5A
- Supports: Windows 2000/XP/Vista/7/8
- Mounting Hardware/USB Data cable/Wireless Remote



PLCM10

License Plate Mount Rear View camera w/Night Vision

- Output Standard: PAL/NTSC
- High Resolution: 380TV Lines x 60 Fields
- Image Sensor: Ov 7910 Color CMOS
- Lens: 6mm
- Low Light Illumination: 1.5 Lux/F1.2

- Video Output: RCA 1.0 Vpp Composite Video @ 75 Ohm
- Power Supply: DC 12 V > 75 Ohm
- Temperature: -10-50 Celcius
- Unit Dimensions: 1.3(H) x 8(W) x 1.26(D)



PLCM18BC

License Plate Mount Rear View Backup Color Camera w/ Distance Scale Line Zinc Black Chrome

- 420 TVL Horizontal Resolution
- Distance Scale Line
- True Color Reproduction
- Low Lux Performance of 0.2 LUX Night Vision
- Total Pixels: 656 x 492
- Resolution: 420 TV Lines
- Viewing Angle: 170 Degree

- Auto White Balance
- Waterproof (Ip67), Fog Resistant
- Low Lighting Capable
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V 200mA
- 17 Foot male to male RCA Video Cable
- Dimension: 10W x 1.3H x 1.26D



PLCM18SC

License Plate Mount Rear View Backup Color Camera w/ Distance Scale Line Zinc Metal Chrome

- 420 TVL Horizontal Resolution
- Distance Scale Line
- True COLOR Reproduction
- Low Lux Performance of 0.2 LUX Night Vision
- Total Pixels: 656 x 492
- Resolution: 420 TV Lines
- Viewing Angle: 170 Degree

- Auto White Balance
- Waterproof (Ip67), Fog Resistant
- Low Lighting Capable
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V 200mA
- 17 Foot male to male RCA Video Cable
- Dimension: 10W x 1.3H x 1.26D



Distance Scale Line Camera

PLCM19

Low Lux Rear Camera Black Chrome Metal Liscence Plate Frame

- 420 TVL Horizontal Resolution
- Waterproof Rating : IP67
- Sensor Image: Color CMD Sensor
- Low Light Capable
- 17 Foot Male to Male RCA Video Cable
- TV System: PAL/NTSC
- Effective Pixels: 512 x 492
- Resolution (TV Lines) : 420
- Resolution (TV Lines) : 420

- Video Output: 1.0V pp-770hm
- Lens Angle: MAX 170°
- Power Supply: DC 12V
- Current Consuption (mA): 200mA
- Dimension: 312 x 162 mm
- Operating Temperature (Deg C): -20 - +75 (RH95%MAX.)
- Storage Temperature (Deg C): -40 - +85 (RH95%MAX)



Distance Scale Line Camera

PLCM21

License Plate Rear View Backup CCD Color Camera Zinc Metal Chrome

- 420 TVL Horizontal Resolution
- True COLOR Reproduction
- Low Lux Performance of 0.3 LUX at F2.0
- Total Pixels: 512 x 492
- Resolution: 420 TV Lines
- Auto White Balance
- Waterproof (Ip67)

- Low Lighting Capable
- High Sensitive: 1/3" DSP Color CCD Built-In
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V 200mA
- 17 Foot male to male RCA Video Cable
- Dimension: 12.7W x 6.6H



PLCM221R

Flush Mount Rear View Camera w/ 0 Lux Night Vision

- CMOS Water Proof 1.25 Flush Mount Housing
- 17 Foot Male to Male RCA Video Cable
- Drill Cutout Tool Included
- Image Sensor: OV7910 Color CMOS
- Total Pixels: 510 x 492
- Resolution: 380 TV Lines
- Night Vision Low Lighting Capable

- 10 IR LED Lights
- Min Illumination: 0.5 LUX
- Auto Image Adjustment
- Video Output: 1.0V pp-75 Ohm
- Power Supply: DC 12V 200 mA
- Dimensions: 1.25(W) x 1.25(H) x 1.77(L)




PLCM241R

Universal Multi-Mount Rear View Backup Camera with Digital Line Scale Display - Waterproof

- Waterproof 1/3" Color CMD
- 17 Foot Male to Male RCA Video Cable
- Image Sensors: 1/3" Color CMD
- Total Pixels: 580 x 540
- Resolution: 420 TV Lines
- Min. Illumination: 1.0 LUX

- IP Rating: 68; Lens Angle: 170°
- Auto Image Adjustment
- Video Output: 1.0 Vpp - 75 Ohm
- Power Supply: DC 12V
- Dimensions: 0.67" (W) x 0.67" (H) x 0.9" (L)



Distance Scale Line Camera



PLCM31

3.5" Slim TFT LCD Window Suction Mount Monitor with Dual Mount Rearview Camera w/ Night Vision

- onitor:
- 3.5 window suction mount monitor
- Automatically switch when reversing
- Two video inputs
- Ntsc/Pal system auto switch
- Brightness: 200cd/m2
- Contrast: 200:1
- 12V DC cigarette plug included
- Dimension: 3.7W x 3.3H x 0.67D
- Dual mount micro sized video camera
- With full kit for both bracket mount and flush mount
- Drill bit included
- Low lux night vision camera with CMD sensor
- 170 degree L/R viewing angle
- Power supply: DC12V



DISTANCE SCALE LINE CAMERA

PLCM32

3.5" TFT LCD Monitor w/ Universal Mount Rear View and Backup Color CMD Distance Scale Line Camera

- onitor:
- 3.5 TFT LCD Stand Monitor
- 2 Video Input
- NTSC System
- Dimensions: 3.8 x 3.5 x 0.7
- Brightness: 200 cd/m2
- Contrast: 200:1
- Universal Mount
- Backup CMD Camera 1/3
- Waterproof/Night Vision
- Distance Scale Line Camera
- 17 Foot Male to Male RCA Video Cable
- Image Sensors: 580 x 540
- Resolution: 420 TV Lines
- Min. Illumination: 1.0LUX
- IP Rating: 68; Lens Angle: 170°
- Auto Image Adjustment
- Built-In Distance Scale Line
- Video Output: 1.0 Vpp-75 Ohm
- Power Supply: DC 12V
- Dimensions: 0.67 (W) x 0.67 (H) x 0.9 (L)



Distance Scale Line Camera

PLCM34WIR

3.5" Monitor Wireless Back-Up Rearview & Night Vision Camera System

- Monitor:Wireless Back Up Rear View Camera
- 3.5 Slim TFT-LCD Stand Wireless Monitor
- Night Vision Car Camera Without Video Cable Fixing(Installation)
- Automatically Switched On When Reversing
- One RCA CMD Video Input
- NTSC/PAL System Auto Switching
- Brightness: 200 cd/m
- Contrast: 200:1
- Built-in 2.4Ghz Wireless Video Reciever
- Dimensions: 4.13W x 3.35H x 0.87D
- Camera: Waterproof License Plate Mounting
- Image Sensor: OV7910 Color CMOS
- Total Pixels: 510 x 492
- Resolution: 380 TV Lines
- Night Vision Low Light Compatible
- Min.Illumination:0.5Lux
- Video Output: 1.0 Vpp-75 Ohm
- Power Supply: DC 12V 200 mA
- Dimensions: 1.3H x 8W x 1.26D



Distance Scale Line Camera



PLCM35R

3.5" TFT LCD Digital Monitor/Night Vision Rear-View Camera

- 3.5 TFT LCD Stand Monitor
- two Video Inputs
- NTSC System
- Dimesnions: 3.8 x 3.5 x 0.7
- Brightness: 200 cd/m2
- Contrast: 200:1
- Camera: CMOS waterproof 1.25 Flush Mount Housing
- 17 foot male to male RCA Video Cable
- Required Drill Cutout Tool Included
- Image Sensor: OV7910 Color CMOS
- Total Pixels: 510 x 492
- Resolution: 380 TV llines
- Night Vision Low Lighting Capable
- 10 IR LED Lights
- Min. Illumination: 0.5 LUX
- Auto Image Adjustment
- Video Output: 1.0V
- Power Supply: DC12V 200Ma
- Dimensions: 1.25 (W) x 1.25 (H) x 77 (L)



PLCM36

3.5" Slim TFT LCD Digital Universal Mount Monitor w/ License Plate Mount Rearview Night Vision Backup Camera

- Screen Description:
- 3.5slim TFT LCD Stand Monitor
- Automatically Switched On When Reversing
- Two Video Inputs
- PAL/NTSC Compatible
- Auto Switching
- Brightness: 200CD/M2
- Contrast ratio: 200:1
- Dimensions: 3.7W x 3.3H x 0.67D
- Camera Description:
- Output Standard: PAL/NTSC Compatible
- High Resolution: 380TV lines x 60 fields
- Image Sensor: OV7910 color CMOS
- Lens: 6MM 92 degree
- Low Light Illumination: 1.5LUX/ F1.2
- Video Output: RCA 1.0 VPP composite video @ 75OHM
- Power Supply: Dc12v
- Temperature: -10~ 50 Celsius
- Unit Dimensions: 1.3H x 8W x 1.26D



PLCM37FRV Universal Mount Optional Front View & Rear View Backup Color CMD Camera Built-In Distance Scale Line

- Water proof Front & Rear View Camera
- 17 Foot Male to Male RCA Video Cable
- Images Sensors: 1/3 Color CMD
- PAL/NTSC Compatible
- Total Pixels: 56- x 540
- Resolution: 420 TV Lines
- Min: Illumination: .05 LUX

- IP Rating 68; Lens Angle: 170°
- Auto Image Adjustment
- LED Light for Night Vision
- Video Output: 1.0 Vpp-75 Ohm
- Power Supply: DC 12V
- Dimensions: 0.78 (W) x 0.78 (H) x 0.78 (L)



Distance Scale Line Camera

PLCM38FRV Universal Mount Optional Front View & Rear View Backup Color CMD Distance Scale Line Camera

- Water Proof Front & Rear View Camera
- 17 Foot Male TO Male RCA Video Cable
- Image Sensors 1.3 Color DVD
- PAL/NTSC Compatible
- Total Pixels: S80 x S40
- Reclusion 420 TV Lines
- min. Illumination OS LUX

- Ip rating:68 Lens Angle: 170 degree
- Auto Image Adjustment
- LED Light For Night vision
- Distance Scale Line
- Video Output 1.0 Vpp-7S Ohm
- Power Supply: DC2v
- Dimensions: 3.18" (W) x 2.95"(H) x 2.17"(D)



Distance Scale Line Camera

PLCM39FRV Waterproof Universal Mount Rear & Front View Camera With 420 Lines of Resolution, Wide-Angle Lens, and Distance Scale Lines

- Ip rating: Ip68
- Image Sensors: 1/4 color CMD
- TV system: PAL/NTSC
- Effective Pixels: 580X540
- Resolution(Tv lines): 420

- Lens Angle: 130 degree
- Water proof
- Power supply: DC 12V
- With Front view and Rear view optional function
- Distance Scale Line



Distance Scale Line Camera

PLCM4300WIR Rearview Mirror Wireless Back-Up Camera System w/ 4.3" TFT Touch Screen & Universal Mount Low Lux Camera w/ Distance Scale Line

- 4.3 TFT/ LCD Video Monitor Built-In into Full Size Rearview Mirror w/ Built-In Anti-Glare
- Touch Screen On Screen Display
- Universal Clip On Over Existing Rearview Mirror
- 16:9 Wide Screen Video Format
- Resolution: 480(H) x 271(V)
- Video Inputs (camera) with Automatic Reverse Line Trigger
- Signal System: NTSC/PAL/Auto Switch
- Contrast Ratio: 300:1

- 2.4 Gig Hz Wireless Video Sender & Receiver Allows for Wireless Video Transfer from rear Mount Camera to Front Mont Video Monitor (Max Distance 25 Meter/ 82.02 Feet)
- Universal Mount Micro Sized Video Camera
- Low Lux Night Vision Camera with CMD sensor
- 170° L/R Viewing Angle
- Power Supply DC 12 Volts
- Mirror Dimensions: 10.78W x 3.03H x 0.98D
- Camera Dimensions: 0.59 Dia x 0.82 D



Distance Scale Line Camera

PLCM4500 Universal 4.3" Pop-Up Stealth Monitor & Aluminum Black Chrome License Plate for Rear View Back Up Camera System & built in Distance Scale Lines

- Monitor:
- Screen Size: 4.3 Inches
- Universal monitor back up camera screen system sits on your dash, Monitor pop-ups out of enclosure and folds back in when not in use
- TFT-LCD Color Monitor
- Video Color System:NTSC
- Video sense input - turns on when video signal is received
- Contrast: 350:1
- Rear-view Camera Priority for signal sense
- Power Supply:DC12V @ 115ma
- Dimensions Screen Closed:
- 13.5 (W) x 11 (D) x 2.1 (H)

- Camera:
- 420 Line Horizontal Resolution
- Adjustable Angle Lens Pivot
- Built-in Distance Scale Line
- True Color Reproduction
- Low Lux Enhanced Night Viewing for Low Light Applications
- Resolution: 420 TV Lines
- Viewing Angle: 170 Degree
- Auto White Balance
- Waterproof (Ip67), Fog Resistant
- Video Output: 1.0V PP-75 Ohm
- Accessories:
- Power Supply: DC 12V 200mA
- 17 Foot male to male RCA Video Cable
- Dimension: 5.25W x 1.25H x 4.5D



Distance Scale Line Camera



PLCM4700

4.7" Window Suction Mount TFT/LCD Monitor w/ Die Cast License Plate Mount Rearview Backup Color Camera w/ Distance Scale Line

- Monitor:
- 4.7 TFT-LCD monitor
- Window suction mount
- 16:9 wide screen
- Pal/Ntsc system
- High resolution
- Two video inputs
- Power supply: DC12V
- Cigarette lighter plug
- Brightness: 300CD
- Contrast: 200:1
- License plate mount back up rearview color camera
- Black zinc aluminum die cast chrome

- Distance scale line
- True color reproduction
- Low luc performance of 0.2 lux night vision
- Total pixels: 656 x 492
- Resolution: 420 TV lines
- Viewing angle: 170 degree
- Auto white balance
- Water proof, fog resistant
- Low light capable
- Power supply: DC12V
- 17 foot male to male RCA video cable
- Dimension: 10W x 1.3H x 1.26D



NEW



DISTANCE SCALE LINE CAMERA

PLCM4LED

Rear View Camera - 0 Lux Night Vision LED Lights with Distance Scale Lines

- Mini Square Night Vision Camera Housing
- IP-67 Waterproof Rating - Fog Resistant
- 420 TVL Horizontal Resolution
- Distance Scale Line Projection
- 4 LED Lights
- True Color Reproduction
- Total Pixels: 656 x 492

- Resolution: 420 TV Lines
- Auto White Balance
- Video Output: 1 0VPP-75 Ohm
- Power Supply: DC 12V 200mA
- Camera Viewing Angle: 170 Degrees
- Low Lux Performance of 0.2 LUX Night Vision
- Camera Dimensions: 0.9(W) x 0.9(H) x 0.9(D)



NEW



Distance Scale Line

PLCM7200

7" TFT Mirror Monitor w/ License Plate Mount Rear View Night Vision Camera

- 7 TFT (16:9) Wide Screen
- Universal Clip on Existing Mirrors
- Wireless Remote Control
- Resolution: 480xRGBx234
- Contrast Ratio: 400 CD/M2
- Viewing Angle: U/D90° L/R120°
- Power Consumption: 6W

- Auto Switch PAL/NTSC
- Dual Video Input (DVD/CAMERA/GAME)
- Rearview Night Vision Camera
- License Plate Mount
- Anti Glare Mirror
- Screen Dimensions: 10.19W x 4.25H x 1.81D
- Camera Dimensions: 8.46 W x 1.29H x 1.37D



PLCM7300BT

7" TFT Mirror Monitor W/ Rear-View Night Vision Camera Built-In Bluetooth

- 7 TFT (16:9) Wide Screen
- Universal Clip On Existing Mirrors
- Wireless Remote Control
- Resolution: 480 X RGB X 234
- Contrast Ratio: 400 CD/M2
- Viewing Angle: U/D90° L/R120°
- Power Consumption: 6W
- Auto Switch PAL/NTSC

- Dual Video Input (DVD/CAMERA/GAME)
- Rearview Night Vision Camera
- Built-In Bluetooth System
- Display In-coming Calls
- License Plate Mount
- Anti Glare Mirror
- Screen Dimensions: 10.19 W X 4.25 H X 1.81D
- Camera Dimensions: 8.46 W X 1.29 H X 1.37D



PLCM7500

7" Window Suction Mount TFT/LCD Video Monitor w/ Universal Mount Rearview Backup Color Camera & Distance Scale Line

- Monitor:
- 7 TFT-LCD monitor
- With window mount bracket
- 16:9 wide screen
- Pal/Ntsc system
- High resolution
- Wireless remote control
- Two video inputs
- Power supply: DC12V
- Dimension: 7.60W x 5.24H x 0.98D
- License plate mount back up rearview color camera
- Black zinc aluminum die cast chrome

- Distance scale line
- True color reproduction
- Low luc performance of 0.2 lux night vision
- Total pixels: 656 x 492
- Resolution: 420 TV lines
- Viewing angle: 170 degree
- Auto white balance
- Water proof, fog resistant
- Low light capable
- Power supply: DC12V
- 17 foot male to male RCA video cable
- Dimension: 10W x 1.3H x 1.26D



Distance Scale Line Camera

PLCM7700

7" Window Suction Mount TFT/LCD Video Monitor w/ Universal Mount Rearview Backup Color Camera w/ Distance Scale Line Camera

- TFT-LCD monitor:
- Universal stand bracket included
- Window suction mount
- 16:9 wide screen
- PAL/NTSC system
- High resolution
- Wireless remote control
- Two video inputs
- Power supply: DC12V
- Dimension: 7.60W x 5.24H x 0.98D
- Universal mount
- Backup CMD camera 1/3

- Water proof/Night vision Distance scale line camera
- 17 foot male to male RCA video cable
- Image sensors: 580x540
- Total pixels: 580x540
- Resolution: 420 TV lines
- Min. illumination: 1.0 lux
- IP rating: 68; lens angle: 170
- Auto image adjustment
- Video output: 1.0Vpp-75Ohm
- Power supply: DC12V
- Dimension: 0.67W x 0.67H x 0.9L



Distance Scale Line Camera

PLCM7800

7" TFT/LCD Mirror Monitor with License Plate Mount Rearview Backup Color Camera

- Monitor:
- 7 inch TFT LCD (16:9) wide screen
- Universal clip on existing mirrors
- Wireless remote control
- Resolution: 800 x RGB x 480
- Power consumption: 7W
- Pal/Ntsc auto switch
- Dual video inputs
- Anti glare mirror
- Camera:
- License plate mount back up rearview color camera
- Black zinc aluminum die cast chrome
- Distance scale line

- True color reproduction
- Low lux performance of 0.2 lux night vision
- Total pixels: 656 x 492
- Resolution: 420 tv lines
- Viewing angle: 170 degree
- Auto white balance
- Water proof(IP67), fog resistant
- Low lighting capable
- Accessories:
- Video output: 1.0V PP, 75 Ohm
- Power supply: DC12V, 200mA
- 17 feet male to male RCA video cable
- Dimension: 10(W) X 1.3(H) X 1.26(D)



Distance Scale Line Camera

PLCM8200

8.1" TFT LCD Monitor w/ Dual Universal Mount, Rear View & Backup Color CMD Distance Scale Line Camera

- Monitor:
- 8.1 TFT LCD (16:9) Widescreen
- Universal Clip on Existing Mirrors
- Wireless Remote Control
- Resolution: 800 x RGB x 480
- Power Consumption: 7W
- PAL/NTSC Auto Switch
- Dual Video Inputs
- Anti Glare Mirror
- Dimension: 9.2(W) x 3.7(H) x 0.79(D)
- Camera:
- Universal Dual-Mount Camera
- Backup CMD Camera 1/3
- Water proof/ Night Vision

- Distance Scale Line
- RCA Video Cable
- Image Sensors: 580 x 540
- Resolution: 420 TV Lines
- Min. Illumination: 1.0 LUX
- IP Rating: 68; Lens Angle: 170°
- Auto Image Adjustment
- Built-In Distance Scale Line
- Video Output: 1.0V pp-74 Ohm
- Power Supply: DC12V, 200mA
- Drill Bit Included
- 17 Ft Male to Male RCA Video Cable
- Dimensions: 0.67(W) x 0.67(H) x 0.9(L)



Distance Scale Line Camera

PLCM9200

9.2" TFT/LCD Mirror Monitor with License Plate Mount Rearview Backup Color Camera

- Monitor:
- 9.2inch TFT LCD (16:9) wide screen
- Universal clip on existing mirrors
- Wireless remote control
- Resolution: 800 x RGB x 480
- Power consumption: 7W
- Pal/Ntsc auto switch
- Dual video inputs
- Anti glare mirrorCamera:
- License plate mount back up rearview color camera
- Black zinc aluminum die cast chrome
- Distance scale line

- True color reproduction
- Low lux performance of 0.2 lux night vision
- Total pixels: 656 x 492
- Resolution: 420 tv lines
- Viewing angle: 170 degree
- Auto white balance
- Water proof(IP67), fog resistant
- Low lighting capable
- Video output: 1.0V PP, 75 Ohm
- Power supply: DC12V, 200mA
- 17 feet male to male RCA video cable
- Dimension: 10(W) X 1.3(H) X 1.26(D)



Distance Scale Line Camera

PLCMB20

Universal Mount Infrared Adjustable Angle Rear View Camera with Anti-glare Shield & Distance Scale Line

- CMD Water Proof Rear View Camera
- 17 Foot Male to Male RCA Video Cable
- Image Sensors: 1/3 color CMD
- PAL/NTSC Compatible
- Video Output: 1.0V pp-75 Ohm
- Effective Pixels: 580X540
- Resolution (TV lines): 420
- Lens Angle: 170 degree

- IP rating: Ip68
- Min Illumination: 0.5 LUX
- Auto Image Adjustment
- With LED light for night vision
- Distance Scale Line
- Power supply: DC 12V
- Size: 3.18 x 2.95 x 2.17



Distance Scale Line Camera



NEW



PWD206

Card Immobilizer

- Fully Automatic Immobilizer
- Universal Operation
- On Board Buzzer for Arming/Disarming Confirmation
- Status Memory
- 264 Code Combination
- Cut 2 or 3 Circuits



PSP8

All Weather 5" PA Mono Extension Horn Speaker

- 5" Reflex ABS Horn
- 15 Watts RMS Nominal Power
- 25 Watts Peak Maximum Power
- 8 Ohms Impedance
- Frequency Response: 450~5,000Hz
- Output: 112dB
- 180° Swiveling Adjustable Bracket
- 10 Pre Wired Cord with 3.5mm Mono Connector



PWD603RS

4-Button Remote Start/Door Lock Vehicle Security System

- Two 4-button extended range transmitters
- Four 30 amp relays for starter, ignition 1, ignition 2, (programmable), and accessories outputs
- 15 amp relay for parking lights
- Programmable door lock outputs
- Compatible with diesel and gasoline vehicles
- Programmable adjustable crank settings
- Tach or voltage sense
- Built-in LED/Valet switch into the remote receiver
- Parking light and LED diagnostics

- Ground while running output
- Hybrid Vehicle Mode
- Factory alarm arm & disarm outputs
- Panic Mode
- Programmable run time
- Programmable cold start 2, 3, 4 hours
- Comfort Closure
- Auxiliary output
- Horn output
- Car finder



PWD701

4-Button Car Remote Door Lock Vehicle Security System

- 2 Four Button Transmitters
- Status indicator LED
- Valet / override switch
- 120dB 6-tone siren
- Dual stage impact detector
- Remote panic mode
- Remote chirp mute
- Remote sensor bypass
- Passive or active arming
- Flashing parking lights
- Anti-carjack
- 2 Auxiliary outputs
- Limited Lifetime Warranty Optional Features

- Starter defeat
- Horn honk output
- Remote keyless entry
- Illuminated entry
- Remote trunk release
- Hood and trunk protection
- Remote auto start
- Power window roll up
- Back up battery
- Additional Sensors (Not Included)
- Glass break
- Microwave



PWD901

LCD 2-Way Remote Start Security System w/Advanced Impact Sensor

- One 2-way LCD Transmitter
- One 4-Button Water Resistant Transmitter
- Extended Range Transceiver
- Encrypted Coded Transmission
- LED Status Indicator
- 125 db Siren
- Starter Defeat
- Remote Engine Start
- Electronic Impact Sensor with light Impact Response
- Remote Panic Mode
- Remote Valet Mode
- Auxiliary Output
- Remote Chirp Defeat
- Remote Sensor Bypass
- Passive or Active Arming
- Ignition controlled Door Lock/Unlock

- Automatic Sensor Bypass for Defective Zones
- Tamper Alert
- Non-Volatile Memory
- limited lifetime Warranty
- Optional Features:
- Remote Keyless Entry
- Remote Trunk Release
- Illuminated Entry
- Trunk/Hatch Release
- Horn Honk Output
- Back-Up Battery
- Power Window Rollup
- Hood and Trunk Protection
- Additional Sensors (Not Included)
- Glass Break
- Radar



PLPSE4P

4 Parking Sensor System & Led Display

- 6 Piece Rear Parking System (Sensors x 4, Brain, Display)
- 4 x 1 Diameter Wired Rear Sensors (9 Foot)
- Digital Distance Object Wired Indicator (25 Foot)
- 4 Color 7 Stage Led Indicator
- 4 Stage Built-in Beeping Alarm

- Display Distance: 2.0m ~ 0.3m
- Reverse Sensor Trigger
- Sensor Cutout Tool Included
- Dc 12v Application
- Dimensions (Display): 0.75" (H) X 4.25"(W) X 1.25 (L)
- Dimensions(Brain): 1" (H) X 3.65"(W) X 2.15 (L)





PINV11



PINV3300

PINV11

Plug in Car 50 Watt 12v DC to 115 Volt AC Power Inverter w/ Modified Sine Wave

- | | | |
|--|---|---|
| <ul style="list-style-type: none"> • Output Voltage: 100V-120V • Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave • Input DC Voltage: 10-15 Volts • Built-in Fuse: N/A | <ul style="list-style-type: none"> • Undervoltage Alarm: 10.4 - 11.0 Volts DC • Off Low pressure: 9.7 - 10.3 Volts DC • Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc • No - Load Consumption: 12 Volts DC • No - Load Current: <0.3 Amps | <ul style="list-style-type: none"> • Continuous Output Power: 50 Watts • Surge Peak Output Power: 100 Watts • Dimensions: 3.54"L x 3.14"W x 1.69"H • Weight: 250G |
|--|---|---|

PINV22

Plug in Car 100 Watt 12v DC to 115 Volt AC Power Inverter w/ Modified Sine Wave & 5 Volt USB Outlet

- | | | |
|--|--|---|
| <ul style="list-style-type: none"> • Output Voltage: 100V-120V • Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave • Input DC Voltage: 10-15 Volts • 5 Volt USB Outlet Port | <ul style="list-style-type: none"> • Built-in Fuse: N/A • Undervoltage Alarm: 10.4 - 11.0 Volts DC • Off Low pressure: 9.7 - 10.3 Volts DC • Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc • No - Load Consumption: 12 Volts DC | <ul style="list-style-type: none"> • No - Load Current: <0.3 Amps • Continuous Output Power: 100 Watts • Surge Peak Output Power: 200 Watts • Dimensions: 3.54"L x 3.14"W x 1.69"H • Weight: 280G |
|--|--|---|

PINV33

Plug in Car 200 Watt 12v DC to 115 Volt AC Power Inverter w/ Modified Sine Wave & 5 Volt USB Outlet

- | | | |
|--|---|---|
| <ul style="list-style-type: none"> • Output Voltage: 100V-120V • Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave • Input DC Voltage: 10-15 Volts • 5 Volt USB Outlet Port | <ul style="list-style-type: none"> • Built-in Fuse: 40 Amp • Undervoltage Alarm: 10.4 - 11.0 Volts DC • Off Low pressure: 9.7 - 10.3 Volts DC • Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc • No - Load Consumption: 12 Volts DC | <ul style="list-style-type: none"> • No - Load Current: <0.3 Amps • Continuous Output Power: 300 Watts • Surge Peak Output Power: 400 Watts • Dimensions: 4.13"L x 4.40"W x 2.04"H • Weight: 350G |
|--|---|---|

PINV44

Plug in Car 300 Watt 12v DC to 115 Volt AC Power Inverter w/ Modified Sine Wave & 5 Volt USB Outlet

- | | | |
|--|---|---|
| <ul style="list-style-type: none"> • Output Voltage: 100V-120V • Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave • Input DC Voltage: 10-15 Volts • 5 Volt USB Outlet Port | <ul style="list-style-type: none"> • Built-in Fuse: 40 Amp • Undervoltage Alarm: 10.4 - 11.0 Volts DC • Off Low pressure: 9.7 - 10.3 Volts DC • Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc • No - Load Consumption: 12 Volts DC | <ul style="list-style-type: none"> • No - Load Current: <0.3 Amps • Continuous Output Power: 300 Watts • Surge Peak Output Power: 600 Watts • Dimensions: 4.92"L x 4.40"W x 2.04"H • Weight: 650G |
|--|---|---|

PINV55

Plug in Car 500 Watt 12v DC to 115 Volt AC Power Inverter w/ Modified Sine Wave & 5 Volt USB Outlet

- | | | |
|--|---|---|
| <ul style="list-style-type: none"> • Output Voltage: 100V-120V • Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave • Input DC Voltage: 10-15 Volts • 5 Volt USB Outlet Port | <ul style="list-style-type: none"> • Built-in Fuse: 40 Amp • Undervoltage Alarm: 10.4 - 11.0 Volts DC • Off Low pressure: 9.7 - 10.3 Volts DC • Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc • No - Load Consumption: 12 Volts DC | <ul style="list-style-type: none"> • No - Load Current: <0.3 Amps • Continuous Output Power: 300 Watts • Surge Peak Output Power: 1,000 Watts • Dimensions: 5.70"L x 4.40"W x 2.04"H • Weight: 700G |
|--|---|---|

PINV66

Plug in Car 600 Watt 12v DC to 115 Volt AC Power Inverter w/ Modified Sine Wave & 5 Volt USB Outlet

- | | | |
|--|---|---|
| <ul style="list-style-type: none"> • Output Voltage: 100V-120V • Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave • Input DC Voltage: 10-15 Volts • 5 Volt USB Outlet Port | <ul style="list-style-type: none"> • Built-in Fuse: 2 x 40 Amp • Undervoltage Alarm: 10.4 - 11.0 Volts DC • Off Low pressure: 9.7 - 10.3 Volts DC • Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc • No - Load Consumption: 12 Volts DC | <ul style="list-style-type: none"> • No - Load Current: <0.3 Amps • Continuous Output Power: 600 Watts • Surge Peak Output Power: 1,200 Watts • Dimensions: 6.49"L x 4.40"W x 2.04"H • Weight: 850G |
|--|---|---|

PINV1500

Plug in Car 1,500 Watt 12v DC to 115 Volt AC Power Inverter w/ Modified Sine Wave & 5 Volt USB Outlet

- | | | |
|--|---|---|
| <ul style="list-style-type: none"> • Output Voltage: 100V-120V • Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave • Input DC Voltage: 10-15 Volts • 5 Volt USB Outlet Port | <ul style="list-style-type: none"> • Built-in Fuse: 5 x 40 Amp • Undervoltage Alarm: 10.4 - 11.0 Volts DC • Off Low pressure: 9.7 - 10.3 Volts DC • Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc • No - Load Consumption: 12 Volts DC | <ul style="list-style-type: none"> • No - Load Current: <0.3 Amps • Continuous Output Power: 1,500 Watts • Surge Peak Output Power: 3,000 Watts • Dimensions: 15.35"L x 7.08"W x 2.95"H • Weight: 3800G |
|--|---|---|

PINV3300

Plug in Car 3,000 Watt 12v DC to 115 Volt AC Power Inverter w/ Modified Sine Wave & 5 Volt USB Outlet

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> • Output Voltage: 100V-120V • Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave • Input DC Voltage: 10-15 Volts • 5 Volt USB Outlet Port | <ul style="list-style-type: none"> • Built-in Fuse: 12 x 40 Amp • Undervoltage Alarm: 10.4 - 11.0 Volts DC • Off Low pressure: 9.7 - 10.3 Volts DC • Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc • No - Load Consumption: 12 Volts DC | <ul style="list-style-type: none"> • No - Load Current: <0.3 Amps • Continuous Output Power: 3,000 Watts • Surge Peak Output Power: 6,000 Watts • Dimensions: 15.35"L x 7.08"W x 5.90"H • Weight: 8000 g |
|--|--|--|



PSWNV120 24V DC to 12V DC Power Step Down 120 Watt Converter W/ PMW Technology

- PMW Power Technology
- Power Output 60W Continuous
- Power Output 120W Peak
- For Use in 24 Volt Vehicles Trucks, RV, Buses, Etc. Allows installation of 12 Volt Items Such as Car Stereos, CB Radios, Fog Lights, Etc.
- No load current draw:<0.2 Amp

- 4 Ways Protection (Short Circuit, Over Load, High Voltage & Low Voltage)
- Input Voltage:DC 24 Volt
- Output Voltage: DC 12.5v-12.8 Volt
- Fuse Rating:5A
- Converse Efficiency: 85%
- Dimensions: 1.96 x 4.72 x 1.88



PSWNV240 24V DC to 12V DC Power Step Down 240 Watt Converter W/ PMW Technology

- PMW Power Technology
- Power Output 120W Continuous
- Power Output 240W Peak
- For Use in 24 Volt Vehicles Trucks, RV, Buses, Etc. Allows installation of 12 Volt Items Such as Car Stereos, CB Radios, Fog Lights, Etc.
- No load current draw:<0.2 Amp

- 4 Ways Protection (Short Circuit, Over Load, High Voltage & Low Voltage)
- Input Voltage:DC 24 Volt
- Output Voltage: DC 12.5v-12.8 Volt
- Fuse Rating:10A
- Converse Efficiency: 85%
- Dimensions: 3.34 x 4.72 x 1.88



PSWNV480 24V DC to 12V DC Power Step Down 480 Watt Converter W/ PMW Technology

- PMW Power Technology
- Power Output 240W Continuous
- Power Output 480W Peak
- For Use in 24 Volt Vehicles Trucks, RV, Buses, Etc. Allows installation of 12 Volt Items Such as Car Stereos, CB Radios, Fog Lights, Etc.
- No load current draw:<0.2 Amp

- 4 Ways Protection (Short Circuit, Over Load, High Voltage & Low Voltage)
- Input Voltage:DC 24 Volt
- Output Voltage: DC 12.5v-12.8 Volt
- Fuse Rating:20A
- Converse Efficiency: 85%
- Dimensions: 4.72 x 4.72 x 1.88



PSWNV720 24V DC to 12V DC Power Step Down 720 Watt Converter W/ PMW Technology

- PMW Power Technology
- Power Output 360W Continuous
- Power Output 720W Peak
- For Use in 24 Volt Vehicles Trucks, RV, Buses, Etc. Allows installation of 12 Volt Items Such as Car Stereos, CB Radios, Fog Lights, Etc.
- No load current draw:<0.2 Amp

- 4 Ways Protection (Short Circuit, Over Load, High Voltage & Low Voltage)
- Input Voltage:DC 24 Volt
- Output Voltage: DC 12.5v-12.8 Volt
- Fuse Rating:30A
- Converse Efficiency: 85%
- Dimensions: 5.51 x 4.72 x 1.88



PNVU200

Plug In Car Compact 160 Watt Power Inverter DC/AC

- Cigarette Lighter Powered With 1 Power Output
- 80 Watts Maximum Continuous AC Output Power
- 160 Watts Maximum AC Output Surge Power
- General Dual 115 Volts 60 Cycles as Power From Any 12 Volt
- USB Airplane Power Plug
- Replaceable Spade Fuse
- Use In Car, Truck, RV or Boat
- 90% Optimum Efficiency
- Use For Video Games

- 12.8-20 Amp Input Current
- Less Than 0.3A No Load Current Draw
- Electronic Over Load Protection w/Automatic Shutdown
- Low Battery Voltage Warning Followed By Automatic Shutdown
- High Input Voltage Protection
- Input Reverse Polarity Protection
- Dimensions: 3.10W x 0.75H x 5.5D



PNV3000

Plug In Car 3000 Watts 12v DC to 115V AC power inverter with modified sine wave

- No load current draw: <0.2Amp
- Low voltage alarm: 10.5v +/- 0.5v
- Low voltage shut down: 10.0v +/- 0.5v
- High voltage shut down: 15.5v +/- 0.5v
- Built-in cooling fan
- Input voltage range: 10v - 15.5v (+/- 0.5v)
- Output voltage: 115V +/- 5V

- Converting efficiency: >85%
- Low voltage / high voltage / overload / thermal protection circuitry
- Continued Power: 1500W
- Surge power: 3000 Watts
- Dimension: 13.58(L) x 6.93(W) x 2.95(H)



PNV4000

Plug In Car 4000 Watts 12v DC to 115V AC power inverter with modified sine wave

- No load current draw: <0.2Amp
- Low voltage alarm: 10.5v +/- 0.5v
- Low voltage shut down: 10.0v +/- 0.5v
- High voltage shut down: 15.5v +/- 0.5v
- Built-in cooling fan
- Input voltage range: 10v - 15.5v (+/- 0.5v)
- Output voltage: 115V +/- 5V

- Converting efficiency: >85%
- Low voltage / high voltage / overload / thermal protection circuitry
- Continued Power: 2000W
- Surge power: 4000W
- Dimension: 15.94L x 6.93W x 2.95H



PLV12V2

1 TO 2 Cigarette Lighter Multiplier

- Powers two 12 Volt Electronic Items
- Chrome Shafted Design
- Two Front Mount Female Cigarette Lighter Ports
- Single Rear Mount Male Cigarette Lighter Power

- Source
- Ultra Bright LED Indicator
- Input 12-24 Volt DC



PL12AT3C

Plug In Car 1 TO 3 Cigarette Lighter Multiplier Ashtray Combo

- Powers three 12 Volt Electronic Items
- Two Piece Unit Construction with Functional Ashtray
- Fits Securely in Most Cupholders

- Three Top Mount Female Cigarette Lighter Ports
- Single Corded Male Cigarette Lighter Power Source
- Input 12-24 Volt DC





PL12V1



PL12V2AC



PL12V3US



PL12V2CP



PL12V23P



PL12V4P

PL12V1

Plug In Car Cigarette Lighter Port Extension

- Powers One DC 12 Volt Item
- Single Female Cigarette Lighter corded Power Port
- Single Rear Mount Male Cigarette Lighter Power Source
- Input 12~24 Volt DC

PL12V2AC

Plug In Car 1 TO 2 Cigarette Lighter Multiplier & Adjustable AC Voltage Transformer

- Powers two 12 Volt Electronic Items
- Two Front Mount Corded Female Cigarette Lighter Ports
- Single Corded Male Cigarette Lighter Power Source
- Adjustable AC Voltage with 4 way Port
- Input 12~24 Volt DC

PL12V2CP

Plug In Car 1 TO 2 Cigarette Lighter Multiplier

- Powers Five 12 Volt Electronic Items
- Two Top Mount Female Cigarette Lighter Ports with Covers
- Single Corded Male Cigarette Lighter Power Source
- Input 12~24 Volt DC

PL12V3P

Plug In Car 1 TO 3 Cigarette Lighter Multiplier & Power Control Station

- Powers Three 12 Volt Electronic Items
- Three Front Mount Corded Female Cigarette Lighter Ports
- Single Corded Male Cigarette Lighter Power Source
- Individual Power Control Stations
- Input 12~24 Volt DC

PL12V3US

Plug In Car 1 TO 3 Cigarette Lighter Multiplier With USB Charger

- Powers Three 12 Volt Electronic Items
- 5 Volt USB Fullsize Female Port
- Three Front Mount Female Cigarette Lighter Ports
- Single Corded Male Cigarette Lighter Power Source
- Ultra Bright LED Indicator
- Input 12~24 Volt DC

PL12V4P

Plug In Car 1 TO 4 Cigarette Lighter Multiplier & Power Control Station

- Powers Four 12 Volt Electronic Items
- Four Front Mount Corded Female Cigarette Lighter Ports
- Single Corded Male Cigarette Lighter Power Source
- Individual Power Control Stations
- Input 12~24 Volt DC

PLFMT6

FM Radio Transmitter Smartphone Connector (Connects Your Smartphone to Your Car for Hands-Free Call Answering and Music Playing)

- Enjoy Hands-Free Calls When You Connect to Your Smartphone
- One-Touch Button Control to Switch Between Answering Calls and Streaming Music
- Routes Phone Calls and Music from Smartphone to Car Stereo
- FM Transmitter Wirelessly Connects to Car Speakers
- USB Port Allows you to Charge Your Device

- Quick and Easy Setup
- Illuminated Display
- Magnetic Mount for Convenience
- 3.5mm Headphone Audio Connector
- No Need to Charge, Connects via Cigarette Lighter
- Works with Virtually Any Smartphone/Cell Phone with Headphone Jack
- Size (L x H x W): 1.8 x 3 x 0.5-Inches



PL12VP3C

Plug In Car 1 TO 3 Cigarette Lighter Multiplier Cupholder Design

- Powers three 12 Volt Electronic Items
- Fits Securely in Most Cupholders
- Three Top Mount Female Cigarette Lighter Ports

- Single Corded Male Cigarette Lighter Power Source
- Input 12~24 Volt DC



PLDN35T

3.5mm / 1/8 To 3.5mm / 1/8 Stereo Audio Ground Loop Isolator/ Audio Line Driver

- 3.5mm / 1/8" Female Stereo (Left/Right) Audio Input
- 3.5mm / 1/8" Male Stereo (Left/Right) Audio Output
- 6 Volt Audio Line Driver
- Wide Input Signal Range 50mv-6v
- Designed to filter out engine noise emitted from

- devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with all audio players with 3.5mm / 1/8" audio outputs mp3, Ipod, etc.



PLDN36I

Ipod Direct To 3.5mm / 1/8 Stereo Audio Ground Loop Isolator/ Audio Line Driver

- Ipod Direct Stereo (Left/Right) Audio Input
- 3.5mm / 1/8 Male Stereo (Left/Right) Audio Output
- 6 Volt Audio Line Driver
- Wide Input Signal Range 50mv-6v
- Designed to filter out engine noise emitted from

- devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with Ipod to devices with 3.5mm / 1/8 Stereo Aux input



PLDN37R

3.5mm Female To RCA Stereo Male Audio Ground Loop Isolator/ Audio Line Driver

- 3.5mm / 1/8" Female Stereo (Left/Right) Audio Input
- RCA Male Stereo (Left/Right) Audio Output
- 6 Volt Audio Line Driver
- Wide Input Signal Range 50mv-6v
- Designed to filter out engine noise emitted from

- devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with 3.5mm / 1/8" (mp3, iPod, Etc) into Radio/Source Unit With RCA Input jacks





PLDN38RI iPod Direct To RCA Stereo Audio Ground Loop Isolator/ Audio Line Driver (30-Pin iPod Connector)

- iPod Direct Stereo (Left/Right) Audio Input
- RCA Male Stereo (Left/Right) Audio Output
- 6 Volt Audio Line Driver
- Wide Input Signal Range 50mv-6v
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with Ipod to devices with RCA Stereo Aux input
- 30-Pin iPod Connector



PLGI35T 3.5MM / 1/8 Stereo Audio Ground Loop Isolator

- 3.5mm / 1/8 Female Stereo (Left/Right) Audio Input
- 3.5mm / 1/8 Female Stereo (Left/Right) Audio Output
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with all audio players with 3.5mm /1/8 audio outputs mp3, Ipod, etc.



PLGI36R 3.5MM - 1/8 To RCA Stereo Audio Ground Loop Isolator

- RCA Male Stereo (Left/Right) Audio Output
- 3.5mm - 1/8 Female Stereo (Left/Right) Audio Input
- Breaks Ground Loops to Eliminate Engine Interference
- Filters out engine noise emitted from devices while on charge
- Designed for use with all audio players with 3.5mm /1/8(ipod, MP3 player, etc.) Into Radio / Source units with RCA ports audio inputs



PLGI37I Ipod Direct To 3.5mm / 1/8 Stereo Audio Ground Loop Isolator

- Ipod Direct Stereo (Left/Right) Audio Input
- 3.5mm / 1/8 Male Stereo (Left/Right) Audio Output
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with Ipod to devices with 3.5mm / 1/8 Stereo Aux input



PLGI38RI Ipod Direct to RCA Stereo Audio Ground Loop Isolator/ Audio Line Driver

- Ipod Direct Stereo (Left/Right) Audio Input
- RCA Male Stereo (Left/Right) Audio Output
- 6 Volt Audio Line Driver
- Wide Input Signal Range 50mv-6v
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with Ipod to devices with RCA Stereo Aux input



PLIPA2

2 Channel 300 Watt Mini Amplifier w/iPod Direct Input

- 2 Channel IC Mini Amplifier with w/iPod Direct Input Plug
- 2 x 15 Watts RMS @ 4 Ohms/ 2 x 150 Watts Peak
- 3 way Selectable Electronic Crossover Network
- Adjustable Gain Control
- iPod Direct Audio Inputs
- Power Protection Circuitry

- T.H.D. 1%
- 4 Ohm Stereo Stable
- Anti-Thump Turn On
- Soft Turn On/Off
- Dc: 12-14.8 Volt
- Size: 3.94L x 2.99W x 1.49H



PLIPG1

iPod 3.5mm Stereo to RCA Adaptor

- 3.5mm Stereo (Female) to RCA (Male) 3 Foot Adaptor
- Allows Direct Connection Of Any Headphone Equipped Audio Device To Your existing RCA Aux Input on the Head Unit

- Easily mounted under dash for convenience
- Stereo 3 Foot 3.5mm(Male) To 3.5mm(Male) Audio Cable Included



PLVHL60

2 Channel Speaker to RCA Converter

- 2 Channel Hi/Low Level RCA Converter
- Level Adjustable
- Ground Loop Isolation and Noise Elimination
- Aluminum Housing

- Max Input: 50W
- 2 x Female RCA Outputs
- Dimensions: 3.6L x 2.6W x 1.08H



PLVHL70

2-Channel HI Level To Low Level Converter with 12V Remote Turn-On

- Full DC Isolation
- Adjustable Attenuation
- Dual Channel
- MAX Input: 45 Watts per Channel
- Output Adjustment: 50%
- Freq Response : 20Hz-20KHz
- Gray: R(+)

- Gray/ White R(-)
- Green L(+)
- Green/ White L(-)
Trigger wire Connctions:
- Red +12V DC Constant Power
- Black Ground
- Blue +12V DC Output (when head unit is turned on)



PLV2

1 Into 4 Mobile Video Signal Distribution Amplifier

- 1 Into 4 Mobile Video Amplifier
- One Rca Video Gold Plated Input Jack
- Four Rca Video Gold Plated Output Jacks
- Individual Variable Video Level Controls
- Power On Indicator
- Video Input Level: 2.0Vp-p

- Output Level: 0.5-1.5Vp-p
- Output Impedance: 75 Ohm
- With 4 Mounting Tabs
- Dc 12V Power Input
- Dimensions: 1 X 4.1X 2.9 L





PLMD56

7 Channel FM Stereo Modulator w/RCA Audio Outputs

- FM Modulator
- Antenna RF Input(Female) Output(Male) Jacks
- 7 Frequency Settings On Selectable DIP Switches
- 87.7MHz/87.9MHz/88.1MHz/88.3MHz/88.5MHz/88.7MHz/88.9MHz
- Input Impedance: 50k Ohm
- Channel Balance:+/- 2dB

- Maximum Channel Separation: 22dB
- Left Right Stereo RCA Female Input Jacks
- Left Right Stereo RCA Female Output Jacks
- Output Impedance: 50 Ohm
- DC 12 Volt 0.5W
- With 4 Mounting Tabs
- Dimensions: 0.90 (H) X 4.90(W) X 3.25 (L)



PLMP2A

FM Radio Transmitter with USB Port for Charging Your Devices, 3.5mm AUX Input Car Lighter Adaptor

- FM Transmitter
- USB Port for Device Charging Your Smartphone, MP3 Player, etc.
- Supports USB Flash Drive & Aux-In Function
- Supports MP3 and WMA Format Files

- Frequency range: 87.5-108.0 MHz
- LCD Display Screen
- Low Profile Design
- Connects to Car Cigarette Lighter
- Input Voltage: 12-24V - Output Power: 5V DC / 2.1A



PLMP3C1

Plug In Car MP3/USB/SD/Ipod Wireless FM Transmitter/Modulator

- FM Transmitter with 206 channels optional :87.5-108MHz;
- 1.4"Large screen display white words on black background;
- Supports USB disk & SD/MMC card;
- .Line-in function supports other devices:Ipod,mp3/4

- Supports MP3 format files;
- Supports 12-24V voltage.
- Supports folder switch & 4 loop modes
- With remote controller.



PLMP3C21

Plug In Car MP3/USB/SD/MMC/MP4/Ipod FM Modulator/Transmitter w/USB Charging Port and Remote

- FM Transmitter with 206 channels: 87.5 - 108MHz
- USB Port for Memory Stick, Play MP3s From Your Computer!
- 1.4 Display for Song Titles & Menus
- Supports SD/MMC card, USB Memory Sticks
- Powered USB Port Lets You Charge Anything w/ USB Charger

- Supports All MP3 Files
- Browse Through Folders w/ Menu Functions
- Song / Folder / Repeat Modes
- Wireless Remote Control Included
- Powered by any 12-24V Car Accessory Outlet
- Line-in function supports other devices: Ipod, MP3 Player, CD Player, Computer, Mobile Phone, Etc.



PLMP3C31B

Plug In Car MP3 USB/SD/MMC/Ipod FM Modulator/Transmitter w/USB Charging Port w/Bluetooth Hands Free Kit For All Bluetooth Phones

- Acts as a Wireless Bluetooth Kit for your Mobile Phone!
- Pair your Bluetooth Enabled Phone w/ This FM Transmitter
- Speak and Listen Completely Hands-Free
- FM Transmitter with 206 channels: 87.5 - 108MHz
- USB Port for Memory Stick, Play MP3s From Your Computer
- 1.4 Display for Song Titles & Menus
- Supports SD/MMC card, USB Memory Sticks

- Powered USB Port Lets You Charge Anything w/ USB Charger
- Supports All MP3 Files
- Browse Through Folders w/ Menu Functions
- Song / Folder / Repeat Modes
- Wireless Remote Control Included
- Powered by any 12-24V Car Accessory Plug
- Line-in function supports other devices: Ipod, MP3 Player, CD Player, Computer, Mobile Phone, Etc.



PBT50

Bluetooth Hands Free FM Radio Transmitter with USB & Micro SD Card Readers for MP3/WMA Playing, USB Charging Port & AUX Input

- Built-in Bluetooth Technology
- Built-in Microphone for Hands-Free Phone Calls
- Wirelessly Stream Audio or Internet Radio from Your Smartphone
- USB Flash and Micro SD Card Readers
- Quickly Plug-in and Play Your MP3/WMA Files
- AUX Input (3.5mm Jack) for Connecting Additional Devices
- Full Frequency FM Transmitter: 87.5-108MHz
- Hands-Free Mode Automatically Switches To Incoming Calls When Playing Music
- Supports 4 Loop Modes: Repeat All, Random, Repeat One, Folder
- Selectable EQ Settings: Natural, Rock, Pop, Classic, Jazz
- Additional USB Port For Charging Your Devices (Output: DC 5V/2.1A)
- Supports 12-24V Via Car Cigarette Lighter
- LCD Display and Button Controls
- Flexible and Adjustable Gooseneck Arm
- Includes Remote Control and 3.5mm Cable

NEW



PBT94

Bluetooth Hands Free FM Radio Transmitter with USB Flash and Micro SD Card Readers for MP3/WMA Playing, USB Charging Port & AUX Input

- Built-in Bluetooth Technology
- Built-in Microphone for Hands-Free Phone Calls
- Wirelessly Stream Audio or Internet Radio from Your Smartphone
- USB Flash and Micro SD Card Readers
- Quickly Plug-in and Play Your MP3/WMA Files
- AUX Input (3.5mm Jack) for Connecting Additional Devices
- Full Frequency FM Transmitter: 87.5-108MHz
- Hands-Free Mode Automatically Switches To Incoming Calls When Playing Music
- Supports 4 Loop Modes: Repeat All, Random, Repeat One, Folder
- Selectable EQ Settings: Natural, Rock, Pop, Classic, Jazz
- USB Port For Charging Your Devices (Output: DC 5V/2.1A)
- Supports 12-24V Via Car Cigarette Lighter
- LCD Display and Button Controls
- Flexible and Adjustable Gooseneck Arm
- Includes Remote Control and 3.5mm Cable

NEW



PLMPA35

2 Channel 300 Watt Mini Amplifier w/3.5mm Input

- 2 Channel IC Mini Amplifier with 3.5mm Input Plug
- 2 x 15 Watts RMS @ 4 Ohms/ 2 x 150 Watts Peak
- 3 way Selectable Electronic Crossover Network
- Adjustable Gain Control
- 3.5mm / 1/8" Stereo Audio Inputs
- Power Protection Circuitry
- T.H.D. 1%
- 4 Ohm Stereo Stable
- Anti-Thump Turn On
- Soft Turn On/Off
- Dc: 12-14.8 Volt
- Size: 3.94L x 2.99W x 1.4H



PMP3A2

Mobile SD/USB/MP3 Compatible Player w/ Built-In FM Transmitter

- LCD Display Screen
- Built-In wireless FM Transmitter with 206 Channel
- Frequency Capable (87.5-108MHz)
- USB/SD Card Compatible
- 3.5 AUX Input Adaptor
- Fully Adjustable Arm for Multi Angle Viewing
- Wireless Full Function Remote Control
- DC 12Volt Compatible
- Aqua color Cigarette Lighter
- Easy-to-read Display shows FM channel/Track number/Song Playing



PMP3B2



PMP3G2



PMP3R2



PSPAD25

Universal iPad, Kindle, Nexus, Astro, Galaxy Tablet eReader Device Car Mount Stand and Cup Holder Attachment with Gooseneck Arm, Adjustable/Rotating, (2) USB Ports for Charging

- 2 Channel IC Mini Amplifier with 3.5mm Input Plug
- 2 x 15 Watts RMS @ 4 Ohms/ 2 x 150 Watts Peak
- 3 way Selectable Electronic Crossover Network
- Adjustable Gain Control
- 3.5mm / 1/8" Stereo Audio Inputs
- Power Protection Circuitry
- T.H.D. 1%
- 4 Ohm Stereo Stable
- Anti-Thump Turn On
- Soft Turn On/Off
- Dc: 12-14.8 Volt
- Size: 3.94L x 2.99W x 1.4H

NEW





PLE780P

1/2 Din 7 Band Parametric Equalizer with Built-in Crossover & Subwoofer Control

- DC 12 Volt
- Half Din Dash Mount
- Output Volume Control
- Input Gain Adjustments
- Frequency Gain Control
- 7-Band Graphic Equalizer
- Fully Adjustable crossover
- Illuminated Rotary Controls

- Full System Fader Adjustment
- Mounting Hardware Included
- Built in 6 hannel 7 Volt Line Driver
- 2-Channel RCA Source & AUX Input
- Selectable Source & AUX Input Selector
- 6-Channel 7 Volt RCA Outputs (Front/Rear/Subwoofer)
- Dimensions: 7W x 4.1D x 1.10H



PLE530PAI

1/2 Din 5 Band Parametric Equalizer with Built-in Crossover & Subwoofer Control

- 5-Band Graphic Equalizer
- 6-Channel 8 Volt RCA Outputs (Front/Rear/Subwoofer)
- 2-Channel RCA Source & Front AUX Input
- Output Volume Control
- Input Gain Adjustments
- Frequency Gain Control
- Five Frequency Band with +/- 18dB Boost/Cut (45Hz, 150Hz, 400Hz, 2.5KHz, 15KHz)

- Built in 6 channel 8 Volt Line Driver
- Selectable Source & AUX Input Selector
- Full System Fader Adjustment
- Illuminated Rotary Controls
- Half Din Dash Mount
- Mounting Hardware Included
- DC 12 Volt
- Dimensions: 7W x 4.52D x 1.10H



PFA100

30 Watt Class-T Hi-Fi Stereo Amplifier with AC Adapter Included

- 12V AC/DC Adapter
- Class-T Circuit Design
- Microphone Input Jack
- Speaker Impedance: 2-
- 3.5mm iPod/MP3 Input Jack
- Signal to Noise Ratio: >80dB

- Total Output Power: 30 Watt
- Input Power: DC 9 ~ 14.4V 2A
- Total harmonic distortion: <0.4%
- Frequency response: 20Hz-20kHz
- Short Cut, Overload & Overheat Protection
- Dimensions: 6.02 x 4.96 x 1.5



PFA200

60 Watt Class-T Hi-Fi Audio Amplifier with AC Adapter Included

- 12V AC/DC Adapter
- Class-T Circuit Design
- Microphone Input Jack
- Speaker Impedance: 2-
- 3.5mm iPod/MP3 Input Jack
- Signal to Noise Ratio: >80dB

- Total Output Power: 60 Watt
- Input Power: DC 9 ~ 14.4V 2A
- Total harmonic distortion: <0.4%
- Frequency response: 20Hz-20kHz
- Short Cut, Overload & Overheat Protection
- Dimensions: 5.51 x 4.80 x 1.81



PFA300

90 Watt Class-T Hi-Fi Stereo Amplifier with AC Adapter Included

- 12V AC/DC Adapter
- Class-T Circuit Design
- Microphone Input Jack
- Speaker Impedance: 2-
- 3.5mm iPod/MP3 Input Jack
- Signal to Noise Ratio: >80dB

- Total Output Power: 90 Watt
- Input Power: DC 9 ~ 14.4V 2A
- Total harmonic distortion: <0.4%
- Frequency response: 20Hz-20kHz
- Short Cut, Overload & Overheat Protection
- Dimensions: 6.02 x 4.96 x 1.5



PFA400U

100 Watt Class-T Hi-Fi Audio Amplifier with USB Flash and SD Memory Card Readers - AC Adapter Included

- 12V AC/DC Adapter
- LCD Control Display
- USB/SD Compatibility
- Class-T Circuit Design
- Microphone Input Jack
- Speaker Impedance: 2-
- Signal to Noise Ratio: >80dB
- Total Output Power: 100 Watt

- Input Power: DC 9 ~ 14.4V 2A
- Total harmonic distortion: <0.4%
- Frequency response: 20Hz-20kHz
- Short Cut, Overload & Overheat Protection
- RCA Input can be used with iPod/MP3 Players
- Wireless Remote Control for Playback Configuration
- Dimensions: 6.97 x 4.84 x 1.69





PLA4120



PLA2200



PLA2220

PLA2200 2 Channel 1400 Watt Bridgeable Mosfet Amplifier

- 700 Watts x 2 Output
- 1400 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Switchable Bass Boost
- Power And Protection LED Indicators
- Low Level Inputs
- RCA Inputs Outputs
- Slim Size Amplifier Design For Easy Installation
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on - Soft Turn-On Circuit
- Remote Turn On/Off
- 2x10 Amp Maxi Type Fuse
- Freq. Response: 15Hz - 30KHz
- Dimensions: 10.63" H x 1.42" W x 8.75" L

PLA2210 2 Channel 1800 Watt Bridgeable Mosfet Amplifier

- 900 Watts x 2 Output
- 1800 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Switchable Bass Boost
- Power And Protection LED Indicators
- Low Level Inputs - RCA Inputs Outputs
- Slim Size Amplifier Design For Easy Installation
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on - Soft Turn-On Circuit
- Remote Turn On/Off
- S/N Ratio: 95db - T.H.D: 0.04%
- 2x15 Amp Maxi Type Fuse
- Freq. Response: 15Hz - 30KHz
- Dimensions: 10.63" H x 1.42" W x 12" L

PLA2220 2 Channel 2400 Watt Bridgeable Mosfet Amplifier

- 1200 Watts x 2 Output
- 2400 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Switchable Bass Boost
- Power And Protection LED Indicators
- Low Level Inputs - RCA Inputs Outputs
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on - Soft Turn-On Circuit
- Remote Turn On/Off
- S/N Ratio: 95db - T.H.D: 0.04%
- 2x20 Amp Maxi Type Fuse
- Dimensions: 10.63" H x 1.42" W x 15.75" L

PLA2230 2 Channel 3000 Watt High Power Mosfet Amplifier

- 1500 Watts x 2 Output
- 3000 Watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Variable Bass Boost - Sub Sonic Filter
- Thermal / Overload / Short Circuit Protection
- MOSFET PWM Power Supply
- Power And Protection LED Indicators
- Low Level Inputs - RCA Inputs And Outputs
- Slim Size Amplifier Design For Easy Installation
- 2x25 Amp Maxi Type Fuse
- Dimensions: 10.63" W x 1.42" H x 17" L

PLA2260 2 Channel 4000 Watt High Power Mosfet Amplifier

- 2000 Watts x 2 Output
- 4000 Watts x 1 Bridged Output
- Variable Hi/ Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Variable Bass Boost - Sub Sonic Filter
- Thermal/ Overload/ Short Circuit Protection
- MOSFET PWN Power Supply
- Power And Protection LED indicators
- Low Level Inputs - RCA Inputs And Outputs
- Slim Size Amplifier Design For Easy Installation
- 2x35 Amp Maxi Type Fuse
- Dimensions: 10.63" (W) x 1.42" (H) x 21" (L)

PLA4120 4 Channel 1000 Watt High Power Mosfet Amplifier

- 250 Watt x 4 Output
- 500 Watt x 2 Bridged Out (250Wx2 + 500W x 1)
- Dual Variable Hi/Lo Electronic Crossover Network
- Dual Switchable Bass Boost
- Dual MOSFET PWM Power Supplies
- Dual Variable Input Level (Gain) Control
- Thermal / Overload / Short Circuit Protection
- Power And Protection LED Indicators
- Low Level Inputs
- RCA Inputs And Outputs
- Slim Size Amplifier Design For Easy Installation
- 2x10 Amp Maxi Type Fuse
- Dimensions: 10.63" W x 1.42" H x 13" L

PLA2988

2 Ch 6000 Watts Bridgeable Mosfet Amplifier

- Maximum Power Output 2 x 3000W
- Bridgeable RMS Power @ 4 Ohms: 1 x 6000W
- 2 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB
- Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Input Impedance: 47K Ohms
- Soft Turn On/ Off
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions: 9.76W x 2.99H x 15.35L

PLA4988

4 Ch 6000 Watts Bridgeable Mosfet Amplifier

- Maximum Power Output 4 x 1500W
- Bridgeable RMS Power @ 4 Ohms: 2 x 3000 W
- 4 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB
- Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Input Impedance: 47K Ohms
- Soft Turn On/ Off
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions: 9.76 W x 2.99 H x 16.93 L





PLAM3000



PLAM1000



PLAM2001D

PLAM1000 1000 Watt 2 Channel Bridgeable Mosfet Amplifier

- Two Channel Bridgeable Amplification
- Tri-way Configuration: 1/2 Channels
- 2 X 500Watts Total Output @ 4 Ohms
- 1000 Watts Total System Output @ 4 Ohms
- MOSFET Pulse Width Modulated Power Supply

- 2 Ohm Stereo Stable - RCA Low Level Inputs
- Built-In Variable Subwoofer Crossover
- Speaker Output Terminal Strip
- Signal/Noise Ratio 90dB - THD <0.04%
- Frequency Response: 15Hz-30kHz

- Overload, Thermal & Short Circuit Protection
- LED Diagnostic Condition Indicator
- Automotive Type Fuse Protection
- Dimensions: 7.28"L 9.76"W 2.26"H

PLAM1200 1200 Watt 2 Channel Bridgeable Mosfet Amplifier

- Two Channel Bridgeable Amplification
- Tri-way Configuration: 1/2 Channels
- 2 X 600 Watts Total Output @ 4 Ohms
- 1200 Watts Total System Output @ 4 Ohms
- MOSFET Pulse Width Modulated Power Supply

- 2 Ohm Stereo Stable - RCA Low Level Inputs
- Built-In Variable Subwoofer Crossover
- Speaker Output Terminal Strip
- Signal/Noise Ratio 90dB - THD <0.04%
- Frequency Response: 15Hz-30kHz

- Overload, Thermal & Short Circuit Protection
- Power On LED Indicator - Variable Gain Control
- LED Diagnostic Condition Indicator
- Automotive Type Fuse Protection
- Dimensions: 7.87"L 9.76"W 2.26"H

PLAM1600 1600 Watt 4 Channel Bridgeable Mosfet Amplifier

- Four Channel Bridgeable Amplification
- Tri-way Configuration: 4/3/2 Channels
- 4 X 400Watts Total Output @ 4 Ohms
- 1600 Watts Total System Output @ 4 Ohms
- MOSFET Pulse Width Modulated Power Supply

- 2 Ohm Stereo Stable - RCA Low Level Inputs
- Built-In Variable Subwoofer Crossover
- Speaker Output Terminal Strip
- Signal/Noise Ratio 90dB - THD <0.04%
- Frequency Response: 15Hz-30kHz

- Overload, Thermal & Short Circuit Protection
- Power On LED Indicator - Variable Gain Control
- LED Diagnostic Condition Indicator
- Automotive Type Fuse Protection
- Dimensions: 11.02"L 9.76"W 2.26"H

PLAM2300 2300 Watt 2 Channel Bridgeable Mosfet Amplifier

- Two Channel Bridgeable Amplification
- Tri-way Configuration: 1/2 Channels
- 2 X 1150 Watts Total Output @ 4 Ohms
- 2300 Watts Total System Output @ 4 Ohms
- MOSFET Pulse Width Modulated Power Supply

- Built-In Variable Subwoofer Crossover
- 2 Ohm Stereo Stable - RCA Low Level Inputs
- Speaker Output Terminal Strip
- Signal/Noise Ratio 90dB - THD Less Than 0.04%
- Frequency Response: 15Hz-30kHz

- Overload, Thermal & Short Circuit Protection
- Power On LED Indicator - Variable Gain Control
- LED Diagnostic Condition Indicator
- Automotive Type Fuse Protection
- Dimensions: 9.84"L 9.76"W 2.26"H

PLAM3000 3000 Watt 4 Channel Bridgeable Mosfet Amplifier

- Four Channel Bridgeable Amplification
- Tri-way Configuration: 4/3/2 Channels
- 4 X 750 Watts Total Output @ 4 Ohms
- 3000 Watts Total System Output @ 4 Ohms
- MOSFET Pulse Width Modulated Power Supply

- 2 Ohm Stereo Stable - RCA Low Level Inputs
- Built-In Variable Subwoofer Crossover
- Speaker Output Terminal Strip
- Signal/Noise Ratio 90dB - THD < 0.04%
- Frequency Response: 15Hz-30kHz

- Overload, Thermal & Short Circuit Protection
- Power On LED Indicator - Variable Gain Control
- LED Diagnostic Condition Indicator
- Automotive Type Fuse Protection
- Dimensions: 14.17"L 9.76"W 2.26"H

PLAM2001D Class D Monoblock Power Amplifier

- Class D Monoblock Power Amplifier
- RMS Power @ 4 Ohms: 1x500 W
- RMS Power @ 2 Ohms: 1x800 W
- RMS Power @ 1.3 Ohms: 1x1200 W
- Maximum Power Output 2000W Mono
- Mono Block Sub woofer Amplifier
- Frequency Response 15 Hz-150 Hz (±3dB)

- Output Power @ 14.4v DC, 50Hz
- MOSFET Power Supply - 1 Ohm Stable
- PWM (Pulse-Width-Modulation) System
- Silver RCA Inputs - Glass Epoxy PCB
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Variable Subsonic Filter (15Hz - 55Hz 24dB)

- Remote Bass Boost
- Input Impedance: 10K Ohms
- Advanced Protection Circuitry
- S/N Ratio: >90dB - Soft Turn On/ Off
- Dimensions: 9.76"W x 2.28"H x 11.42"L

PLAM3601D Class D Monoblock Power Amplifier

- Class D Monoblock Power Amplifier
- RMS Power @ 4 Ohms: 1x1000 W
- RMS Power @ 2 Ohms: 1x1500 W
- RMS Power @ 1.3 Ohms: 1x2000 W
- Maximum Power Output 3600W Mono
- Mono Block Sub woofer Amplifier
- Frequency Response 15 Hz-150 Hz (±3dB)

- Output Power @ 14.4v DC, 50Hz
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB - Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Variable Subsonic Filter (15Hz - 55Hz 24dB)

- Remote Bass Boost - S/N Ratio: >90dB
- Input Impedance: 10K Ohms
- Soft Turn On/ Off - 1 Ohm Stable
- Advanced Protection Circuitry
- Dimensions: 9.76"W x 2.28"H x 13.78"L



PLA2678



PLA2378



PLA2978

PLA2378 2 Channel 2000 Watt Bridgeable Mosfet Amplifier

- Maximum Power Output 2 x 1000W
- Bridgeable RMS Power @ 4 Ohms: 1x2000W
- 2 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable - Soft Turn On/ Off
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB - Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Input Impedance: 47K Ohms
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions:10.24"W x 2.21"H x 11.02"L

PLA2678 2 Channel 4000 Watt Bridgeable Mosfet Amplifier

- Maximum Power Output 2 x 2000W
- Bridgeable RMS Power @ 4 Ohms: 1x4000W
- 2 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable - Soft Turn On/ Off
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB
- Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Input Impedance: 47K Ohms
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions:10.24"W x 2.21"H x 16.14"L

PLA2978 2 Channel 5000 Watt Bridgeable Mosfet Amplifier

- Maximum Power Output 2 x 2500W
- Bridgeable RMS Power @ 4 Ohms: 1 x 5000 W
- 2 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable - Soft Turn On/ Off
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB - Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Input Impedance: 47K Ohms
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions:10.24"W x 2.21"H x 18.90"L

PLA4278 4 Channel 2000 Watt Bridgeable Mosfet Amplifier

- Maximum Power Output 4 x 500W
- Bridgeable RMS Power @ 4 Ohms: 2 x 1000W
- 4 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable - Soft Turn On/ Off
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB - Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Input Impedance: 47K Ohms
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions:10.24"W x 2.21"H x 14.58"L

PLA4478 4 Channel 4000 Watt Bridgeable Mosfet Amplifier

- Maximum Power Output 4 x 1000W
- Bridgeable RMS Power @ 4 Ohms: 2 x 2000W
- 4 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable - Soft Turn On/ Off
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB - Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Advanced Protection Circuitry
- Dimensions:10.24"W x 2.21"H x 17.72"L

PDGA440 2000 Watt 4-Channel SMD Class AB Power Amplifier

- 4 x 250 Watts RMS Power at 4 Ohms
- 4 x 500 Watts Peak Power at 4 Ohms
- 2 x 500 Watts RMS Power at 4 Ohms Bridged
- 2 x 1,000 Watts Peak Power at 4 Ohms Bridged
- Variable Low Pass Filter : 50Hz - 500Hz
- Variable High Pass Filter : 50Hz - 500Hz
- Input Sensitivity: 250mV-8V
- THD :<0.05%
- S/N Ratio : >90dB
- Channel Separation : >60dB
- Frequency Response : 20Hz - 50KHz
- High Technology SMD Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Tri-mode Capable
- Double Side Epoxy PCB Circuit Board
- Nickel Plated RCA Inputs
- Low Pass Filter Controls
- High Pass Filter Controls
- Power & Protection LED Indicator
- Thermal, Over load & Speaker Short Protection
- Soft Turn-on/Turn-Off
- Fuse Rating: 30A x 1
- Dimensions: 6.88(W) x 2.02(H) x 7.17(L)

PDGA240 1000 Watt 2-Channel SMD Class-AB Power Amplifier

- 2 x 250 Watts RMS Power at 4 Ohms
- 2 x 500 Watts Peak Power at 4 Ohm
- 1 x 500 Watts RMS Power at 4 Ohm Bridged
- 1 x 1,000 Watts Peak Power at 4 Ohm Bridged
- Variable Low Pass Filter : 50Hz - 500Hz
- Variable High Pass Filter : 50Hz - 500Hz
- Input Sensitivity: 250mV-8V
- THD :<0.05%
- S/N Ratio : >90dB
- Channel Separation : >60dB
- Frequency Response : 20Hz - 50KHz
- High Technology SMD Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Double Side Epoxy PCB Circuit Board
- Nickel Plated RCA Inputs
- Low Pass Filter Controls
- High Pass Filter Controls
- Power & Protection LED Indicator
- Thermal, Over load & Speaker Short Protection
- Soft Turn-on/Turn-Off
- Fuse Rating: 20A x 1
- Dimensions: 6.89"(W) x 2.02"(H) 5.59"(L)





PLBA530FRD



PLBA330FRD



PLBA430FRD



PLBA330FRD

4400 Watt 3-Channel Compact Class-D Full Range Hybrid Amplifier

- 2 x 300 Watt + 1 x 800 Watts RMS @ 4 Ohms
- 2 x 600 Watt + 1 x 1600 Watts MAX @ 4 Ohms
- 2 x 450 Watt + 1 x 1200 Watts RMS @ 2 Ohms
- 2 x 1200 Watt + 1 x 2000 Watts MAX @ 2 Ohms
- High Glossy Black Brushed accents Heat Sink
- New Compact Design Based Class-D
- Double Sided SMT Circuit Board

- 2 Ohms Stereo Stable
- LPF Variable Crossover : 30Hz-200Hz 24dB/Oct
- HPF Variable Crossover : 50Hz-180Hz 12dB/Oct
- Variable Bass Boost Frequency : 40Hz-100Hz dB(Variable)
- Variable Bass Boost:0-18dB - Soft Turn On/Off
- Phase Adjustable : 0° - 180°

- Dash Mount Remote Subwoofer Control
- Nickel Plated Low Level RCA Input
- Power Protection LED Indicators
- Advanced Protection Circuitry
- Frequency Response : 10 – 40K Hz
- S/N Ratio > 95 dB - Fuse : 25A x 2
- Dimension : 8.78"(L) x 7.40"(W) x 1.99"(H)

PLBA430FRD

3600 Watt 4-Channel Compact Class-D Full Range Amplifier

- 4 x 300 Watts RMS @ 4 Ohms
- 4 x 600 Watts MAX @ 4 Ohms
- 4 x 450 Watts RMS @ 2 Ohms
- 4 x 900 Watts MAX @ 2 Ohms
- High Glossy Black Brushed accents Heat Sink
- New Compact Design Based on Class-D Tech

- Double Sided SMT Circuit Board
- 2 Ohms Stereo Stable - Soft Turn On/Off
- LPF Variable Crossover : 30Hz-200Hz 24dB/Oct
- HPF Variable Crossover : 50Hz-180Hz 12dB/Oct
- Variable Bass Boost : 0-18 dB at40Hz
- Phase Adjustable : 0° - 180°

- Nickel Plated Low Level RCA Input
- Power Protection LED Indicators
- Advanced Protection Circuitry
- Frequency Response : 10 – 40K Hz
- S/N Ratio > 95 dB - Fuse : 25A x 2
- Dimension : 7.20"(L) x 7.40"(W) x 1.99"(H)

PLBA530FRD

6800 Watt 5-Channel Compact Class-D Full Range Hybrid Amplifier

- 4 x 300 Watt + 1 x 800 Watts RMS @ 4 Ohms
- 4 x 600 Watt + 1 x 1600 Watts MAX @ 4 Ohms
- 4 x 450 Watt + 1 x 1200 Watts RMS @ 2 Ohms
- 4 x 1200 Watt + 1 x 2000 Watts MAX @ 2 Ohms
- High Glossy Black Brushed accents Heat Sink
- New Compact Design Based on Class-D Tech
- Double Sided SMT Circuit Board

- 2 Ohms Stereo Stable - Soft Turn On/Off
- LPF Variable Crossover : 30Hz-200Hz 24dB/Oct
- HPF Variable Crossover : 50Hz-180Hz 12dB/Oct
- Variable Bass Boost Frequency : 40Hz-100Hz(Variable)
- Variable Bass Boost : 0-18 dB
- Phase Adjustable : 0° - 180°

- Dash Mount Remote Subwoofer Control
- Nickel Plated Low Level RCA Input
- Power Protection LED Indicators
- Advanced Protection Circuitry
- Frequency Response : 10 – 40K Hz
- S/N Ratio > 95 dB - Fuse : 25A x 3
- Dimension : 12.72"(L) x 7.40"(W) x 1.99"(H)



PLTA580



PLTA180



PLTA180

2-Channel 800 Watt 24 Volt Truck, Bus RV, Bridgeable Mosfet Amplifier

- 2 x 200W RMS at 4 Ohms
- 2 x 400W MAX at 4 Ohms
- 1 x 800W MAX at 4 Ohms Bridged
- 2 ohm Stereo Stable
- Line Out for Left & Right Channel
- Tri-mode operation, Bridgeable
- Nickel-plated RCA connectors & Screw terminals
- Thermal, Over load & Speaker short protection

- Air Induction FAN Cooled
- Power & Protection LED Indicators
- Soft Turn-on/Turn-off
- Channels/Class: 2ch. Class A/B
- Input Sensitivity: 100mV-4V
- THD 4ohm Power 0.04%
- Frequency Response: 10Hz-30KHz
- S/N Ratio (4 ohm) : 90dB

- Stereo Separation: 65dB
- Sub Sonic Filter : 20Hz fixed
- Variable HPF: 50Hz~700Hz
- Variable LPF: 50Hz~150Hz
- Bass Boost: 0-18dB (60Hz fixed)
- DC 24-28 Voltage Input
- Fuse Rating: 15Ax4
- Dimensions : 11.42"(W) x 3.15"(H) x 15.74"(L)

PLTA580

2-Channel 2000 Watt 24 Volt Truck, Bus RV, Bridgeable Mosfet Amplifier

- 2 x 500W RMS at 4 Ohms
- 2 x 1000W MAX at 4 Ohms
- 1 x 2000W MAX at 4 Ohms Bridged
- 2 ohm Stereo Stable
- Line Out for Left & Right Channel
- Tri-mode operation, Bridgeable
- Nickel-plated RCA connectors & Screw terminals
- Thermal, Over load & Speaker short protection

- Air Induction FAN Cooled
- Power & Protection LED Indicators
- Soft Turn-on/Turn-off
- Channels/Class: 2ch. Class A/B
- Input Sensitivity: 100mV-4V
- THD 4ohm Power 0.04%
- Frequency Response: 10Hz-30KHz
- S/N Ratio (4 ohm) : 90dB

- Stereo Separation: 65dB
- Sub Sonic Filter : 20Hz fixed
- Variable HPF: 50Hz~700Hz
- Variable LPF: 50Hz~150Hz
- Bass Boost: 0-18dB (60Hz fixed)
- DC 24-28 Voltage Input
- Fuse Rating: 25Ax4
- Dimensions : 11.42"(W) x 3.15"(H) x 21.65"(L)

Super Slim Active Amplified Subwoofer Systems

PLBASS2.8

- RCA Low Level Input
- High Level Input
- Green & Red LED Power Status Indicator
- Phase shift Switch: 0 or 180°
- Soft delay remote Turn-On
- Thermal, Short And Overload Protection
- Fuse: 2—15A
- RMS Power: 150W x 2 + 300W x 1
- MXA Power: 300W x 2 + 600W x 1
- Subwoofer Gain Control
- Subsonic Filter (20-50Hz)
- 0 to +12dB Variable Bass Boost (@45Hz)
- Low Pass Filter (50-150 Hz)
- Subwoofer Remote Control
- CH 1/2 Gain Control
- High Pass Filter (50-150 Hz)
- Dimensions: 14.5(L) x 9.5(W) x 3(H)

PLBASS8

- Low Level RCA Input
- High Level Speaker Line Input
- Green LED Power Status Indicator
- Red LED Protection Status Indicator
- Remote Bass Boost Level Control
- Phase Shift Switch: 0 or 180°
- Adjustable Input Sensitivity: 0.2V-3V
- 0 to +12dB Variable Bass Boost (@45Hz)
- Low Pass Filter (50-150 Hz)
- Remote Turn-On Soft Start/Stop Delay
- Thermal, and Overload Protection Circuits
- Fuse: 2 x 15A
- Max Power: 600 Watt
- RMS Power: 300 Watt
- Dimension: 14. 5(D) x 9.5(W) x 3(H)
- Weight 10.5 Lbs

PLBASS10

- 10 Slim Woofer
- RCA Low Level Input
- High Level Input
- Green & Red LED Power Status Indicator
- Remote Level Control
- Phase Shift Switch: 0 or 180°
- Adjustable Input Sensitivity: 0.2V-3V
- 0 to +12dB Variable Bass Boost (@45Hz)
- Low Pass Filter (50-150 Hz)
- Soft Delay Remote Turn-On
- Thermal, Short And Overload Protection
- Fuse: 2 x 20A
- Max Power: 1000 Watts
- RMS Power: Amplifier: 100Watt
- Slim woofer: 250Watt
- Dimension: 15 X 11.8 X 3
- Weight: 15.5 LBS.



PLPW6D



PLPW6D

6.5" 600 Watt Dual Voice Coil 4 Ohm Subwoofer

- Black Steel Basket
- Non-Press Paper Cone
- Specially Treated Foam Surround
- 1.5 4 Layer Dual Voice Coil
- Dual 4 Ohm Impedance

- 30 OZ Magnet
- 300 Watts RMS / 600 Watts Max Power
- SPL: 89 dB
- Spring Loaded Push Down Speaker Terminals
- Dimensions: 6.6 (Diameter) x 2.9 (Depth)

PLPW8D

8" 800 Watt Dual Voice Coil 4 Ohm Subwoofer

- SPL: 89dB
- 40 Oz. Magnet
- Black Steel Basket
- Non-Press Paper Cone
- Dual 4 Ohm Impedance

- 1.5" 4-Layer Dual Voice Coil
- Specially Treated Foam Surround
- 400 Watt RMS / 800 Watt Max Power
- Spring Loaded Push Down Speaker Terminals
- Dimensions: 8.2" (Diameter) x 3.7" (Depth)

PLPW10D

10" 1000 Watt Dual Voice Coil 4 Ohm Subwoofer

- SPL: 90dB
- 50 oz. Magnet
- Black Steel Basket
- Non-Press Paper Cone
- Dual 4 Ohm Impedance

- 2-Inch 4-Layer Dual Voice Coil
- Specially Treated Foam Surround
- 500 Watt RMS / 1,000 Watt Max Power
- Spring Loaded Push Down Speaker Terminals
- Dimensions: 10" (Diameter) x 4.7" (Depth)

PLPW12D

12" 1600 Watt Dual Voice Coil 4 Ohm Subwoofer

- SPL: 90dB
- 60 oz. Magnet
- Black Steel Basket
- Non-Press Paper Cone
- Dual 4 Ohm Impedance

- 2-Inch 4-Layer Dual Voice Coil
- Specially Treated Foam Surround
- 800 Watt RMS / 1,600 Watt Max Power
- Spring Loaded Push Down Speaker Terminals
- Dimensions: 12.2" (Diameter) x 5.1" (Depth)

PLPW15D

15" 2000 Watt Dual Voice Coil 4 Ohm Subwoofer

- SPL: 92dB
- 95 oz. Magnet
- Black Steel Basket
- Non-Press Paper Cone
- Dual 4 Ohm Impedance

- 2.5-Inch 4-Layer Dual Voice Coil
- Specially Treated Foam Surround
- 1,000 Watt RMS / 2,000 Watt Max Power
- Spring Loaded Push Down Speaker Terminals
- Dimensions: 15.3" (Diameter) x 6.3" (Depth)



PLSQ10D

10" 1200 Watt Square DVC Subwoofer

- Silver Special Treated Polypropylene Cone
- Wide Rubber Surround
- Black Square Steel Basket
- Bumped Vented Extended Pole Piece
- 2.5 High Temperature Kapton Dual Voice Coil
- 4 Ohm Impedance (Per Coil)
- 70 + 70 oz. Magnet Structure
- SPL: 88 dB
- 1200 Watts Peak Power
- Overall Diameter: 11.81
- Mounting Depth: 5.91

PLSQ12D

12" 1400 Watt Square DVC Subwoofer

- Silver Special Treated Polypropylene Cone
- Wide Rubber Surround
- Black Square Steel Basket
- Bumped Vented Extended Pole Piece
- 3 High Temperature Kapton Dual Voice Coil
- 4 Ohm Impedance (Per Coil)
- 70 + 70 oz. Magnet Structure
- Fs:26, Qms:5.81, Qes:0.90,
- Qts:0.7, Vas (Cu ft)4.146
- 1400 Watts Peak Power - SPL: 90 dB
- Overall Diameter: 13 - Mounting Depth: 6.34



PLW10BL

10" 600 Watt Subwoofer

- Blue CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Red steel Basket
- Bumped Vented Extended Pole Piece
- 1.5 High Temperature Kapton Voice Coil
- 4 Ohms Impedance
- 70 oz. Magnet Structure
- 600 Watts Peak Power
- Fs:35.9, Qms:5.72, Qes:0.83
- Qts:0.73, Vas (Cu ft)1.932
- SPL: 86.7dB
- Overall Diameter: 10.16
- Mounting Depth: 4.45

PLW12BL

12" 800 Watt Subwoofer

- Blue CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Blue steel Basket
- Bumped Vented Extended Pole Piece
- 2 High Temperature Kapton Voice Coil
- 4 Ohms Impedance
- 90 oz. Magnet Structure
- 800 Watts Peak Power
- Fs:26.2, Qms:5.81, Qes:0.90
- Qts:0.78, Vas (Cu ft)4.146
- SPL: 85.5dB
- Overall Diameter: 12.20
- Mounting Depth: 5.34

PLW15BL

15" 100 Watt Subwoofer

- Blue CD Wave Electro-Plated Polypropylene Cone
- Wide Butyl Rubber Surround with New Pattern
- Blue Steel Basket
- Bumped & Vented Extended Pole Piece
- 2.5" High Temperature Kapton Voice Coil
- 4 Ohm Impedance
- 70 Oz Magnet structure
- 1000 Watts Peak Power



PLW10RD

10" 600 Watt Subwoofer

- CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Red steel Basket
- Bumped Vented Extended Pole Piece
- 1.5 High Temperature Kapton Voice Coil
- 4 Ohms Impedance - SPL: 86.7dB
- 70 oz. Magnet Structure
- 600 Watts Peak Power
- Fs:35.9, Qms:5.72, Qes:0.83,
- Qts:0.73, Vas (Cu ft)1.932
- Overall Diameter: 10.16
- Mounting Depth: 4.45

PLW12RD

12" 800 Watt Subwoofer

- Red CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Red steel Basket
- Bumped Vented Extended Pole Piece
- 2 High Temperature Kapton Voice Coil
- 4 Ohms Impedance
- 90 oz. Magnet Structure
- 800 Watts Peak Power
- Fs:26.2, Qms:5.81, Qes:0.90
- Qts:0.78, Vas (Cu ft)4.146
- SPL: 85.5dB
- Overall Diameter: 12.20
- Mounting Depth: 5.08

PLW15RD

15" Red Cone High Woofer

- Red CD wave Electro-Plated Cone
- Wide Butyl Rubber Surround with New Pattern
- Red Steel Basket
- Bumped & Vented Extended Pole Piece
- 2.5" High Temperature Kapton Voice Coil
- 4 Ohm Impedance
- 70 Oz Magnet Structure
- 1000 Watts Peak Power



PLCHW10

10" 1400 Watt DVC Subwoofer

- Titanium Injected Polypropylene Cone
- Non-Fatiguing Big Rubber Suspension
- Chrome-Plated Dome Steel Basket
- Magnet Sealed Within Basket
- Allen Key Magnet Bolts
- 2" Dual Kapton Voice Coil
- 1400 Watts Peak Power
- Impedance: Dual 4 Ohm
- 50 + 50 oz. Magnet Structure
- Fs:26.9, Qms:5.23, Qes:0.89,
- Qts:0.76, Vas (Cu ft)2.394 - SPL: 83.5 dB
- Diameter: 10.16 - Mounting Depth: 6.20

PLCHW12

12" 2400 Watt DVC Subwoofer

- Titanium Injected Polypropylene Cone
- Non-Fatiguing Big Rubber Suspension
- Chrome-Plated Dome Steel Basket
- Magnet Sealed Within Basket
- Allen Key Magnet Bolts
- 2" Dual Kapton Voice Coil
- 2400 Watts Peak Power
- Impedance: Dual 4 Ohm
- 60 + 60 oz. Magnet Structure
- Fs:23.2, Qms:4.92, Qes:0.84,
- Qts:0.72, Vas (Cu ft)4.908 - SPL: 85 dB
- Diameter: 12.60 - Mounting Depth: 6.60

PLCHW15

15" 3600 Watt DVC Subwoofer

- Titanium Injected Polypropylene Cone
- Non-Fatiguing Big Rubber Suspension
- Chrome-Plated Dome Steel Basket
- Magnet Sealed Within Basket
- Allen Key Magnet Bolts
- 2.5" Dual Kapton Voice Coil
- 3600 Watts Peak Power
- Impedance: Dual 4 Ohm
- 70 + 70 oz. Magnet Structure
- Fs:21.2, Qms:5.0, Qes:0.90,
- Qts:0.75, Vas (Cu ft)5.204 - SPL: 84 dB
- Diameter: 15.84 - Mounting Depth: 8.52

PLWCH10D

10" 1000 Watt Ultra Slim DVC Subwoofer

- 10 High Quality Poly Mica Cone
- Butyl Foam Surround
- Dual 2 High Temperature Kapton Voice Coil
- Independently Fused 20 Amp Speaker Terminals
- 60 Oz Magnet Structure
- Power Handling: 500Watts RMS/1000 Watts Peak
- Frequency Response: 30 Hz - 2.2K Hz
- Impedance (Per coil) : 4 Ohm
- Fs:31.7, Qms:4.07, Qes:0.46, Qts:0.41, Vas (L)49.69
- Efficiency: 90 dB
- Overall Diameter: 10.6
- Mounting Depth: 3.08
- Includes Installation Template

PLWCH12D

12" 1200 Watt Ultra Slim DVC Subwoofer

- 12 High Quality Poly Mica Cone
- Butyl Foam Surround
- Dual 2.5 High Temperature Kapton Voice Coil
- Independently Fused 20 Amp Speaker Terminals
- 75 Oz Magnet Structure
- Power Handling: 600Watts RMS/1200 Watts Peak
- Frequency Response:28 Hz - 2.2K Hz
- Impedance (Per coil) : 4 Ohm
- Fs:29.1, Qms:4.08, Qes:0.44, Qts:0.396, Vas (L)102.18
- Efficiency: 92 dB
- Overall Diameter: 12.6
- Mounting Depth: 3.28
- Includes Installation Template



PL1090BL

10 1000 Watt DVC Subwoofer



- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 83.5dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x70 oz
- 1000 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs:26.9, Qms:5.23, Qes:0.89, Qts:0.76, Vas (Cu ft)2.394
- Overall Diameter: 10.16 - Mounting Depth: 6.20


PL1590BL

15 1400 Watt DVC Subwoofer

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 84dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2.5 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x90 oz
- 1400 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs:21.2, Qms:5.0, Qes:0.90, Qts:0.75, Vas (Cu ft)5.204
- Overall Diameter: 15.84 - Mounting Depth: 8.52

PL1290BL

12 1200 Watt DVC Subwoofer

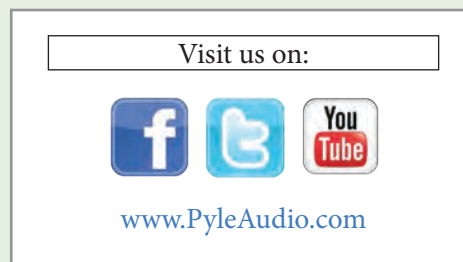

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 85dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2.5 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x90 oz
- 1200 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs:23.2, Qms:4.92, Qes:0.84, Qts:0.72, Vas (Cu ft)4.908
- Overall Diameter: 12.20 - Mounting Depth: 6.52

PL1890BL

18 1800 Watt DVC Subwoofer

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 86dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 3 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x100 oz
- 1800 Watt Max Power Handling
- Impedance:4 Ohm (Per Coil)
- Fs:20, Qms:4.8, Qes:1.2, Qts:0.70, Vas (Cu ft)6.025
- Overall Diameter: 18.32 - Mounting Depth: 8.80

PLD12WD

12 3200 Watt DVC Subwoofer

- Custom Titanium Moulded Poly Cone
- Custom Grooved Specially Treated Rubber Surround
- Diamond Cut Aluminum Die-Cast Basket
- Dual Stacked Magnet Structure
- Chrome Mesh Magnet Vent
- 2 4 Layer Dual Voice Coil
- Moulded Plastic Gasket
- Spring Loaded Wire Connectors
- 3200 Watts Peak Power
- Magnet Weight: 2 x 100 oz.
- Nominal Impedance: Dual 4 Ohms
- Fs:25, Qms:2.68, Qes:0.90, Qts:0.68, Vas (Cu ft)2.730
- SPL: 92 dB
- Overall Diameter: 13.20
- Mounting Depth: 5.20

PLD15WD

15 4000 Watt DVC Subwoofer

- Custom Titanium Moulded Poly Cone
- Custom Grooved Specially Treated Rubber Surround
- Diamond Cut Aluminum Die-Cast Basket
- Dual Stacked Magnet Structure
- Chrome Mesh Magnet Vent
- 2 5 4 Layer Dual Voice Coil
- Moulded Plastic Gasket
- Spring Loaded Wire Connectors
- 4000 Watts Peak Power
- Magnet Weight: 2 x 100 oz.
- Nominal Impedance: Dual 4 Ohms
- Fs:20, Qms:5.03, Qes:0.89, Qts:0.66, Vas (Cu ft)8.689
- SPL: 92 dB
- Overall Diameter: 16
- Mounting Depth: 6.40





PLBW84

8" 600 Watt DVC Subwoofer

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 83.5dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 1.5 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 60 oz
- 600 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs: 60, Qms: 5.23, Qes: 0.89,
- Qts: 0.76, Vas (Cu ft) 2.394
- Overall Diameter: 8.8 - Mounting Depth: 4.28

PLBW124

12" 1200 Watt DVC Subwoofer

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 84dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 70 oz
- 1200 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs: 40, Qms: 5.0, Qes: 0.90,
- Qts: 0.75, Vas (Cu ft) 5.204
- Overall Diameter: 12.8 - Mounting Depth: 5.76

PLBW104


10" 1000 Watt DVC Subwoofer

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 85dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 70 oz
- 1000 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs: 50, Qms: 4.92, Qes: 0.84,
- Qts: 0.72, Vas (Cu ft) 4.908
- Overall Diameter: 10.6 - Mounting Depth: 5.12

PLBW154

15" 1500 Watt DVC Subwoofer

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 86dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2.5 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 80 oz
- 1500 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs: 30, Qms: 5.0, Qes: 0.91, Qts: 0.70, Vas (Cu ft) 5.100
- Overall Diameter: 15.8 - Mounting Depth: 6.84

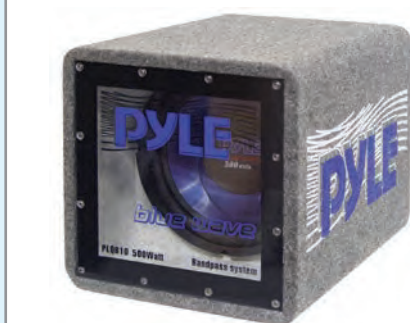

PLQB8

8" 400 Watt Bandpass Enclosure

- One 8 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 400 Watts Max Power Handling
- Frequency Response: 35Hz-800k Hz
- Dimensions: 10H x 10W x 17D

PLQB10

10" 500 Watt Bandpass Enclosure

- One 10 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 500 Watts Max Power Handling
- Frequency Response: 30Hz-700k Hz
- Dimensions: 12H x 12W x 17D

PLQB12

12" 600 Watt Bandpass Enclosure

- One 12 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 600 Watts Max Power Handling
- Frequency Response: 25Hz-600k Hz
- Dimensions: 14H x 14W x 17D



PLPR10A

10" Slim Design Powered Enclosure

- 10 High Power Subwoofer
- Black Poly Coated Cone
- 1.5 Voice Coil
- Vinyl Wrapped Amplified Enclosure
- 30 Oz Magnet Structure
- 4 Ohm Impedance
- 150 Watts RMS / 300 Watts Peak
- Frequency Response: 40Hz-400hz
- SPL: 90dB
- RCA/Speaker Line Input
- Dimensions: 16.8W x 13.6H x 10.8D

PLPR12A

12" Slim Design Powered Enclosure

- 12 High Power Subwoofer
- Black Poly Coated Cone
- 2 Voice Coil
- Vinyl Wrapped Amplified Enclosure
- 40 Oz Magnet Structure
- 4 Ohm Impedance
- 200 Watts RMS / 400 Watts Peak
- Frequency Response: 30Hz-300hz
- SPL: 91dB
- RCA/Speaker Line Input
- Dimensions: 19.2W x 15.6H x 11.2D



PLPR210A

Dual 10" Slim Design Enclosure

- Dual 10 High Power Subwoofer
- Black Poly Coated Cone
- 1.5 Voice Coil
- Vinyl Wrapped Amplified Enclosure
- 30 Oz Magnet Structure
- 4 Ohm Impedance
- 300 Watts RMS / 600 Watts Peak
- Frequency Response: 40Hz-400hz
- SPL: 90dB
- RCA/Speaker Line Input
- Dimensions: 28.8W x 13.6H x 10.8D

PLPR212A

Dual 12" Slim Design Enclosure

- Dual 12 High Power Subwoofer
- Black Poly Coated Cone
- 2 Voice Coil
- Vinyl Wrapped Amplified Enclosure
- 40 Oz Magnet Structure
- 4 Ohm Impedance
- 400 Watts RMS / 800 Watts Peak
- Frequency Response: 30Hz-300hz
- SPL: 91dB
- RCA/Speaker Line Input
- Dimensions: 33.2W x 15.6H x 11.2D



PLTA8N

8" 250 Watt Amplified Subwoofer Tube

- One 8 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Silver Electroplated Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 1.5 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Vinyl Wrapped Construction
- 250 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions: 10.4"H x 20"W x 9.6"D

PLTA10N

10" 500 Watt Amplified Subwoofer Tube

- One 10 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Silver Electroplated Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 1.5 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Vinyl Wrapped Construction
- 500 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions: 12"H x 19.8"W x 12"D

PLTA12N

12" 800 Watt Amplified Subwoofer Tube

- One 12 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Silver Electroplated Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Vinyl Wrapped Construction
- 800 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions: 15.4"H x 22.8"W x 13.8"D



PLTAB8

8" 250 Watt Amplified Tube

- One 8 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Blue Polypropylene Cone
- Treated Black Rubber Edge Suspension
- 1.5 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- 250 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions: 10.4"H x 20"W x 9.6"D

PLTAB10

10" 500 Watt Amplified Tube

- One 10 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Blue Polypropylene Cone
- Treated Black Rubber Edge Suspension
- 1.5 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- 500 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions: 12"H x 19.8"W x 12"D

PLTAB12

12" 800 Watt Amplified Tube

- One 12 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Blue Polypropylene Cone
- Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- 800 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions: 15.4"H x 22.8"W x 13.8"D



PLTB8

8" 400 Watt Carpeted Subwoofer Tube

- One 8 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 400 Watts Max Power Handling
- Frequency Response: 30Hz-700k Hz
- Dimensions: 11.5 Diam. x 19.5 Length

PLTB10

10" 500 Watt Carpeted Subwoofer Tube

- One 10 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 500 Watts Max Power Handling
- Frequency Response: 30Hz-700Hz
- Dimensions: 13.6 Diam. x 19.5 Length

PLTB12

12" 600 Watt Carpeted Subwoofer Tube

- One 12 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 600 Watts Max Power Handling
- Frequency Response: 25Hz-600k Hz
- Dimensions: 16.8 Diam. x 19.5 Length

PLSQBS102

Dual 10 1000 Watts Subwoofer Enclosure

- Dual Square 10 High Power Subwoofer System
- 3 Aluminum Voice Coil
- 4 Ohm Subwoofer
- PP Cone With Large Rubber Edge
- Rear Vent Design
- 1000 Watts Max Power
- Dimension: 14H x 28w x 14D

PLSQBS122

Dual 12 2000 Watts Subwoofer Enclosure

- Dual Square 12 High Power Subwoofer System
- 3 Aluminum Voice Coil
- 4 Ohm Subwoofer
- PP Cone With Large Rubber Edge
- Rear Vent Design
- 2000 Watts Max Power
- Dimension: 16 H x 32w x 16D





PLBS10

10 400 Watt Bandpass Subwoofer

- One 10 High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Blue LED Lights
- Rear Vented Design
- 400 Watts Max Power Handling
- Dimensions: 13.6W x 12.2H x 12.8D

PLBS12

12 500 Watt Bandpass Subwoofer

- One 12 High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Blue LED Lights
- Rear Vented Design
- 500 Watts Max Power Handling
- Dimensions: 15.6W x 14.2H x 14D



PLBS102

Dual 10 800 Watt Bass Box

- Two 10 High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Rear Vented Design
- Blue LED Lights
- 800 Watts Max Power Handling
- Dimensions: 26W x 12.2H x 12.8D

PLBS122

Dual 12 1000 Watt Bass Box

- Two 12 High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Rear Vented Design
- Blue LED Lights
- 1000 Watts Max Power Handling
- Dimensions: 30W x 14.2H x 14D



PLPPS110

Single 10 Slim Design

Forward Firing Vented Enclosure

- 10 High Power Subwoofer
- Black Molded Polypropylene Cone
- 2 Voice Coil
- Forward Firing Slot Port
- 4 Ohm Impedance
- 200 Watts RMS / 400 Watts Peak
- Frequency Response: 40Hz-4KHz
- SPL: 90dB
- Dimensions: 18W x 14H x 13.6D

PLPPS112

Single 12 Slim Design

Forward Firing Vented Enclosure

- 12 High Power Subwoofer
- Black Molded Polypropylene Cone
- 2 Voice Coil
- Forward Firing Slot Port
- 4 Ohm Impedance
- 250 Watts RMS / 500 Watts Peak
- Frequency Response: 30Hz-3KHz
- SPL: 91dB
- Dimensions: 20W x 15.6H x 14.4D



PLPPS210

Dual 10 Slim Design Forward Firing Vented Enclosure System

- Dual 10 High Power Subwoofers
- Black Molded Polypropylene Cone
- Quick Connect Speaker Terminals
- 2 Voice Coil
- Forward Firing Slot Port
- 4 Ohm Impedance
- 400 Watts RMS / 800 Watts Peak
- Frequency Response: 40Hz-4KHz
- Magnet Weight: 30 oz.
- SPL: 90dB
- Dimensions: 30.4W x 14H x 13.6D

PLPPS212

Dual 12 Slim Design Forward Firing Vented Enclosure System

- Dual 12 High Power Subwoofer
- Black Molded Polypropylene Cone
- Quick Connect Speaker Terminals
- 2 Voice Coil
- Forward Firing Slot Port
- 4 Ohm Impedance
- 500 Watts RMS / 1,000 Watts Peak
- Frequency Response: 30Hz-3KHz
- Magnet Weight: 40 oz.
- SPL: 91dB
- Dimensions: 32.4W x 15.6H x 14.4D



PL110SS

Single 10 Slim Designed Subwoofer Bass Box Enclosure System

- 10 High Power 4 Ohm Subwoofer
- Black Flame PP Cone with Foam Edge
- 2.0 Aluminum Voice Coil
- Rear Vented Design
- 1200 Watts MAX Power Handling
- Dimension: 19W x 13H x 1.2D

PL112SS

Single 10 Slim Designed Subwoofer Bass Box Enclosure System

- 10 High Power 4 Ohm Subwoofer
- Black Flame PP Cone with Foam Edge
- 2.0 Aluminum Voice Coil
- Rear Vented Design
- 1200 Watts MAX Power Handling
- Dimension: 19W x 13H x 1.2D



PL210DS

Dual 10" Slim Designed Bass Box Enclosure System

- Double 10 High Power 4 Ohm Subwoofer
- Black Flame PP Cone with Foam Edge
- 1.5 Aluminum Voice Coil
- Rear Vented Design
- 2400 Watts MAX Power Handling
- Dimension: 29.8W x 13H x 11.2D

PL212DS

Dual 12" Slim Designed Subwoofer Bass Box Enclosure System

- Double 12 High Power 4 Ohm Subwoofer
- Black Flame PP Cone with Foam Edge
- 2.0 Aluminum Voice Coil
- Rear Vented Design
- 3000 Watts MAX Power Handling
- Dimension: 34W x 15H x 12D



PL310TS

Triple 10" Slim Designed Subwoofer Bass Box Enclosure System

- Three 10 High Power 4 Ohm Subwoofer
- Black Flame PP Cone with Foam Edge
- 2.0 Aluminum Voice Coil
- Rear Vented Design
- 3600 Watts MAX Power Handling
- Dimension: 41W x 13H x 1.2D



PLHB8

Dual 8" 600 Watt Hatchback Enclosure

- Two 8 High Power 4 Ohm Subwoofer
- Non-Press Paper Cone with Rubber Edge
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Two 2 x 5 Piezo Tweeters
- Vented Design
- Two Handles for Easy Portability
- 600 Watts Max Power Handling
- Frequency Response: 35Hz-20k Hz
- 2 Tuned Ports
- Dimensions: 12.25H x 28.25W x 12.25D

PLHB10

Dual 10" 800 Watt Hatchback Enclosure

- Two 10 High Power 4 Ohm Subwoofer
- Non-Press Paper Cone with Rubber Edge
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Two 2 x 5 Piezo Tweeters
- Vented Design
- Two Handles for Easy Portability
- 800 Watts Max Power Handling
- Frequency Response: 25Hz-20k Hz
- 2 Tuned Ports
- Dimensions: 14.25H x 32.5W x 14.25D

PLHB12

Dual 12" 1000 Watt Hatchback Enclosure

- Two 12 High Power 4 Ohm Subwoofer
- Non-Press Paper Cone with Rubber Edge
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Two 2 x 5 Piezo Tweeters
- Vented Design
- Two Handles for Easy Portability
- 1000 Watts Max Power Handling
- Frequency Response: 25Hz-20k Hz
- 2 Tuned Ports
- Dimensions: 16.5H x 36W x 16.5D



PLBWS210

Dual 10" 1000 Watt Bandpass with Neon Woofer Rings

- Two 10 High Power 4 Ohm Subwoofer
- Silver Polypropylene Cone
- 2 Aluminum Voice Coil
- Specially Treated Black Rubber Edge Suspension
- Blue Neon Speaker Ring
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 2 Tuned Ports
- 1000 Watts Max Power Handling
- Frequency Response: 35Hz-1k Hz
- Dimensions: 13H x 25.5W x 14D

PLBWS212

Dual 12" 1200 Watt Bandpass with Neon Woofer Rings

- Two 12 High Power 4 Ohm Subwoofer
- Silver Polypropylene Cone
- 2 Aluminum Voice Coil
- Specially Treated Black Rubber Edge Suspension
- Blue Neon Speaker Rings
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 2 Tuned Ports
- 1000 Watts Max Power Handling
- Frequency Response: 35Hz-1k Hz
- Dimensions: 15.5H x 29.5W x 15.5D



PLBN102

Dual 10" 2 Way 1000 Watt Bandpass w/Blue Woofer Rings

- Two 10 High Power 4 Ohm Subwoofers
- Silver Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexi Glass Front Window
- Blue LED Woofer Rings
- 4 Tuned Ports
- 1000 Watts Max Power Handling
- Dimensions: 30W x 13.6H x 14.8D

PLBN122

Dual 12" 2 Way 1200 Watt Bandpass w/Blue Woofer Rings

- Two 12 High Power 4 Ohm Subwoofers
- Silver Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexi Glass Front Window
- Blue LED Woofer Rings
- 4 Tuned Ports
- 1200 Watts Max Power Handling
- Dimensions: 31.8W x 15.6H x 16.8D

For more detailed specifications, product-specific information and models visit

www.PyleAudio.com

PYLE®



NEW



PLSL650K



PLSL4602



PLSL6502

PLSL4602 4" X 6" Watt Slim Mount 2-Way Coaxial Speakers

- 4" x 6" Poly Mica Paper Cone - Foam Edge
- 1" High Temperature Voice Coil
- 1/2" Neodymium PEI Dome Tweeter
- Power 80 Watt RMS/160 Watt Peak Power

- Impedance: 4 Ohms
- Frequency Response: 110-20KHz
- Concealment Magnet
- Strong Capacitor for Excellent Performance

- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1-5/16"

PLSL502 5.25" 160 Watt Slim Mount 2-Way Coaxial Speakers

- 5.25" Poly Mica Coated Paper Cone -
- 1" High Temperature Voice Coil
- 1/2" Neodymium PEI Dome Tweeter

- Power 80 Watts RMS/160 Watt Peak Power
- Frequency Response: 95-20KHz
- Concealment Magnet - Impedance: 4 Ohms

- Strong Capacitor for Excellent Performance
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1-5/8"

PLSL5702 5" x 7" / 6" x 8" 180 Watt Slim Mount 2-Way Coaxial Speakers

- 5" x 7"/6" x 8" Poly Mica Paper Cone
- 1" High Temperature Voice Coil
- 1/2" Neodymium PEI Dome Tweeter

- Power: 90 Watts RMS/180 Watts Peak Power
- Frequency Response: 75-20KHz
- Concealment Magnet - Impedance: 4 Ohms

- Strong Capacitor for Excellent Performance
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1-5/8"

PLSL650K 6.5" 300 Watt Slim Mount Two-Way Component Speaker System

- **This Custom Kit Contains:**
- One Pair 6.5" Mid Bass Speakers
- 6.5" Poly Mica Paper Cone with Foam Edge
- 1" High Temperature Voice Coil
- Concealment Magnet
- Power: 150 Watts RMS / 300 Watts MAX

- Impedance: 4 Ohm
- Frequency response: 75Hz-8KHz
- Mounting Depth: 1-3/4"
- One Pair 3/4" Silk dome Tweeters:
- Neodymium Magnet
- 3 Mounting Options: Flush, Surface Angle

- 75 Watts RMS / 150 Watts peak
- One Pair Passive Crossover Network:
- Two - Way Passive Crossover
- 12 dB Octave Slope
- Includes Grills Wires Installation Hardware

PLSL6502 6.5" 200 Watt Slim Mount Two-Way Coaxial Speakers

- 6.5" Poly Mica Coated Paper Cone
- 1" High Temperature Voice Coil
- 1/2" Neodymium PEI Dome Tweeter
- Power: 100 Watt RMS/200 Watts Peak Power

- Impedance: 4 Ohms
- Frequency Response: 85-20KHz
- Concealment Magnet
- Strong Capacitor for Excellent Performance

- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1-3/4"

PLSL6503 6.5" 200 Watt Slim Mount Three-Way Coaxial Speakers

- 6.5" Poly Mica Coated Paper Cone
- 1" High Temperature Voice Coil
- 1/2" Neodymium PEI Dome Tweeter
- Power: 100 Watt RMS/200 Watts Peak Power

- Impedance: 4 Ohms
- Frequency Response: 85-20KHz
- Concealment Magnet
- Strong Capacitor for Excellent Performance

- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1-3/4"

PLSL6902 6" x 9" 240 Watt Slim Mount Two-Way Coaxial Speakers

- 6" x 9" Poly Mica Coated Paper Cone
- 1" High Temperature Voice Coil
- 1" Neodymium PEI Dome Tweeter
- Power Handling: 120 Watts RMS/240 Watts

- Impedance: 4 Ohms
- Frequency Response: 65-20KHz
- Concealment Magnet
- Strong Capacitor for Excellent Performance

- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2-1/8"



PL63BL



PL42BL



PL6984BL

PL42BL 4" 180 Watt 2-Way Speakers

- One Pair 4" Two-way Speaker Systems
- Power Handling: 90 Watts Rms / 180 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 3/4" High Temperature ASV Voice Coil
- Standard 4" Size Fits OEM Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1/2" Neodymium Film Dome Tweeter
- Impedance: 4 Ohm
- Sensitivity: 88 dB
- Frequency Response: 110Hz - 20Khz
- Mounting Depth: 1.95"

PL463BL 4" x 6" 240 Watt 3-Way Speakers

- One Pair 4" x 6" Three-Way Triaxial Speaker Systems
- Power Handling: 120 Watts Rms / 240 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 4" X 6" Size Fits Oem Locations
- Blue Poly Injection Cone
- 20 Oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 89 dB
- Frequency Response: 95Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 1.75"

PL53BL 5.25" 200 Watt 3-Way Speakers

- One Pair 5.25" Three-Way Triaxial Speaker Systems
- Power Handling: 100 Watts Rms / 200 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 5.25" Size Fits Oem Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 89 dB
- Frequency Response: 100Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 1.9"

PL573BL 5" x 7" / 6" x 8" 300 Watt 3-Way Speakers

- One Pair 5" x 7" 6" x 8" Three-Way Triaxial Speaker Systems
- Power Handling: 150 Watts Rms / 300 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 5" x 7"/6" X 8" Size Fits OEM Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 90 dB
- Frequency Response: 80Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 2.25"

PL63BL 6.5" 360 Watt 3-Way Speakers

- One Pair 6.5" Three-Way Triaxial Speakers
- Power Handling: 180 Watts Rms / 360 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 6.5" Size Fits OEM Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 89 Db
- Frequency Response: 90Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 1.9"

PL683BL 6" x 8" 360 Watt 3-Way Speakers

- One Pair 6" x 8" Three-Way Triaxial Speakers
- Power Handling: 180 Watt Rms / 360 Watt Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 6" x 8" Size Fits OEM Locations
- Blue Poly Injection Cone
- 40 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 91 Db
- Frequency Response: 70Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 2.35"

PL684BL 6" x 9" 400 Watt 4-Way Speakers

- One Pair 6" X 9" Four-Way Quadriaxial Speakers
- Power Handling: 200 Watts Rms / 400 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1.25" High Temperature ASV Voice Coil
- Standard 6" X 9" Size Fits OEM Locations
- Blue Poly Injection Cone - 50 Oz Magnet Structure
- 1-1/2" Film Dome Midrange
- 1" Film Dome Tweeter - 3/4" Piezo Tweeter
- Impedance: 4 Ohm - Sensitivity: 92 Db
- Frequency Response: 50Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 3.65"



PLG4.2



PLG4.1.3



PLG54

PLG3.2 3.5" 120 Watt Two-Way Speakers

- Standard 3.5" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil

- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 20 oz. Magnet Structure - Impedance: 4 Ohms
- Rubber Magnet Cover
- Power Handling: 60 Watts RMS /120 Watts Peak

- Frequency Response: 100-20KHz
- Includes Wires and Installation Hardware
- Mounting Depth: 1.65"

PLG4.2 4" 140 Watt Two-Way Speakers

- Standard 4" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil

- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 20 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 70 Watts RMS /140 Watts Peak
- Frequency Response: 90-20KHz

- Impedance: 4 Ohms
- Includes Grills, Wires Installation Hardware
- Mounting Depth: 1.85"

PLG41.3 4" x 10" 300 Watt Three-Way Speakers

- Standard 4"x10" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter

- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket - 45 oz. Magnet
- Rubber Magnet Cover - Impedance: 4 Ohms
- Power Handling: 150 Watts RMS /300 Watts Peak

- Frequency Response: 60-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.45"

PLG46.2 4" x 6" 180 Watt Two-Way Speakers

- Standard 4"x6" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter

- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover

- Power Handling: 90 Watts RMS /180 Watts Peak
- Frequency Response: 70-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2"

PLG46.3 4" x 6" 180 Watt Three-Way Speakers

- Standard 4"x6" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Midrange
- Super Film Tweeter

- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 90 Watts RMS /180 Watts Peak

- Frequency Response: 70-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2"

PLG5.2 5.25" 140 Watt Two-Way Speakers

- Standard 5.25" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter

- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover

- Power Handling: 70 Watts RMS /140 Watts Peak
- Frequency Response: 80-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2"

PLG5.3 5.25" 140 Watt Three-Way Speakers

- Standard 5.25" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Midrange
- Super Film Tweeter
- High Temperature Aluminum Voice Coil

- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 30 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 70 Watts RMS /140 Watts Peak
- Frequency Response: 80-20KHz

- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware
- Mounting Depth: 2"

PLG54 5" 200 Watt Mid Bass Woofer

- Yellow CD P.P. Cone
- Specially Treated Rubber Surround
- Edge Suspension

- 1.0" High Temperature Aluminum Voice Coil
- Magnet Weight: 30 Oz
- Impedance: 4 OHM

- 200 Watts Peak Power
- Mounting Depth: 2.20"
- Cut-out Size: $\Phi 113$ mm



PLG64



PLG6.4



PLG69.3

PLG57.2 5" x 7" / 6" x 8" 240 Watt Two-Way Speakers

- Standard 5"x7"/6"x8" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter

- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover

- Power Handling: 120 Watt RMS /240 Watt Peak
- Frequency Response: 75-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.10"

PLG57.3 5" x 7"/6" x 8" 240 Watt Three-Way Speakers

- Standard 5"x7"/6"x8" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Midrange

- Super Film Tweeter - Mounting Depth: 2.10"
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms

- 30 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 120 Watt RMS /240 Watt Peak
- Frequency Response: 75-22KHz
- Includes Grills, Wires and Installation Hardware

PLG6.2 6.5" 240 Watt Two-Way Speakers

- Standard 6.5" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter

- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover

- Power Handling: 120 Watt RMS /240 Watt Peak
- Frequency Response: 65-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.25"

PLG6.3 6.5" 280 Watt Three-Way Speakers

- Standard 6.5" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Midrange
- Super Film Tweeter

- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 40 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 140 Watt RMS /280 Watt Peak

- Frequency Response: 60-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.25"

PLG6.4 6.5" 300 Watt Four-Way Speakers

- Standard 6.5" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 1.75" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter

- Super Film Tweeter - Mounting Depth: 2.25"
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 40 oz. Magnet Structure - Rubber Magnet Cover

- Power Handling: 150 Watt RMS /300 Watt Peak
- Frequency Response: 60-20KHz
- Includes Grills, Wires and Installation Hardware

PLG64 6.5" 300 Watt Mid Bass Woofer

- Yellow CD P.P. Cone
- Specially Treated Rubber Edge Suspension

- 1.0" High Temperature Voice Coil
- Aluminum Voice Coil - Magnet Weight: 30 Oz
- Rubber Magnet Boot Cover

- 300 Watts Peak Power - Impedance: 4 OHM
- Mounting Depth: 2.84" - Cut-out Size: Φ140 mm

PLG68.3 6" x 8" 280 Watt Four-Way Speakers

- Standard 6"x8" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 1.75" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter

- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 40 oz. Magnet Structure - Impedance: 4 Ohms

- Power Handling: 140 Watt RMS /280 Watt Peak
- Frequency Response: 65-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.45"

PLG69.3 6" x 9" 360 Watt Three-Way Speakers

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter

- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 100 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 180 Watt RMS /360 Watt Peak

- Frequency Response: 45-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 3.5"



PLG8.3



PLG6C



PLG71.4

PLG69.4 6" x 9" 400 Watt Four-Way Speakers

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter

- Super Film Tweeter - Impedance: 4 Ohms
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Mounting Depth: 3.5"
- 100 oz Magnet - Rubber Magnet Cover

- Power Handling: 200 Watt RMS /400 Watt Peak
- Frequency Response: 45-22KHz
- Includes Grills, Wires and Installation Hardware

PLG69.5 6" x 9" 450 Watt Five-Way Speakers

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter

- 2 x Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 120 oz. Magnet Structure - Rubber Magnet Cover

- Power Handling: 225 Watt RMS /450 Watt Peak
- Frequency Response: 45-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 3.5"

PLG69.8 6" x 9" 500 Watt Eight-Way Speakers

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter

- 5 x Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 120 oz. Magnet - Rubber Magnet Cover

- Power Handling: 250 Watt RMS /500 Watt Peak
- Frequency Response: 45-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 3.55"

PLG6C 6.5" 400 Watt 2-Way Custom Component System

- This Custom Kit Contains
- One Pair 6.5" Mid Bass Speaker
- Standard 6.5" Size Fits OEM Locations
- Yellow Color Poly Injection Cone
- Non-Fatiguing Butyl Rubber Surround
- High Temperature Aluminum Voice Coil
- Special Electroplated Steel Basket
- 40 Oz. Magnet Structure

- Power Handling: 200 Watt RMS / 400 Watt MAX
- Impedance: 4 Ohm - Neodymium Magnet
- Frequency response: 50Hz-5KHz
- Mounting Depth: 2.65"
- One Pair 0.5" Tweeter: 0.5" Silk Dome Tweeter
- 3 Mounting Options: Flush, Surface or Angle
- 50 Watts RMS / 100 Watts peak
- Frequency response: 1.3-22KHz

- Impedance: 4 Ohm
- One Pair Passive Crossover Network:
- Two - Way Passive Crossover
- 12 dB Octave Slope
- Includes Grills Wires Installation Hardware
- Wiring Kit
- Wiring Diagram Template
- Cut-out Size: $\Phi 142$ mm

PLG71.4 7" x 10" 450 Watt Four-Way Speakers

- Standard 7"x10" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- Super Film Tweeter

- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 120 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 225 Watts RMS /450 Watts Peak

- Frequency Response: 40-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware
- Mounting Depth: 3.55"

PLG8.3 8" 400 Watt Three-Way Speakers

- Standard 8" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2.5" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter

- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket - Rubber Magnet
- 120 oz. Magnet Structure - Impedance: 4 Ohms
- Power Handling: 200 Watt RMS /400 Watt Peak

- Frequency Response: 37-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 3.25"



PLX62



PLX4102



PLX42

PLX32 3.5" 100 Watt Two-Way Speakers

- 3.5" Polypropylene Woofer Cone
- 0.75" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter

- 50 Watts RMS/100 Watts Max Power
- Frequency Response: 66 - 20k hz
- 4 Ohms Impedance

- Rubber Boot Magnet Cover
- Includes Wires and Mounting Hardware
- Mounting Depth: 1.5"

PLX4102 4" x 10" 300 Watt Two-Way Speakers

- 4" x 10" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter

- 150 Watts RMS/300 Watts Max Power
- Frequency Response: 60 - 20k hz
- 4 Ohms Impedance

- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2.5"

PLX42 4" 120 Watt Two-Way Speakers

- 4" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter

- 60 Watts RMS/120 Watts Max Power
- Frequency Response: 66 - 20k hz
- 4 Ohms Impedance

- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2"

PLX462 4" x 6" 160 Watt Two-Way Speakers

- 4" x 6" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter

- 80 Watts RMS/160 Watts Max Power
- Frequency Response: 66 - 20k hz
- 4 Ohms Impedance

- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 1.9"

PLX52 5.25" 120 Watt Two-Way Speakers

- 5.25" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter

- 60 Watts RMS/120 Watts Max Power
- Frequency Response: 55 - 20k hz
- 4 Ohms Impedance

- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2"

PLX572 5" x 7" / 6" x 8" 180 Watt Two-Way Speakers

- 5" x 7" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter

- 90 Watts RMS/180 Watts Max Power
- Frequency Response: 50 - 20k hz
- 4 Ohms Impedance

- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2.25"

PLX62 6.5" 160 Watt Two-Way Speakers

- 6.5" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter

- 80 Watts RMS/160 Watts Max Power
- Frequency Response: 66 - 20k hz
- 4 Ohms Impedance

- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2"

PLX63 6.5" 180 Watt Three-Way Speakers

- 6.5" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 2" Pole Mounted Aluminum Midrange
- 1" Mylar Dome Tweeter

- 90 Watts RMS/180 Watts Max Power
- Frequency Response: 50 - 22k hz
- 4 Ohms Impedance
- Rubber Boot Magnet Cover

- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2"



PLCH42

4" 140 Watt 2-Way Speaker System

- 2-Way Coaxial Speaker System With Concealed Magnet
- Standard 4 Size Fits OEM Locations
- Special Electroplated Poly Injection Cone
- 0.5" Neodymium Dome Tweeter
- 1" High Temperature Aluminum Voice Coil
- Special Electroplated Steel Basket
- Concealment Magnet

- 20 Oz. Magnet Structure
- Power Handling: 70 Watts RMS / 140 Watts MAX
- Impedance: 4 Ohm
- Sensitivity: 82 dB
- Frequency response: 95Hz-20KHz
- Includes Grills Wires Installation Hardware



PLCH52

5.25" 160 Watt 2-Way Speaker System

- 2-Way Coaxial Speaker System With Concealed Magnet
- Standard 5.25 Size Fits OEM Locations
- Special Electroplated Poly Injection Cone
- 0.5" Neodymium Dome Tweeter
- 1" High Temperature Aluminum Voice Coil
- Special Electroplated Steel Basket
- Concealment Magnet

- 25 Oz. Magnet Structure
- Power Handling: 80 Watts RMS / 160 Watts MAX
- Impedance: 4 Ohm
- Sensitivity: 88 dB
- Frequency response: 85Hz-20KHz
- Includes Grills Wires Installation Hardware
- Mounting Depth: 2.05"



PLCH62

6.5" 240 Watt 2-Way Speaker System

- 2-Way Coaxial Speaker System With Concealed Magnet
- Standard 6.5 Size Fits OEM Locations
- Special Electroplated Poly Injection Cone
- 0.5" Neodymium Dome Tweeter
- 1" High Temperature Aluminum Voice Coil
- Special Electroplated Steel Basket
- Concealment Magnet

- 35 Oz. Magnet Structure
- Power Handling: 120 Watts RMS / 240 Watts MAX
- Impedance: 4 Ohm
- Sensitivity: 90 dB
- Frequency response: 75Hz-20KHz
- Includes Grills Wires Installation Hardware
- Mounting Depth: 2.51"



PLCH693

6 x 9" 360 Watt 3-Way Speaker System

- 3-Way Triaxial Speaker System With Concealed Magnet
- Standard 6.5 Size Fits OEM Locations
- Special Electroplated Poly Injection Cone
- 2.5" Film Cone Midrange
- 0.5" Neodymium Dome Tweeter
- 1.25" High Temperature Aluminum Voice Coil
- Special Electroplated Steel Basket

- Concealment Magnet
- 55 Oz. Magnet Structure
- Power Handling: 180 Watts RMS / 360 Watts MAX
- Impedance: 4 Ohm
- Sensitivity: 93 dB
- Frequency response: 50Hz-20KHz
- Includes Grills Wires Installation Hardware
- Mounting Depth: 3.11"



PLCH6K

6.5" 300 Watt 2-Way Component Speaker System

- This Custom Kit Contains:
- One Pair 6.5 Mid Bass Speaker
- Standard 6.5 Size Fits OEM Locations
- Special Electroplated Poly Injection Cone
- Non-Fatiguing Butyl Rubber Surround
- 1" High Temperature Aluminum Voice Coil
- Special Electroplated Steel Basket
- Concealment Magnet
- 40 Oz. Magnet Structure
- Power Handling: 150 Watts RMS / 300 Watts MAX
- Impedance: 4 Ohm
- Frequency response: 70Hz-5KHz
- Mounting Depth: 2.51"
- One Pair DCT Tweeter:

- 1 Silk Dome Tweeter
- Neodymium Magnet
- 3 Mounting Options: Flush, Surface or Angle Mount
- 75 Watts RMS / 150 Watts peak
- Frequency response: 1.3-24KHz
- Impedance: 4 Ohm
- One Pair Passive Crossover Network:
- Two - Way Passive Crossover
- 12 dB Octave Slope
- Accessories
- Includes Grills Wires Installation Hardware
- Wiring Kit
- Wiring Diagram Template
- Cut-out Size: 49 mm



PLRL572

5" x 7" & 6" x 8" 200 Watt Two-Way Speakers

- Pair 5x7 Two-Way Speaker System
- Electroplated Red Polypropylene Cone Rubber Edge
- 1 High Temperature Ferro Fluid Enhanced Voice Coil
- 1 Mylar Dome Tweeter
- 100 Watts RMS/200 Watts Peak Power

- 4 Ohm Impedance
- Freq. Response: 50Hz - 20KHz
- Rubber Magnet Boot Cover
- Includes Grills, Wires Installation Hardware
- Mounting Depth: 2.25"



PLVWCRK5 1/2" DIN 5.1 Center Channel 7 Way Mono Audio 50 Watt Amplifier & Speaker Enclosure System

- High Power 50W Maximum Power Amplifier
- Five (5) 3/4" Forward Mount Full Range Audio
- Two (2) 1" Rear Mount Mid-Bass Response
- Mounting Brackets Hardware Included
- The Compact 1/2 Din Design Allows For In-dash or Universal Mounting
- 5.1 Surround Sound Audio Speaker Amplifier Specs:
- Continuous Power Output: 25W
- Peak Power Output: 50W

- Frequency Response: 200 Hz To 28K Hz.
- Power Supply Voltage: 10.8V To 15.6V
- Current Consumption: 3A
- Dimensions: 1.75 (H) X 3.5(W) X 5.75 (L)
- Weight: 1Lb Speaker Box Specs:
- Five (5) 3/4" Forward Mount Full Range Audio
- Two (2) 1" Rear Mount Mid-Bass Response
- Dimensions: 1.125 (H) X 6.75(W) X 6.5 (L)
- Weight: 0.55Lb



PLST6 1/2" 150 Watt Mylar Dome Tri-Mount Tweeter

- 0.5" Mylar Dome
- High Density Neodymium Magnet
- Tri-Mounting System: Flush/Swivel/Surface
- Ferro Fluid Cooling
- 12Db Crossover Network

- Frequency Response: 1.3Khz-22khz
- Spl: 92db @ 1w/1m
- Power Handling: 75 Watts RMS/150 Watts Max
- Includes Custom Mounts, Wires and Installation Hardware



PLTWVS 6-Way Sunvisor Mount 200 Watt Tweeter System

- Designed For Many Cars
- Over-All Height 14.5mm (0.57")
- 60mm Piezo-Type Midrange x 4
- 40mm Piezo-Type Tweeter x 2
- Power Handling: 100 Watts RMS/200 Watts Max
- Impedance: 4 Ohm

- Sensitivity: 90 dB
- Frequency Response: 2.5KHz - 20KHz
- Includes Wires and Installation Hardware (Mounting Straps)
- Dimensions : 11.75(W) x 4.75(H) x 0.57(D)



PLWT3 1" 120 Watt Mini Mylar Dome Tri-Mount Tweeter

- 1" Mylar Dome
- High Density Neodymium Magnet
- Tri-Mounting System: Pivot/Angle/Surface
- Ferro Fluid Cooling
- Integrated Crossover System

- Frequency Response: 2khz-24khz
- Spl: 100db @ 1w/1m
- Power Handling: 60 Watts RMS/120 Watts Max
- Includes Custom Mounts, Wires and Installation Hardware



PLWT4 1.5" 200 Watt Surface Mount Piezo Tweeter

- Extended High Frequency 1.5" Piezo Driver
- Surface Mounting System
- Frequency Response: 3Khz-30Khz
- Sensitivity: 87db @ 1w/1m

- Power Handling: 100 Watts RMS/200 Watts Max
- Includes Custom Mount, Wires and Installation Hardware





PLAM14

20ft 8 Gauge 1000 Watts Amplifier Hookup For Battery Head Unit & Speakers Installation Kit

- 20ft. 8 Gauge Red Power Wire
- 4ft. 8 Gauge Black Ground Wire
- 20ft. 16 Gauge Blue Remote Turn-On
- 20ft. 12 Gauge Stereo Speaker Wire
- 20ft. Stereo RCA Audio Cable (Male to Male)
- 6ft. Black Split Loom Cable Conduit
- AGU Type 60A Gold Plated Fuse
- In-Line Water Resistant Fuse Holder
- 2 Ring Terminals: 8G
- 2 Spade Terminals: 8G
- 5 Spade Terminals: 14-16G
- 3 Butt Connectors
- 20 Cable Ties
- 1 Black Grommet



PLAM20

4 Gauge Amplifier Installation Kit

- 21ft. 4 Gauge Red Power Cable
- 4ft. 4 AWG Clear Black Ground Cable
- In-Line Water Resistant Fuse Holder
- 80 Amp AGU Fuse Included
- 20ft. Clear Green Twisted Pair Stereo RCA Interconnect Cable
- 20ft. 16 AWG Clear Stereo Speaker Cable
- 17ft. Blue Remote Cable
- 6ft. Split Loom Cable Conduit
- Power Distribution Block, Gold
- 4 AGW Ring Terminal, 2 pcs
- 4 Spade Terminal, 2 pcs
- 2- 4 AGW Ring Terminals
- 16-14 AGW Spade Terminals 4 pcs
- 10- Cable Ties, 7



PLAM40

20ft 4 Gauge 1600 Watt Amplifier Hookup For Battery Head Unit & Speakers Installation Kit

- 20ft. 4 Gauge Red Power Wire
- 4ft. 4 Gauge Black Ground Wire
- 20ft. 16 Gauge Blue Remote Turn-On
- 20ft. 12 Gauge Stereo Speaker Wire
- 20ft. Stereo RCA Audio Cable (Male to Male)
- 6ft. Black Split Loom Cable Conduit
- AGU Type 60A Gold Plated Fuse
- In-Line Water Resistant Fuse Holder
- 2 Ring Terminals: 4G
- 2 Spade Terminals: 4G
- 5 Spade Terminals: 16-18G
- 3 Butt Connectors
- 20 Cable Ties
- 1 Black Grommet



PLDS20

Dual 40 Amp In-Line Circuit Breaker/ Power Distribution Block

- Power Distribution Block
- Built In Circuit Breaker
- 3 In (4 Gauge)
- 2 Out (8Gauge)
- Allen Screw Terminals
- 40 Amp Power Surge
- Dimensions: 3.60L x 3.10W x 1.15H



PLDS30

Triple 40 Amp In-Line Circuit Breaker

- Power Distribution Block
- Built In Circuit Breaker
- 3 In (4 Gauge)
- 3 Out (8Gauge)
- Allen Screw Terminals
- 40 Amp Power Surge
- Dimensions: 3.90L x 4.10W x 1.25H



PSC - Speaker Zip Wire



Model	Gauge	Length (in feet)
PSC1250	12	50
PSC12100	12	100
PSC12250	12	250
PSC12500	12	500
PSC1450	14	50
PSC14100	14	100
PSC14250	14	250
PSC14500	14	500
PSC1650	16	50
PSC16100	16	100
PSC16250	16	250
PSC16500	16	500
PSC1850	18	50
PSC18100	18	100
PSC18250	18	250
PSC18500	18	500
PSC181000	18	1000

PLCAPE18

1.8 Farad Digital Power Capacitor

- 1.8 Farad Digital Display Power Capacitor
- Capacitance $\pm 5\%$. 20-24 Volt Surge, 105oC
- Blue Digital Display and blue LED flash
- Strong Finishing For A Better Installation Result
- 1 Pair Clear Brackets Included
- Chrome Plated Post Kits
- DC 12- 24 volt
- Electronic Polarity Protection Circuit
- Over Voltage Protection Circuit
- Includes Mounting Charging Hardware
- Aluminum Brushed Case
- Dimensions: 8.66H 2.99W



PLCAPE50

5.0 Farad Digital Power Capacitor

- 5.0 Farad Digital Display Power Capacitor
- Capacitance $\pm 5\%$. 20-24 Volt Surge, 105oC
- Blue Digital Display and blue LED flash
- Strong Finishing For A Better Installation Result
- 1 Pair Clear Brackets Included
- Chrome Plated Post Kits
- DC 12- 24 volt
- Electronic Polarity Protection Circuit
- Over Voltage Protection Circuit
- Includes Mounting Charging Hardware
- Aluminum Brushed Case
- Dimensions: 8.86H 3.5W





Single Beam HID Xenon Driving Light Systems

Bulb Number	3,000K Yellow	4,300K Yellow/White	6,000K White	8,000K White/Blue	10,000K Blue/Purple	12,000K Purple
880	PHD880K3K	PHD880K4.3K	PHD880K6K	PLHID880K	PHD880K10K	PHD880K12K
9005	PHD9005K3K	PHD9005K4.3K	PHD9005K6K	PLHID9005K	PHD9005K10K	PHD9005K12K
9006	PHD9006K3K	PHD9006K4.3K	PHD9006K6K	PLHID9006K	PHD9006K10K	PHD9006K12K
H10	PHDH10K3K	PHDH10K4.3K	PHDH10K6K	PLHIDH10K	PHDH10K10K	PHDH10K12K
H11	PHDH11K3K	PHDH11K4.3K	PHDH11K6K	PLHIDH11K	PHDH11K10K	PHDH11K12K
H1	PHDH1K3K	PHDH1K4.3K	PHDH1K6K	PLHIDH1K	PHDH1K10K	PHDH1K12K
H3	PHDH3K3K	PHDH3K4.3K	PHDH3K6K	PLHIDH3K	PHDH3K10K	PHDH3K12K
H7	PHDH7K3K	PHDH7K4.3K	PHDH7K6K	PLHIDH7K	PHDH7K10K	PHDH7K12K
5202	PHD5202K3K	PHD5202K4.3K	PHD5202K6K	PLHID5202K	PHD5202K10K	PHD5202K12K

- Plug and Play Wire Harness Adapter Included
- No Permanent Modifications to Vehicle
- Long Lasting 3000hr Lifetime
- Safety with Protection Functions
- Connection Circuit Protection Test
- Short Circuit Protection Test


- Power: 35W
- Standard Input Current: 3.2A
- Normal Operating Voltage: 80V
- Luminous Flux > 3200lm
- EMC Anti-jamming
- Installation Instructions Included

Dual (Low/High) Beam HID Xenon Driving Lights

Bulb Number	3,000K Yellow	4,300K Yellow/White	6,000K White	8,000K White/Blue	10,000K Blue/Purple	12,000K Purple
9004	PHD9004K3K	PHD9004K4.3K	PHD9004K6K	PLHID9004K	PHD9004K10K	PHD9004K12K
9007	PHD9007K3K	PHD9007K4.3K	PHD9007K6K	PLHID9007K	PHD9007K10K	PHD9007K12K
H13	PHDH13K3K	PHDH13K4.3K	PHDH13K6K	PLHIDH13K	PHDH13K10K	PHDH13K12K
H4	PHDH4K3K	PHDH4K4.3K	PHDH4K6K	PLHIDH4K	PHDH4K10K	PHDH4K12K

- Functional High and Low Beam Circuit
- Plug and Play Wire Harness Adapter Included
- No Permanent Modifications to Vehicle
- Long Lasting 3000hr Lifetime
- Safety with Protection Functions
- Connection Circuit Protection Test
- Short Circuit Protection Test

- Power: 35W
- Standard Input Current: 3.2A
- Normal Operating Voltage: 80V
- Luminous Flux > 3200lm
- EMC Anti-jamming
- Installation Instructions Included

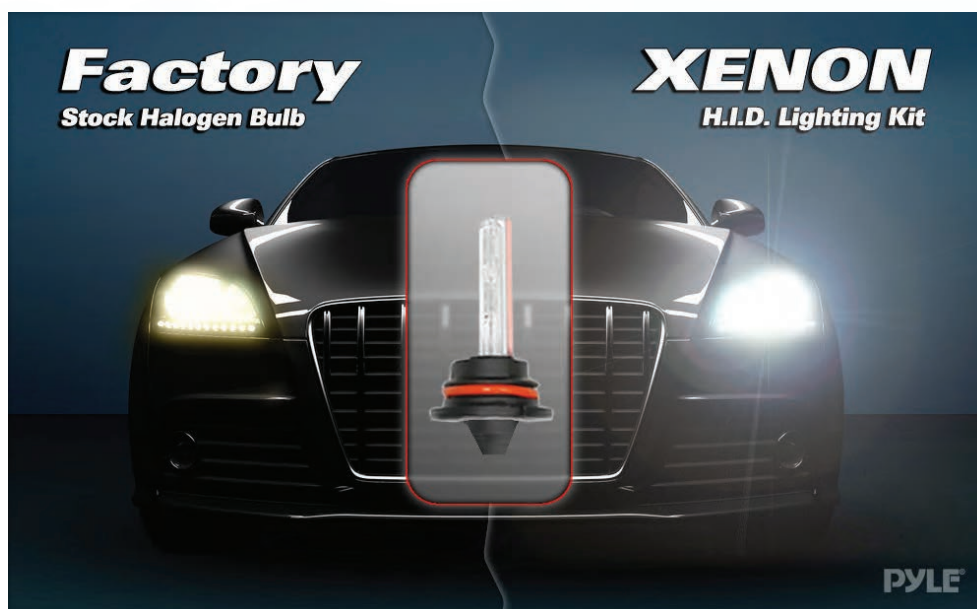

Slim Ballast Single Beam HID Xenon Driving Light Systems

Bulb Number	6,000K White	8,000K White/Blue	10,000K Blue/Purple	12,000K Purple
880	PSB880K6K	PSB880K8K	PSB880K10K	PSB880K12K
9005	PSB9005K6K	PSB9005K8K	PSB9005K10K	PSB9005K12K
9006	PSB9006K6K	PSB9006K8K	PSB9006K10K	PSB9006K12K
H10	PSBH10K6K	PSBH10K8K	PSBH10K10K	PSBH10K12K
H11	PSBH11K6K	PSBH11K8K	PSBH11K10K	PSBH11K12K
H1	PSBH1K6K	PSBH1K8K	PSBH1K10K	PSBH1K12K
H3	PSBH3K6K	PSBH3K8K	PSBH3K10K	PSBH3K12K
H7	PSBH7K6K	PSBH7K8K	PSBH7K10K	PSBH7K12K
5202	PSB5202K6K	PSB5202K8K	PSB5202K10K	PSB5202K12K

- Slim Ballast Takes Up Less Room
- Plug and Play Wire Harness Adapter Included
- No Permanent Modifications to Vehicle
- Long Lasting 3000hr Lifetime
- Safety with Protection Functions
- Connection Circuit Protection Test
- Short Circuit Protection Test

- Power: 35W
- Standard Input Current: 3.2A
- Normal Operating Voltage: 80V
- Luminous Flux > 3200lm
- EMC Anti-jamming
- Installation Instructions Included

Slim Ballast Dual (Low/High) Beam HID Xenon Driving Lights

Bulb Number	6,000K White	8,000K White/Blue	10,000K Blue/Purple	12,000K Purple
9004	PSB9004K6K	PSB9004K8K	PSB9004K10K	PSB9004K12K
9007	PSB9007K6K	PSB9007K8K	PSB9007K10K	PSB9007K12K
H13	PSBH13K6K	PSBH13K8K	PSBH13K10K	PSBH13K12K
H4	PSBH4K6K	PSBH4K8K	PSBH4K10K	PSBH4K12K

- Slim Ballast Takes Up Less Room
- Functional High and Low Beam Circuit
- Plug and Play Wire Harness Adapter Included
- No Permanent Modifications to Vehicle
- Long Lasting 3000hr Lifetime
- Safety with Protection Functions
- Connection Circuit Protection Test

- Short Circuit Protection Test
- Power: 35W
- Standard Input Current: 3.2A
- Normal Operating Voltage: 80V
- Luminous Flux > 3200lm
- EMC Anti-jamming
- Installation Instructions Included