

# 2014 *Home*





## Pyle Home

| TVs / Monitors                          | 184 |
|---|-----|
| Projectors                              |     |
| Projector Screens & Mounts              | 188 |
| TV Wall Mounts                          | 190 |
| Wall Plates (HDMI & Multi-Component)    | 198 |
| Home Theater Systems                    | 199 |
| Home Theater Towers                     | 201 |
| iPod / iPhone / iPad Docking Systems    | 203 |
| Bluetooth Receivers / Portable Speakers | 205 |
| Turntables                              | 208 |
| Tablet PC / iPad Stands & Mounts        | 213 |
| Classical Themed Phone Systems          | 216 |
| Astro Tablet                            |     |
| Astro Power Banks                       | 218 |
| Headphone Amplifiers                    | 219 |
| Headphones / Headsets                   |     |
| Voice Recorders / Hearing Assistance    | 223 |
| Receivers                               | 224 |
| Home Amplifiers                         | 226 |
| Mini Amplifiers                         |     |
| Digital Tuners /Speaker Selectors       |     |
| Hanging / Ceiling Speakers              |     |
| In-Wall / In-Ceiling Speakers           | 235 |
| Bookshelf / Wall Mount Speakers         |     |
| Weather Proof Indoor / Outdoor Speakers |     |
| Indoor / Outdoor PA Horn Speakers       |     |
| Home Theater Subwoofers                 |     |
| Wall Plates / In-Wall Control           |     |
| Steam Cleaners / Steam Press            | 242 |
|   |     |



## Pyle Meters

| Step Up - Step Down / Voltage Converters 259 | 259 |
|--|-----|
| Multimeters / Network & Cable Testers 260    | 260 |
| Voltage / Metal / Temperature / Humidity 261 | 261 |
| Anemometer / Tachometer / Light Meters 262   | 262 |
| Manometers / Sound / Distance Meters 263     | 263 |



Armor Shield Covers .....

S- en seant



### **Hi-Definition LCD Flat Panel TVs**

- Hi-Definition LCD TV .
- NTSC Auto Color System .
- . .
- N I SC Auto Color System 16:9 (Widescreen) Screen Aspect Ratio Built-In Analog (NTSC)/Digital (HD/ATSC) Tuners 16.7 Million Color High Resolution Display HDTV Compatible: 480i, 480p, 720p,1080i Progressive Scan CCD, V-Chip Built-In Speakers 2 x 3W Permoved Parse Stand

- .
- . Removable Base Stand
- VESA Wall Mount Compatible (Bracket not Included) Multi Language OSD:
- (English/French/German/Italian/Spanish)
- .
- RF Cable Input .
- Headphone Audio Line output •
- MPEG Digital Media player Includes Full Function Remote Control AC Input: 110V/240 Voltage Selectable
- Input Options: AV, VGA, HDMI and more! .



x

| Model    | Size  | Video Modes |
|----------|-------|-------------|
| PTC157LE | 15.6" |             |
| PTC159LD | 15.6" | 480i        |
| PTC197LE | 18.5" | 480p        |
| PTC199LD | 19''  | 720p        |
| PTC239LD | 22''  | 1080i       |
| PTC339LD | 32"   |             |

O

...

<u>a</u> <u>a</u>

#### **In-Wall Mount LCD Flat Panel Monitors**

#### (Home & Mobile Use)

- **BNC** Connector
- 300:1 Contrast Ratio
- Power Supply: DC 12V
- PAL/NTSC Auto Color System Video Input: RCA, VGA & VESA TFT LCD Wall-Mountable Screen
- Viewing Angle: 40° Up 70° Down 70° Left & Right
- Wireless Remote Control and In-Wall Mounting Bracket Included





| Model    | Size  | Resolution |  |  |
|----------|-------|------------|--|--|
| PLVW9IW  | 9.2"  | 640 x 234  |  |  |
| PLVW10IW | 10.4" | 640 x 480  |  |  |
| PLVW15IW | 15"   | 1024 x 768 |  |  |
| PLVW17IW | 17"   | 1280 x 800 |  |  |
| PLVW19IW | 19''  | 1440 x 900 |  |  |

## **TVs / Monitors**

## Widescreen High Resolution Portable Monitor w/ Built-In Multimedia Disc, MP3, MP4 Players, **USB Port & SD Card Slot Readers**

- .
- ID3 Tag Compatible High Resolution TFT LCD Screen Display Supports Multi Regional PAL/NTSC Support USB Key/SD Memory Card RCA Audio/Video Line Input & Output

- Includes Full Function Remote Control Built-In Rechargable Battery Adjustable/Foldable Viewing Angle Screen with Rotation Compatible with DVD, DVD-R, DVD-RW, VCD, MP3, MP4
- (720P & Under), CD-R, CD-RW, JPEG, JPG, DIVX, AVI,

| MPG, VOB, RMVB, MOV, FLV, OGG Vorbis | , ASF, DAI |            |
|--------------------------------------|------------|------------|
| Model                                | Size       | Resolution |
| PDH7                                 | 7"         | 480 x 234  |
| PDH9                                 | 9''        | 600 x 234  |
| PDH14                                | 14"        | 1366 x 768 |

## PRJHD198

#### Home Theater Multimedia Widescreen Projector - Up To 100-Inch Viewing Screen, **Built-In Speakers, USB/SD Media Player & PC Connection Compatible**

- Build-in Speaker Contrast: 800:1

- Resolution: 800 x 600 Machine Power: 200 Watt Screen Size: 60-100 Inch Aspect Ratio: 16:9 or 4:3
- Lamp Life: 6000-8000 Hours Illumination Level: 1800 Lumen
- Projection System: 5 Inch TFT LCD Supports: (1024 x 768) 720p, 1080p

- Working Voltage: AC 90-110 V 50 HZ Projection Lighting Source: 6000-8000 Hours Supports International Signal Systems & Languages Lens: 3 Flake Broad Band Film Plating & High

- Definition Focus Interface: AV, S-video, VGA, HDMI, Component Video, SCART, USB/SD Media Reader, Audio Input & Outputs
- Dimensions: 11H x 6W x 15D





- Contrast: 800:1
- . Built-in Speaker
- Aspect Ratio: 16:9 or 4:3 Screen Size: 60-100 Inch Machine Power: 200 Watt

- Machine Power: 200 Watt Lamp Life:6000-8000 Hours Illumination Level: 1800 Lumen Projection System: 5 Inch TFT LCD Working Voltage: AC 90-110 V 50 HZ
- Projection Lighting Source: 6000-8000 Hours Resolution: (640 x 480) Supports 720p & 1080i

- Signal System: Supporting International System Supports International Signal Systems & Languages Lens: 3 Flake Broad Band Film Plating & High

Home Theater Multimedia Widescreen Projector - Up To 100-Inch Viewing

Definition Focus Interface: AV, VGA, HDMI (x2), Component Video & Audio Outputs Dimensions: 11H x 6W x 15D



PRJLE60

#### Portable LED Projector for Gaming TV Shows Movies and Sports at Up To 100 Inches

- Projector Uses LED Lighting For Maximum Brightness


- and Clarity 3.2 TFT LCD Renders Your Video In Beautiful Color 50 W Lamp Lasts Up To 20000 Hours Perfect for Video Games, TV Shows, Movies, or Sporte
- Sports

- Lens Focus: 125 mm Native Resolution: 640x480 Supports 800x600 and 1024x768 Inputs
- Inputs: Component Video, VGA, HDMI Brightness: 2500 Lumens (ANSI) Up To 15 Degrees Trapezoidal Correction Built-In Stereo Speakers
- Supports Projector Screens From 50 to 100 Inches Includes Remote Control, Power Cable, AV Cable,
- and Lens Tissue Wipes Runs On 110-240 V / 50-60 Hz







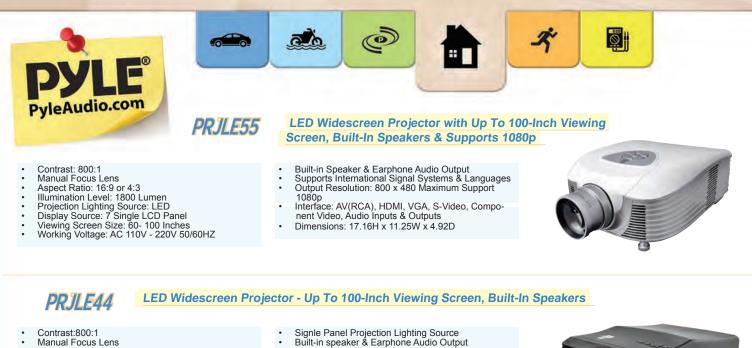

- Manual Focus Lens

- Aspect Ratio: 16:9 or 4:3 Interface:AV(RCA), HDMI, VGA Illumination Level: 1800 Lumen Viewing Screen Size: 60- 100 Inch Working Voltage: AC 110V-220V 50/60HZ

- Signal System: Supporting International System Supports International Signal Systems & Languages Native Resolution: 800 x 480, Maximum Support
- 1080p
- Dimensions: 17.16H x 11.25W x 4.92D

## PRJV66

#### Home Theater Multimedia Widescreen Projector - Up To 100-Inch Viewing Screen, Built-In Speakers & PC Connection Compatible

- Contrast:600:1
- Built-in Speaker Lamp Life:6000hours
- Screen Size: 60-100 Inch Machine Power: 200 Watt
- Aspect Ratio: 16:9 or 4:3 Illumination Level: 1200 Lumen
- Interface: AV, S-Video, VGA & RF

- Projection System: 5 Inch TFT LCD Working Voltage: AC 90-110 V 50 HZ Resolution:640\*480 Support:800\*600 Projection Lighting Source: 6000-8000 Hours Supports International Signal Systems & Languages
- Dimensions: 11H x 6W x 15D



## PRJLE84H

#### High-Definition Widescreen Projector with Up To 120-Inch Viewing Screen, Built-In Speakers, USB Flash Reader & Accepts 1080p Signal

Widescreen LED Projector with up to 140-Inch Viewing Screen,

Built-In Speakers, USB Flash Reader & Supports 1080p

- Contrast: 1200:1
- Manual Focus Lens Aspect Ratio: 16:9 or 4:3

- Illumination Level: 1800 Lumen Built-in USB Flash Drive Reader Screen Size: 60 120 Inches Single Panel Projection Lighting Source
- Built-in speaker & Earphone Audio Output

- Working Voltage: AC 110V/220V 50/60HZ Signal System: Supporting International System Supports International Signal Systems & Languages Output Resolution: 1280 x 800 Maximum Support 1080p
- Interface:AV(RCA), HDMI, VGA, YPBPR, HD, USB, & AUDIO IN



### PRJD901

- Contrast: 1,000:1

- 3.8 x 200mm Manual Focus Lens Aspect Ratio: 16:9 or 4:3 Illumination Level: 2,200 Lumen Built-in USB Flash Drive Reader Screen Size: Adjustable 50 140 Inches
- LED Projection Lighting Source Built-in Stereo Speakers
- Native Resolution: 640 x 480 Support 720p, 1080p Interface: AV(RCA), HDMI x 2, USB x 2, VGA, RCA AV, YPBPR HD, & Audio Line Output

**Projectors** 

- USB Support (Video/Picture/Audio): MPG, MPG-1, MPG-2, MPG-4, AVI, MP4, DIV, TS, TRP, MKV, MOV, WMV, RM, RMVB, JPEG, BMP Lamp: LED 100 Watt, 50,000 Hour Life

- Lamp: LED Too Watt, 30,000 Hour Life Includes Wireless Remote Control Supports International Signal Systems & Languages Working Voltage: AC 100V/240V 50/60HZ Includes Remote Control, Power Cable, VGA Cable,

- RCA Cable and Lens Dust Cover Power Consumption: 140 Watt
- Unit Dimensions: 12.99 x 10.12 x 4.13





Widescreen LED Projector with up to 140-Inch Viewing Screen, Built-In Speakers, USB Flash Reader & Supports 1080p

- Contrast: 1,200:1 3.8 x 185mm Manual Focus Lens

- Aspect Ratio: 16:9 or 4:3 Illumination Level: 2,200 Lumen Built-in USB Flash Drive Reader Screen Size: Adjustable 50 140 Inches

- Screen Size: Adjustable 50 140 Inches LED Projection Lighting Source Built-in Stereo Speakers Native Resolution: 800 x 600 Support 720p, 1080p Interface: AV(RCA), HDMI x 2,USB x 2, VGA, RCA AV, YPBPR HD, USB, & Audio Line Output USB Support (Video/Picture/Audio): MPG, MPG-1, MPG-2, MPG-4, AVI, MP4, DIV, TS, TRP, MKV, MOV, WMV, RM, RMVB, JPEG, BMP
- Lamp: LED 100 Watt, 50,000 Hour Life Adjustable Keystone to easily correct non-perpendicu
  - lar viewing screen Adjustable focus to match all viewing invironments

  - Adjustable focus to match all viewing invironments Compact light weight design Unit easily and securely mounts to ceiling Includes Wireless Remote Control Supports International Signal Systems & Languages Working Voltage: AC 100V/240V 50/60Hz Includes Remote Control, Power Cable, VGA Cable, RCA Cable and Lens Dust Cover Power Consumption: 140 Watt Unit Dimensione: 12 90 x 101 2 x 4 13

  - Unit Dimensions: 12.99 x 10.12 x 4.13
- Widescreen LED Projector with up to 100-Inch Viewing Screen, PRJD904 Built-In Speakers, USB Flash Reader & Supports 1080p
- Contrast: 1200.1

- Contrast: 1200:1 3.8 x 130mm Manual Focus Lens Aspect Ratio: 16:9 or 4:3 Illumination Level: 1,500 Lumen Built-in USB Flash Drive Reader Screen Size: Adjustable 50 100 Inches LED Projection Lighting Source Built-in Stereo Speakers Supports International Signal Systems & Languages Native Resolution: 640 x 480 Support 720p, 1080p Interface: AV(RCA), HDMI, USB, VGA, RCA AV,

- YPBPR HD, USB, & Audio Line Output USB Support (Video/Picture/Audio): MPG, MPG-1, MPG-2, MPG-4, AVI, MP4, DIV, TS, TRP, MKV, MOV, WMV, RM, RMVB, JPEG, BMP Lamp: LED 50 Watt, 50,000 Hour Life

- Lamp: LED 50 Walt, 50,000 Hour Life Includes Remote Control, Power Cable, VGA Cable, RCA Cable and Lens Dust Cover Working Voltage: AC 110V/240V 50/60Hz Power Consumption: 90 Watt

- Unit Dimensions: 8.97 x 6.53 x 3.74



Widescreen LED Projector with up to 120-Inch Viewing Screen, Built-In Speakers, USB Flash Reader & Supports 1080p

- Contrast: 900:1
- Aspect Ratio: 16:9 or 4:3 Illumination Level: 1,800 Lumen
- Built-in USB Flash Drive Reader
- Screen Size: Adjustable 50 120 Inches LED Projection Lighting Source Built-in Stereo Speakers

- Supports International Signal Systems & Languages Native Resolution: 640 x 480 Support 720p, 1080p
- Interface:AV(RCA), HDMI ,VGA, RCA AV,S-Video, &

- Interface:AV(RCA), HDMI, VGA, RCAAV,S-Video, & Audio Line Output Lamp: LED 100 Watt, 50,000 Hour Life Includes Wireless Remote Control Working Voltage: AC 110V/240V 50/60Hz Includes Remote Control, Power Cable, VGA Cable, RCA Cable and Lens Dust Cover Power Consumption: 120 Watt Unit Dimensioned: 120 Watt
- - Unit Dimensions: 12.99 x 9.45 x 4.33

Brightness: 2500 Lumens (ANSI) Color Temperature: 9300 K Up To 15 Degrees Trapezoidal Correction

Cable, Spare Fuse Runs On 110-240 V / 50-60 Hz

Supports Projector Screens From 60 to 100 Inches Includes Remote Control, Power Cable, AV Cable, VGA

Built-In Stereo Speakers



#### Portable LED Projector for Gaming TV Shows Movies and Sports at Up To 100 Inches / Supports HD Input

- Projector Uses LED Lamp For Maximum Brightness and Clarity 5 CFT LCD Panel Renders Your Video In Beautiful
- Color
- 100 Watt Lamp Lasts Up To 20000 Hours Perfect for Video Games, TV Shows, Movies or Sports

- Output Resolution: 800x600 Supports 720p and 1080p Inputs Inputs: 2 x HDMI, Component Video, VGA, S-Video, TV

#### Multimedia Home Theater Gaming Mini Projector, Supports Home PC/ PRJG45 Laptop VGA, AV and HDMI Inputs also SD and USB Flash Drives

- Projector is Perfect for Gaming and All Your Home Theater Needs
- The Bright LED Lamp Lasts Much Longer Than Conventional Lamps and Provides Excellent Picture Quality
- Connects Directly to Your DVD, Gaming Console, PC or Laptop Computer
- Multi-Function Interface: VGA, AV, SD, USB, HDMI Inputs
- Precise Manual Adjusting Focus Picture Size Ranges From 17" to 67" inches
- This Projector is Small, Portable and Light Weight
- (Only 1.01 lbs.) Low Power Consumption at 41 Watts
- 12V Vehicle Power Supply Supported, Easy To Use
- Native Resolution: 320 to 240
- Brightness: 40 Lumens
- Contrast Ratio: 300:1
- Distance: 3.3'-12.5' feet
- AC Adapter Power: 12V, 2A
- 3.55mm Stereo Audio Output
- Projector Size: 5" x 5" x 2.2" inches Powered By 12V DC or 110V 220V AC





NEW

NEW

**Projectors** 



#### **Universal Projector Ceiling Mount Bracket with Rotation & Tilt** Adjustments 100% Assembled & Quick Release Mechanism (White)

<u>a</u> a

PRJCM6

- .
- Universal mounting patterns Compatible with virtually any standard projectors Securely holds projectors weighing up to 30 lbs. (13.6 Kg)
- Unique mounting mechanism allows for angled ceiling installations (up to 60 degrees)
- Quick release mechanism for easy installation and
- fast device release
- Internal cable management system conceals and
- protects wires Perfect for the home or office
- Pitch and Roll Adjustment: -/+ 20 degrees Designed not to interfere with ventilation or cooling

 $\bigcirc$ 

- fans
- Durable and polished mounting assembly kit (Color: White)
- Unit Dimensions: 13 81 W x 13 81 D x 8 14 H

## PRJCM3

#### **Universal Projector Ceiling Mount Kit with Telescoping Height and Angle Adjustment (White)**

- Compatible with virtually any standard projectors Versatile mount extension and angle adjustment
- configurations Securely holds devices up to 17.63 lbs. (8.0Kg)
- Telescoping Height Adjustment: 11.81 25.60 Conceals and protects cables
- Perfect for the home or office
- Includes mounting hardware and accessories
- Size adjustable to ensure projector compatibility Designed not to interfere with ventilation or cooling
- fans Horizontal, vertical and height (angle and tilt)
- adjustments Durable and polished mounting assembly kit



 $\bigcirc$ 

NEW

## PRJTPS35

#### Universal Platform Projector Stand/Trolley with Height, Angle, Tilt Adjustments and Rolling Wheel Base

- Safely and Securely Position Your Projector or Other Device
- Easily Adjust and Tighten Tray Height
- Transport and Move Your with Rolling Wheel-X Base Powder Coated Surface Treatment and Durable
  - Design(4) Rolling Caster Wheels with (2) locking brakes
- Projector Tray Size: 15 x 17 Adjustable Height: 31.5 to 47.2 Projector Platform Rotation: 360°Adjustable Angle
- and Tilt: 0° ~ 15° Loading Capacity: 22 Lbs. Quick and Easy Setup
- Perfect for the Home or Office



## PRJTPS25

#### Universal Lightweight Portable Aluminum Travel Tripod Stand / Holder for Cameras, Digital Cameras, Video Cameras, etc.

- Works with Cameras, Video Cameras, Digital Cameras, etc.
- Universal Bolt Pattern Compatible with Most Standard Devices

- Built-in Alignment Level 3-Way Adjustable Pan Head (3) Individual Pivoting Section Legs Lightweight Aluminum Alloy Construction
- Quick-Lock Lever System for Fast and Easy

- Adjustments Anti-Slip Rubber Grip Leg Tips Maximum Height Setting: 42.9-Inches Minimum Height Setting: 14.1-Inches Securely Holds Devices up to 5.5 Lbs. Weight: 0.92 Lbs.
- Quick and Easy Setup
  - Portable and Perfect for Travel

#### 96" (47Hx84W) Manual Projector Widescreen Format (16:9) Screen PRJSER1696

- Format: 16.9
- View area: 47 84 Material: Matte White
- Gain: 1.1
- Best viewing angle: 120° Other specialty: Mildew Resistant/Flame Retardant/
- Surface can be cleaned Special used for: School /Business/Home Package size:5.12 X 6.3 X 94.49 G.W: 11KG
- Housing size: 3.15 X 4.72 X 79.92



NEW

## **Projector Screens & Mounts**



| Model    | Size  | Screen Dimensions |  |
|----------|-------|-------------------|--|
| PRJTP72  | 72"   | 43.3" x 57.1"     |  |
| PRJTP84  | 84''  | 50.0'' x 66.9''   |  |
| PRJTP100 | 100'' | 59.8'' x 79.9''   |  |



## Universal 72-Inch Roll-Down Pull-Down Manual Projection Screen

- Matte White Projector Screen Auto-Locking Roll Down Feature Adjustable Screen Height: Screen can be Adjusted/Stopped at any Point Projection Viewing Surface Easily Pulls Down and Retracts Black Masking Border for Optimum Image Focus and Alignment Allows for Clear and Vivid Image and Video Capture (2) Top Loops that Hook onto Screws, Nails, Bolts etc. Easy Operation and Durable Construction Designed for Ceiling and Wall Mounting Premium Viewing Surface Matt Fabric Simple Installation and Operation Perfect for the Home or Office

- Perfect for the Home or Office Pull-Down and Project
- Matte White Projection Fabric Thickness: 4.0mm

| Model     | Size  | Screen Dimensions |  |
|-----------|-------|-------------------|--|
| PRJSM7206 | 72"   | 42.5" x 56.6"     |  |
| PRJSM9406 | 84"   | 50.3" x 67.3"     |  |
| PRJSM1006 | 100'' | 59.8'' x 79.9''   |  |




## Universal Floor Standing Portable Roll-Up Pull-Out Manual Projector Screen

- Matte White Projector Screen Lightweight, Portable and Durable Fold-Out and Roll-Up Screen Style Premium Viewing Surface Matte Fabric Perfect Design for Traveling / Mobile Presentations Black Masking Border for Optimum Image Focus and Alignment Allows for Clear and Vivid Image and Video Capture Double-Sided Viewing Screen Options Simple Installation and Operation Aluminum Case Screen Housing Auto-Locking Pull Feature

- Auto-Locking Pull Feature Quick and Easy Setup Perfect for the Home or Office

| Model     | Size  | Screen Dimensions |
|-----------|-------|-------------------|
| PRJSF7208 | 72"   | 42.9" x 57.8"     |
| PRJSF1009 | 100'' | 59.8" x 79.9"     |

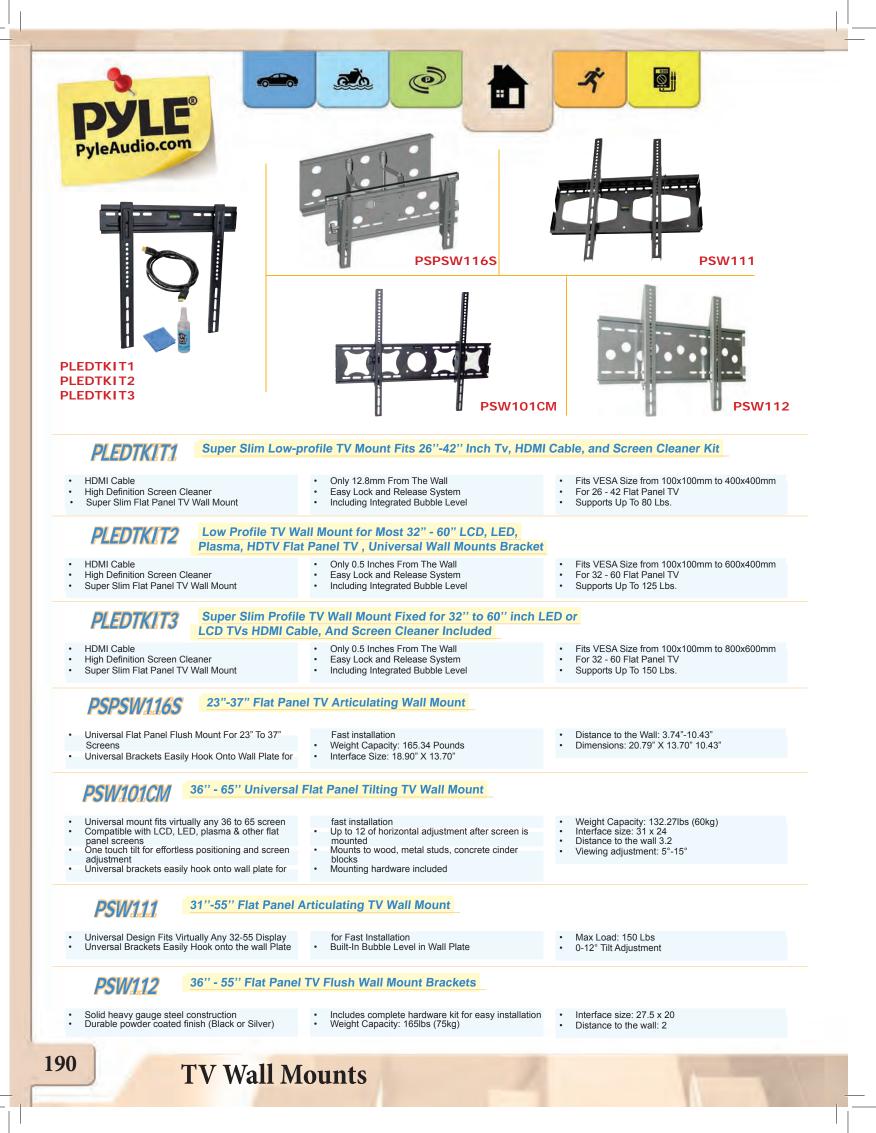




### 191

**TV Wall Mounts** 

| Pyle/                                  | YLE<br>Audio.com   |  | PSW323ST   | PSW445T  |
|--|--|--|--|--|
|  | 52551  | niversal Tilting Flat  | PSW449T  |  |
| Univers<br>Lavelin                     | ig Adjustments   | ok onto the Installation   | Max Load: 132 Lbs     Vesa: 19.7 x 15.8     Distance to the Wall: 3.3  | <ul> <li>Product Dimension: 25.8 x 16.9 x 3.3</li> <li>Package Dimension: 26.8 x 8.5 x 2.0</li> <li>Gross/ Net Weight: 9.9/7.3 Lbs</li> </ul>                                  |
| Univers<br>Compa<br>panel s<br>Univers | sal mount fits virtually atible with LCD, LED, screens                               |  | <ul> <li>Tiltable TV Wall Mount</li> <li>Tilt and Leveler System</li> <li>Built In Leveler System</li> <li>Max Load: 77.2lbs</li> <li>Vesa: 7.87 x 7.87</li> <li>Distance To The Wall:2.7</li> </ul> | <ul> <li>Product Dimension: 9.4 X 9.1 X 2.7</li> <li>Package Dimension: 18.3 X 10.6 X 9.1</li> <li>Gross/Net Weight: 35.3/26.5 lbs</li> </ul>                                  |
| Compa<br>panel s<br>Univers            | sal mount fits virtually<br>atible with LCD, LED,<br>screen<br>sal wishbone fixed mo | plasma and other flat  | TV Wall Mount<br>For fast installation<br>• Portrait or landscape viewing<br>• Built-in leveler system<br>• Max Load: 77lbs<br>• Vesa: 7.87 x 7.87   | <ul> <li>Distance To The Wall: 1</li> <li>Product Dimension: 13.6 X 10.7 X 1</li> <li>Package Dimension: 18.1 X 14.8 X9.3</li> <li>Gross/Net Weight: 25.4/23.1 lbs</li> </ul>  |
| Univers<br>Or LCE<br>Univers           | sal Mounts Fits Virtua<br>Flat Panel Screen  | "' to 36" Flat Panel<br>Ily Any 23To 36Plasma<br>pok Onto the Wall Plate | <ul> <li>Built In Leveler System</li> <li>Max Load: 132lbs</li> <li>Vesa: 15.7x11.8</li> <li>Distance To The Wall: 1</li> </ul>  | <ul> <li>Product Dimension: 17.3 X 13 X 1</li> <li>Package Dimension: 15 X 18.7 X 8.9</li> <li>Gross/Net Weight: 48.5/35 lbs</li> </ul>  |
| Univers<br>Or LCE<br>Univers           |  | lly Any 23To 36Plasma<br>ook Onto The Wall                               | Adjustments<br>• Built In Leveler System<br>• Max Load: 132lbs<br>• Vesa: 15.7 X 11.8  | <ul> <li>Distance To The Wall: 2.76</li> <li>Product Dimension: 17.3 X 13 X 2.76</li> <li>Package Dimension: 20.9 X 18.5 X 9.1</li> <li>Gross/Net Weight: 43/33 lbs</li> </ul> |
| Univers<br>Plasma<br>Univers           | saly Mount Fits Virtua<br>a or LCD Flat Panel S                                      | lly any 23 To 37   | <ul> <li>Ultra-Thin TV Wall Mount</li> <li>Max Load: 77.21lbs</li> <li>Vesa: 15.7 x 11.8</li> <li>Distance to the wall: 0.6</li> <li>Product Dimension: 15.7 x 13.0 x 0.6</li> </ul>                 | <ul> <li>Package Dimension: 19.2 x 8.2 x 1.8</li> <li>Gross/Net weight: 4.6/ 4.0 lbs</li> </ul>  |
|  | <b>V588UT</b> 32   | 2" to 50" Flat Panel<br>any 32 To 50 TVs                                 | Ultra-Thin TV Wall Mount   | Product Dimension: 23.6 x 16.9 x 0.6   |

| PSW601AT   | PSW602AT   | PSW701F   | PSW701S                     |
|--|--|---|-----------------------------|
|  |  |   |                             |
| U PSW80  | 1T PSW802  | T PS  | W974S                       |
| PSW601AT 32" to 50" Flat Pa  | nel Articulating TV Wall Mount   |   |                             |
| <ul> <li>Universal mounts fits virtually any 32 To 50Plasma<br/>or LCD flat panel screen</li> <li>Universal brackets easily hook onto the wall plate<br/>for fast installation</li> </ul>  | <ul> <li>Tilt and leveling adjustments</li> <li>Built in leveler system</li> <li>Max load: 132lbs</li> <li>Vesa: 23.6x15.7</li> </ul>                                | <ul> <li>Distance to the wall: 5.8-</li> <li>Product dimension: 28.3</li> <li>Package dimension: 30.9</li> <li>Gross/Net weight:59.4/55</li> </ul>  | :16.9x5.8<br>)x12.4x12.6    |
| PSW602AT 42" to 65" Flat Pa  | nel Articulating TV Wall Mount   |   |                             |
| <ul> <li>Universal mounts fits virtually any 42 To 65Plasma<br/>or LCD flat panel screen</li> <li>Universal brackets easily hook onto the wall plate<br/>for fast installation</li> </ul>  | <ul> <li>Tilt and leveling adjustments</li> <li>Built in leveler system</li> <li>Max load: 132lbs</li> <li>Vesa: 31.50x19.7</li> </ul>                               | <ul> <li>Distance to the wall: 5.83</li> <li>Product dimension: 36.22</li> <li>Package dimension: 39.2</li> <li>Gross/Net weight:71.1/67</li> </ul> | 2 x20.87x5.83<br>x12.6x12.6 |
| <b>PSW701F</b> 23" - 50" Flat Pan  | el Flush Wall Mount With Built In Level  |   |                             |
| <ul> <li>23" to 50" Flat Panel Flush Mount</li> <li>Adjustable Pivot Points Provide Tension Control</li> <li>Pre-Assembled for Quik Intallation</li> </ul>                                 | <ul> <li>All Necessary Hardware Included</li> <li>Max Load: 165 Pounds</li> <li>Vesa: 23.6" x 15.7"</li> </ul>   | <ul> <li>Distance to the Wall: 1.2"</li> <li>Gross/Net Weight: 8.8/5.</li> <li>Dimensions: 26.4" x 16.9</li> </ul>                                  | 5 Pounds                    |
| <b>PSW710S</b> 14" to 37" Flat Pa  | nel Triple Arm Articulating Tlit & Swive   | I TV Wall Mount   |                             |
| <ul> <li>Universal mounts fits virtually any 14to 37 Plasma<br/>or LCD flat panel screen</li> <li>Universal brackets easily hook onto the wall plate<br/>for fast installation</li> </ul>  | <ul> <li>Max load:55 lbs</li> <li>Vesa: 7.8 X 7.8 / 7.8X 3.9</li> <li>Distance to the wall:2.8- 15.6</li> <li>Product dimension: 9.8x 9.8x 2.8</li> </ul>            | <ul> <li>Package dimension: 12 x</li> <li>Gross/Net weight:7.26/5.</li> </ul>   |                             |
| <b>PSW801T</b> 23" - 50" Flat Pan  | el Tilting Wall Mount With Built In Level  | L   |                             |
| <ul> <li>23" to 50" Flat Panel Tilted Mount</li> <li>Universal Brackets Easily hook Onto the Wall Plate<br/>for Fast Installation</li> </ul>   | <ul> <li>Tilt and Leveling Adjustments</li> <li>Max Load:165 Pounds</li> <li>Vesa: 23.6" x 15.7"</li> </ul>  | <ul> <li>Distance To The Wall: 2.6</li> <li>Gross/Net Weight: 12.3/9</li> <li>Dimensions: 26.4" x 19.6</li> </ul>                                   | .0 Pounds                   |
| <b>PSW802T</b> 36" - 70" Flat Pan  | el Tilting Wall Mount With Built In Level  | L   |                             |
| <ul> <li>36" to 70" Flat Panel Tiltable Mount</li> <li>Universal Brackets Easily Hook onto the Wall Plate<br/>for Fast Installation</li> </ul>   | <ul> <li>Tilt and Leveling Adjustments</li> <li>Max Load: 165 Pounds</li> <li>Vesa: 35.4" x 23.6"</li> </ul>   | <ul> <li>Distance to Wall: 2.8"</li> <li>Gross/Net Weight: 79.37,</li> <li>Dimensions: 38.19" x 25.</li> </ul>                                      |                             |
| <b>PSW974S</b> 26" to 42" Flat Pa  | nel Articulating TV Wall Mount   |   |                             |
| <ul> <li>Universal Mounts Fits Virtually Any 26 To 42<br/>Plasma Or LCD Flat Panel Screen</li> <li>Universal Brackets Easily Hook Onto The Wall<br/>Plate For Fast Installation</li> </ul> | <ul> <li>Tilt and Leveling Adjustments</li> <li>Built In Leveler System</li> <li>Max Load 88lbs Vesa: 15.7 X 11.8</li> <li>Distance To The Wall: 4.9-14.8</li> </ul> | <ul> <li>Product Dimension: 17.3</li> <li>Package Dimension: 20.</li> <li>Gross/Net Weight: 39.7/3</li> </ul>                                       | I X 19.7 X 8.5              |
|  | Ϋ́   | V Wall Mounts   | 19                          |

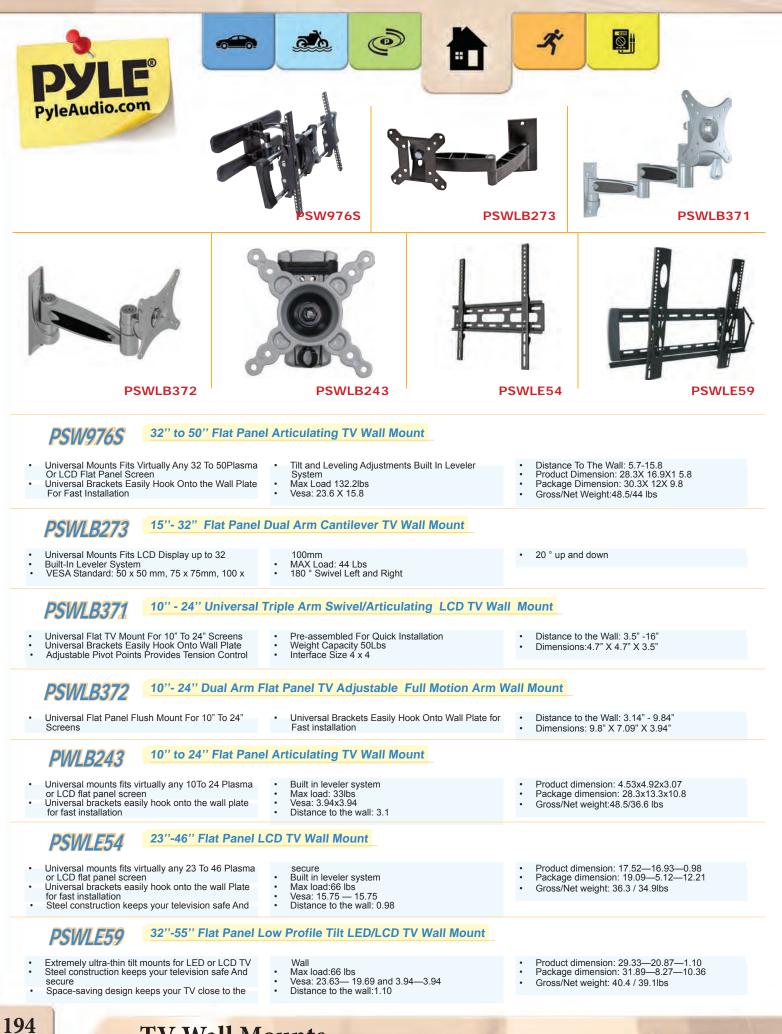

**TV Wall Mounts** 

| Image: State of the state of   | PSV                        | ¥<br>531XLT  | PSW611MUT      |
|--|----------------------------|--|----------------|
| PSW651LT1  | PSW658MF                   | P  | SW661LF1       |
| <ul> <li>Universal Flat Panel Flush Mount For 14" To 37"<br/>Screens</li> <li>Universal Brackets Easily Hook Onto Wall Plate for</li> <li>Fast installation</li> <li>Weight Capacity: 77.16</li> <li>Interface Size: 9.84" x 4</li> </ul>  | Pounds<br>11.81"           | Dimensions:13.39" X 1  | 11.26" X 2.36" |
| <ul> <li>Universal TV Mount - fits virtually any 50 the latest Plasma, LED, LCD, 3D, Smart &amp; 10 the latest</li></ul> | other flat panel TVs       | <ul> <li>Product dimension: 40</li> <li>Package dimension: 4</li> </ul>                                  |                |
| <ul> <li>Universal TV Mount - fits virtually any 50<br/>the latest Plasma, LED, LCD, 3D, Smart &amp;</li> <li>Universal brackets easily hook onto the wall plate<br/>for fast installation</li> <li>Tilt and leveling adjustments</li> <li>Built in leveler system</li> <li>Max load: 176lbs</li> <li>Vesa: 31.5x23.6</li> </ul>   |                            | <ul> <li>Distance to the wall: 3</li> <li>Product dimension: 40</li> <li>Package dimension: 4</li> </ul> | .2x24.8x3.1    |
| <ul> <li>Universal TV Mount - fits virtually any 32<br/>the latest Plasma, LED, LCD, 3D, Smart &amp;<br/>D / Interactive TV</li> <li>Gas spring inside,providing fluid,light-touch<br/>adjustments</li> <li>Bulli tin leveler system</li> <li>Max load: 22-55 lbs</li> <li>Vesa: 15.7x15.7</li> <li>Distance to the wall: 2.9</li> </ul>   | other flat panel TVs       | <ul> <li>Product dimension: 17</li> <li>Package dimension: 1</li> </ul>                                  |                |
|  | unt - fits virtually any 3 |  | 4              |
| <ul> <li>Universal mounts fits virtually any 37 to 55<br/>Smart/3D/Interactive TV.</li> <li>Gas spring inside, providing fluid, light-touch</li> <li>Built in level system</li> <li>Max load: 44-77 lbs</li> <li>Vesa: 23.6 x 15.7</li> </ul>  | " to 55" TVs including     | Product dimension: 30  |                |
| <ul> <li>Universal mounts fits virtually any 32 To 55 Plasma<br/>or LCD flat panel screen</li> <li>Universal brackets easily hook onto the wall plate<br/>fast installation</li> <li>Built in leveler system</li> <li>Max load: 77 lbs</li> <li>Vesa: 23.6 x 15.7</li> <li>Distance to the wall: 1</li> </ul>  |                            | <ul> <li>Product dimension: 25</li> <li>Package dimension: 2</li> </ul>                                  |                |
| Diversal TV Mount - fits virtually any 37<br>the latest Plasma, LED, LCD, 3D, Smart &<br>Universal mounts fits virtually any 37 To 55 Smart /<br>3D / Interactive TV<br>Wesa: 23.6 x 15.7<br>Vesa: 23.6 x 15.7   | other flat panel TVs       | <ul> <li>Product dimension: 30</li> <li>Package dimension: 2</li> </ul>                                  |                |
| Bulit in leveler system     Distance to the wall: 2.3  |                            | all Mount  | s 195          |





Universal Articulating TV Wall Mount - fits virtually any 50" to 80" TV including the latest Plasma, LED, LCD, 3D, Smart & other flat panel versions

- Universal mounts fits virtually any 50 to 80 plasma or
- LCD flat panel screen. Universal brackets easily hook onto the wall plate for
- fast installation. Tilting and level adjustments
- Built in level system Max load: 176 lbs Vesa: 31.5 x 23.6
- Distance to the wall: 6.3-24
- Product dimension: 36.2 x 24.8 x 6.3



#### 36" - 55" Flat Panel TV Tilting Wall Mount PSXPT003M

- Universal Mounts fits virtually any 36 to 55 plasma/ LCD flat Panel Screen One Touch tilt for effortless positioning and
- adjustment of the screen Up to 12 of horizontal adjustment after screen is
- mounted Mounts to wood/Metal studs, concrete cinder blocks
- Universal brackets easily hook onto wall plate for fast
- Universal brackets easily nook of installation Weight Capacity: 165lbs (75kg) Interface size: 28 x 19 Distance to the wall 2.95

- Viewing adjustment: 5°-15°



## PHDMIKT1

HDTV Audio/Video Cable Connection Kit Compatible w/ Plasma, LCD/LED/DLP/DVD and Audio Players

- 1@6ft Toslink Cable 1@6ft S-Video Cable, Gold Plated 1@6ft HDMI To DVI Male Adaptor, Gold Plated
  - PACKED COLOR GIFT BOX



## PHDMIKT2


HDTV Cleaning kit w/ 2 HHDMI High Definition Cables/Component Video High Definition Cables/Optical Audio Hi-Def Cable

2@ 6ft Gold HDMI Cable, Gold Metal Plug, With Braids

1@6ft AV Cable (3r-3r), Gold Plated 1@6ft Component Cable(3r-3r), Gold Plated 1@6ft Audio Cable (2r-2r), Gold Plated 1@6ft HDMI Cable, Gold Plated

- 1@ 6ft Gold Component Cable, Gold Metal Plugs, With Braids
- 1@6ft Toslink Cable, Gold Metal Plugs, With Braids 1@Screen Cleaner With Clothes
- PACKED BLISTER PACKING



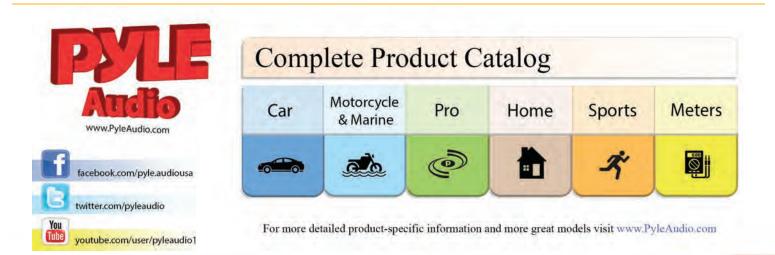

Wall Mount & Connection Kits



PHDMF1 **Single HDMI Wall Plate** 



PHDM2RB2 HDMI/Mono RCA Audio **Coaxial/Dual Ethernet** 



PHDMF2 **Dual HDMI** 



ā.a

PHDMRB2 **Dual HDMI Wall Plate 90 Degree Exit Ports** 



PHDMIW1 Single HDMI Wall Plate **90 Degree Exit Port** 

x

0



PHDMRBC2 HDMI/Stereo (Dual) **RCA Audio Combo** 



PHDM2RJRF1 HDMI/Mono RCA Audio **Coaxial/Dual Ethernet** 

0



PHDMRBC3 HDMI/3 (RGB/RCA) **Component Combo** 





.

- HDMI jack and RGB jack wall Plate Feed-Thru HDMI Wall Plate .
- Designed For In-Wall HDMI Cable Routing For

PHDMRCF3

- Commercial Or Residential
- Commercial Or Residential Suitable For Home Theater Hi-Def Installs Delivers High-Bandwidth, Uncompressed Video And Multi-Channel Digital Audio Between HDMI Compliant Devices Including DVD Player / Recorders, Set-Top Boxes And Digital TVs Supports High Resolution Display Up To 1080p
- HDMI Female To HDMI Female Ports
- Use with RGB Component Video Cables (3) Gold plated Color-Coded RCA Jacks (Red/Green/ Blue)
- Provides wall mounted RGB/RCA connection for one
- device to your video system Mounts to Standard Electrical Box
- High Impact ABS Plastic
- Attractive Decora style white wall plate

## PHIW71

- 7.1 Home Theater Fourteen Post Binding/Banana Plug with Dual RCA Subwoofer Posts Wall Plate White (14 Posts/Polarity for 7 Speakers)
- Provides Wall Mounted Wire Connection For Seven Speakers To Your Stereo System
- Seven Speaker Wall Mount Clean Wire Connection In-Wall Speaker To Amplifier Connection 14 Gold Plated, Color Coded(+/-) Terminals
- Banana Plug Compatible Dual Sub-Woofer RCA Line-Level Connection.
- Mounts To Standard Electrical Box .
- Attractive Decora Style White Wall Plate

.).) .).) .... 

.



#### **PSP To HDMI Converter With Up-Scaling (Full Screen)**

Input: 1 X PSP In (Component Video And Audio From PSP Pass Through A VGA Interface) Output: 1 X HDMI, 1 X 3.5mm Audio

Resolution 480P To HDMI 720P, Offering You HD Video Game

- It Achieves Full-Screen Display Of Sony Playstation Portable On HDTV And HD LCD, While Normal Conversion Or Direct Connection Can Not Be Done It Is With Up-Scaling Function Up-Scales PSP Output
- Technology Is Applied To Make The Converted Picture Richer In Color More Vivid And Free From Flicker Or Delay For Fast-Moving Video HDMI Output: 720P @ 60Hz Compatible With All Kinds Of HDMI Displays Product Dimension: 4.3(L) X 3.3(W) X 1.1(H)

Motion Compensated 3D Wavelet Video Coding

- .
- .
- AC Adapter 110/220V Included



## Wall Plates (HDMI / Multi Component)



#### 5.1 Channel 350 Watt Digital Home Theater AM/FM Receiver Surround Sound Package w/ Subwoofer/Center Channel & 4 x Two Way Directional Satellite speakers

- •
- 5.1 Channel Amplifier Built-In AM/FM Radio 2 MIC Input, Treble & Bass of MIC Adjustable,
- Independent MIC Volume Control Over Current Protection, Short Circuit Protection &
- Over Voltage Protection 12 Preset Radio Station
- Full Remote Control
- VFD Display Power Input: AC 115V 60Hz/230V 50Hz
- Power Output: 300W L,R Channel (4 Ohm); 50W for
  - Center, Surround L & Surround R (4 Ohm) In-Out Selector: 3 Stereo RCA Inputs, AM/FM Radio,
- 1 DVD Input, 2 Microphone Inputs Output: 5 Channel Speaker Output Terminal for Left, Right, Center, Front Left, Front Right & Subwoofer Net Weight: 40.0 Lbs Gross Weight: 46.3 Lbs
- Dimensions: 25.2 x 20.3 x 16.5



#### 400-Watt 5.1 Channel Home Theater System with AM/ FM Tuner, CD, DVD & MP3 Player Compatible

- THD: 0.1%

PT628A

- S/N Ratio: 85dB Digital VFD Display DVD & CD Compatible MP3 & MP4 Compatible 400 Watts Total Power

- Gold Capped A/V Cables & Wires Subwoofer: 150 Watts, 10 Long Throw Driver Control EQ, All Functions From Remote Control Receiver Includes Amplifier, Pre-Amp, AM/FM Tuner
- Satellites and Center Speaker: 250 Watts (5x50 W), 3
- Frequency Response: Satellite 150Hz-20kHz, Subwoofer 50Hz-330Hz
- Satellite Speaker Dimensions: 5.89 x 2.75 x 8.84
- Center Channel Dimensions: 5.89 x 2.75 x 14.14
- Subwoofer Dimensions (DxWxH): 16.50 x 14.54 x 11.00
- Gross Weight: 36.4 Lbs.



## PT678HBA

400 Watts 5.1 Channel HDMI Home Theater System With Bluetooth Audio Playback, AM/FM Tuner

2 HDMI Digital Inputs, 1 Digital HDMI Output 3D Pass-Thru HDMI Technology Bluetooth Audio Playback - Stream From Your

iPhone, iPad, iPod, Android Receiver Includes Amplifier, Pre-Amp, AM/FM Tuner

400 Watts Total Power Subwoofer: 150 Watts, 10 Long Throw Driver Satellites and Center Speaker: 250 Watts (5x50 W), 3

- Gold Capped A/V Cables & Wires MP3 & MP4 Compatible DVD & CD Compatible
- Frequency Response: Satellite 150Hz-20kHz, Subwoofer 50Hz-330Hz S/N Ratio: 85dB
- THD: 0.1%
- Subwoofer Dimensions: 16.50D x 14.54W x 11.00H

7.1 Channel Home Theater System with Satellite Speakers,

- Satellite Speaker Dimensions: 5.89D x 2.75W x 8.84H
- Center Channel Dimensions: 5.89D x 2.75W x 14.14H

# Control EQ, All Functions From Remote Control Digital VFD Display

Center Channel, Subwoofer, Bluetooth, FM Tuner



## PT798SBA

THD: 0.1%

Drivers

- S/N Ratio: 85dB Digital VFD Display
- DVD & CD Compatible MP3 & MP4 Compatible

- Sol Wart's Total Power Gold Capped A/V Cables & Wires Subwoofer: 150 Watts, 10 Long Throw Driver Control Eq. All Functions From Remote Control Receiver Includes Amplifier, Pre-Amp, FM Tuner

#### Bluetooth Audio Playback - Connect To iPhone, iPod,

- Android Satellites and Center Speaker: 350 Watts (7x50 W), 3
- Drivers Frequency Response: Satellite 150Hz-20kHz,
- Subwoofer 50Hz -330Hz Subwoofer Dimensions (DxWxH): 16.50 x 14.93 x 10 22
- Satellite Speaker Dimensions: 5.50 x 5.50 x 11.39
- Center Channel Dimensions: 9.23 x 4.71 x 3.06

## PHS51P

#### 5.1 Home Theater Passive Audio System Four Satellite, Center Channel & 10Subwoofer

- 200 Watt Subwoofer with Built-in Crossover Network
- 10 Long Throw Subwoofer Driver Subwoofer Efficiency: 88db Speaker
- Impedance (Satellite/Center/Sub): 8 Ohm Magneti-cally

- cally Shielded Center Channel Satellite/Center Frequency Response: 150Hz 20Khz Subwoofer Frequency Response: 50Hz 330Hz Satellite/Center Speaker Size: 3
- Subwoofer Speaker Size: 10 Piano Black ABS Plastic Satellite & Center Channel Piano Black Wooden Subwoofer Enclosure Satellite
- Speaker Dimensions: 6.3H x 4.7W x 3D Center Channel
  - Speaker Dimensions: 3H x 9.2W x 4.7D Subwoofer Speaker Dimensions: 14.3H x 7.87W x
    - 20.6D Piano Black Finish



**Home Theater Systems** 



#### 2.1 Multi-media Audio System System Power (MAX):100 Watts PSB6AI

#### atellite:

- 2-way Hi-Fi speaker system 4 midwoofer with shielded magnet design
- 13mm mylar dome tweeter with shielded magnet
- design 6 dB/Oct Crossover for Hi-pass

- 6 dB/Oct Crossover for Hi-pass Frequency range: 100~21KHz MDF with PVC striffen finish enclosure Fast-On spring terminal 5.3(W)x4.92(D)x7.87(H) Subwoofer: 6.5 High Power subwoofer, 8 Ohms, with Shielded Woofer Magnet: 11 Oz Ferrite Frequency range: 30~120KHz MDF with PVC striffen .nish enclosure

- 5.3(W)x4.92(D)x7.87(H) Amplifer: 10 Watts x 2 RMS @ 8 Ohms (20Wx2 dynamic power) for satellite 30 Watts RMS @ 8 Ohm (60W dynamic power) for
- subwoofer Total Harmonic Distortion< 0.5%

- Signal to Noise Ratio >84dB Standby Power:=1W Source: iPod / DVD RCA / TV RCA / Game RCA / Video
- Power supply: +19VDC, 3.2A, 100V-239V AC Remote: IR Card Remote Control
- System Weight: 14.33 lbs



#### 5.1 Home Theater Speaker System With Active Subwoofer and Five Satellite Speakers

- 100W Active Subwoofer with Built-In Auto-Gain Control Stereo RCA Line-In Input Stereo RCA Line-Out 10 Long Throw Driver

- Crossover Slope Adjusted to 80Hz Impedance: 4-8 Ohms Magnetically Shielded Center Speaker
- S/N Ratio: 85dB THD: 0.1%
- Output power: Subwoofer 100W

- Frequency Range: Satellites 150Hz-20kHz, Subwoofer 50Hz-330Hz Drive Unit: Satellites 3 Inch, Subwoofer 10 Inch
- Subwoofer Dimensions (DxWxH): 7.9 x 20.7 x 14.4 L,R Channel Dimensions: 3.1 x 4.7 x 6.3 Surround Channel Dimensions: 3.1 x 4.7 x 6.3

- Center Channel Dimensions: 9.3 x 4.7 x 3.1 Materials: Satellites Plastic, Subwoofer Wood
- Weight: 35.3 lbs
- Color: Piano Black Lacquer Finish



PSB901

iPhone/iPod 2.1 Soundbar Docking System with Aux-In and Video Output

- Play and Charge Your iPod or iPhone RCA L/R Audio-In Jacks for Stereo Connection 3.5mm Aux-In Jack for MP3 Player Connection Full Function Remote Control
- Composite Video Output For Playing Videos on TV 2x10W Output + 30W Subwoofer
- Bass Control
- Unit Dimensions: 4.75H x 7D x 40L



*PSBV100* 

5-Way Soundbar System With FM Radio, SRS 3D Sound, Four Auxillary Inputs (Piano Black)

**Home Theater Systems** 

- Runs On 110 V Power .

- Runs On 110 V Power S/N (A Weight): 80dB SRS 3D Sound Technology Speaker Impedance: 8 Ohm Power Supply: AC~120V, 60Hz Fully Functional Remote Control Piano Black Wood-Crafted Finish THD (1kHz, 1W, 8 Ohm): 0.5% FM Radio with 30 Station Presets
- Input Sensitivity: 400mV(±) 50mV Frequency Response: 20Hz 20KHz Channel Separated Rate(1kHz): 40dB Max Output Power: 150 Watt (75 W x 2) Three Auxillary RCA Inputs, One 3.5mm Auxillary Input
- Input 5-Way Sound: One 5.25 Woofer, Two 3 Full Range
- Speakers, Two 1 Tweeters Dimensions: 23.6 x 9.8 x 4.7





#### 300 Watt Bluetooth Soundbar w/USB/SD/FM Radio & Wireless Remote

- Piano-Black Finish Wooden Case & Front Panel Blue Backlight LCD Display Bluetooth Wireless Audio Steaming capability from
- Most Bluetooth enabled devices USB 2.0 Host & SD/MMC for external moving Hardrive/Flashdrive. Plays MP3, & WMA Music
- Formats
- Formats Aux1, Aux2, PC/MP3 Audio Inputs Source Selection, Play/Pause/ Bluetooth/Standby/
- Volume +I-On board Control 5 Speaker Total: 1 x 5.25 Mid Woofer, 2 x 3 Full Range Speaker, & 2 x 1 Vocal Tweeter Wireless Handheld Remote Control
- .

PSBV400

Preset stations.

- Frequency Response: 20Hz-20KHz Input Sensitivity: 800mV S/N Ratio:>70dB Channel Seperation Rate (1kHz):>40dB Power Output: 300 Watts Peak / 150 Watts RMS
- Woofer Impedance: 8 Ohm Tweeter & Full Range Speakers: 4 Ohm THD (1kHz,1W,8Ohm):<0.5% Bluetooth Version 2.0+EDR Deverse Outster DO (10)//0 54

6-Way 300 Watt Multi-Source Wall/Shelf Mount Sound Bar w/USB, SD, MP3, FM Tuner

- Power Supply: DC 18V/2.5A Unit Dimensions: H: 4.7 x W: 9.8 x L: 23.8
- Unit Weight: 11.7 LBS



- Piano black finish painted wooden case, front panel with blue backlight LCD display. 300 Watts Peak Output/ 150W RMS Output
- - FM stereo radio with auto search and can store 30 USB 2.0 host and SD/MMC connector for external moving HD, flash drive, SD/MMC card, can play MPEG1 (dat, mpg), MPEG2 (vob,mpg), MPEG4 (avi, divx, xvid) movies, MP3, WMA, WAV, AC3 music and
- JPEG/JPG photos. CD, AUX1, AUX2, PC/MP3 INPUTS. RCA video input and video output to transfer your DVD video to TV set. 2 x 4 woofer, 4 x 3 full range speaker. With wireless remote control. With integrated wall mount. Unit dimensions: 5.6 H x 5.6 W x 39.4L Unit weight: 22 5 be
  - Unit weight: 22.5 lbs



### PHST80IP

#### 2.1 Channel Sound Tower System - Works with All iPods, iPads & iPhones

- THD: 0.1% Alarm/Clock Control 2.1 Channel Amplifier 600 Watts Output Power

- Component Video Output 85 dB Signal Ratio Range
- Full Function Remote Control

- Independent Channel Control Dimensions (WxDxH): 9.4 x 11.4 x 39.4 Output Power: L/R 12W, Subwoofer 26W Drive Unit: L/R Channel 2 x 3, Subwoofer 5
- - Frequency: L/R 150Hz-20KHz, Subwoofer 50Hz-280Hz

PHIT84BK

iPod/iPhone 2.1 Tower Docking Speaker System with FM Radio

Play and Charge Your iPod or iPhone RCA L/R Audio-In Jacks for Stereo Connection 3.5mm Aux-In Jack for MP3 Player Connection

Tune FM Radio With 20 Presets

- Full Function Remote Control
  - Composite Video Output For Playing Videos on TV 2x10W Output + 30W Subwoofer
- Bass Control



- Bluetooth 2.0 (A2DPV Support) Play And Stream Your Music From Any Bluetooth
- Device
- RCA L/R Audio-In Jacks for Stereo Connections (2 Pairs)
- 3.5mm Aux-In Jack for MP3 Player/Smartphone Connection
- USB Flash & SD Card Readers for Audio Playback
- 2 x 60W Output + 120W Subwoofer EQ Audio Settings Adjustments Tune FM Radio with 20 Presets LCD Control Panel Display

- Remote Control Included Power: AC-110V

NEW

## **Home Theater Towers**



- iPod/iPhone/MP3/AUX Input Built-in FM Radio With Memory
- Alarm Clock Control and Time 2.1 Channel amplifier Real 2.1 Channel output Full Function Remote Control

- Full Function Remote Control Independant Control of Each Channel iPod Can be Controlled Through Remote iPod Charged Automatically Touch Key Control System LCD display Output power:600 Watts L (150Watts x 1) R (150Watts x 1) Subwoofer (300Watt) Frequency: L,R 150Hz-20kHz Subwoofer 50Hz-180Hz Mid Range Driver:Dual 3.5 Inch Tweeter:Dual 3.5 inch Subwoofer: 8 inch S/N: 85dB

- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior Power: DC 21 Volts w/ 110V Adapter
- Dimensions: 11.5"D x 15.2"W x 41.75"H

PHST92IBGL





PHST92IBGL

PHST92IBGL



## **Home Theater Towers**

202



#### iPod iPhone4 4S Dock with wireless Speakers with Aux Input For PIWPD3 All Other Mp3 Players / Android Phones Amd iPhone 5

- Compatible player and charger for iPod/iPhone
- 2 Wireless Speakers with Built-In Rechargeable Lithium Batteries

- 3 Transmission Channels for Low Interference Speaker Power: 2x3 Watts 30 Meters (100 Feet) Transmission Range
- Volume Control Button on Each Speaker Changable Color Light on Each Speaker 3.5mm Aux-In Jack
- Video Out
- Automatic Tuning On Speakers
- Remote Control and 110-240V AC Adaptor Included





#### Digital 2-Way Stereo Speaker System for iPods, iPads & iPhones, 300 Watt Power, Remote Control & Line-In

- Charges Your Apple Device When Docked Fully Functional Wireless Remote Control Output Power: 300 Watt Max, 150 Watt RMS Connect Any Digital Music Player Via 3.5mm Jack Compatible with Most iPad, iPod & iPhone Models
- Use Component Video Output to Play Video on Your TV
- Full-Range Sound: Dual 5 Woofers & Dual 3/4
- Tweeters Frequency Response: 150 Hz - 20 kHz. S/N Ratio: 85
- dB
- THD: 0.1%. Weight: 13 Lbs.



## PICL36B

iPod iPhone Dock Clock Radio with FM Radio, LED Nightlight, Dual Alarm Clock & AUX Input for Samsung Galaxy, iPhone 5 and Other Devices

- Backlit Illuminated LCD Display Apple 30 Pin Connector Compatible with iPhones & iPods
- Set Wake Up Alarm to Play Your iPod/iPhone, Radio, Buzzer 4 Level Brightness Adjustable LED Nightlight FM Stereo Radio with PLL Digital Tuning System Easy Push Button Controls

- Play, Pause, Stop, Forward, Backward, Skip, Search,
- Volume +/-3.5mm AUX-IN Jack for Connecting External Devices 12/24 Hour Clock Display .
- 2.25 Full Range Speaker Enjoy up to 20 Station Presets Clock Back Up Battery (1 x CR2025 Battery Included) 120 Minute Sleep Mode/ Snooze 9 Minute with level Dimmer
- Includes Remote Control & AC/DC Adaptor 100~240V
- (12V1.5A) Apple 30 Pin Connector(5V1A) Compatible with
- 30-Pin Devices: iPhone(3G/3GS/4G/4GS) iTouch(2Gen/3Gen/4Gen) Nano(1Gen/2Gen/3Gen/4 Gen/5Gen/6Gen)
- Dimensions: 5.51L x 7.40H x 3.44W



iPod / iPhone / iPad Docking Systems



- Compatibility: iPod Mini 1G; iPod Nano 1G/2G/ /3G/4G/5G/iPod 3G/4G/5G/5.5G/6G/ iPod Touch(Generation 1 & Generation 2 ) iPhone Aux Input Jack Allows Connection of Other Audio Devices, Such As MP3 and CD Players, Desktop Computers, Satellite Radio and Laptops Includes AM/FM Radio, Clock, Alarm, And RF Remote With Full IPod Naviation
- With Full IPod Navigation Radio Memory Station: AM 9 Station / FM 9 Stations sleep timer 5MIN/15MIN/30MIN
- Alarm Allows One To Wake Up To An iPhone, iPod,
- AM/FM Radio, Or Buzzer Fully Function Remote Control LCD Display Equalizer Function Control Automatic Gain Control

- SRS-3D Level Control Color: Black
- Dimensions: 9.45" D 14.4 W 4.88 H Weight: 8 LBS; Total Power Output: 200 Watts

- Power Source: 18V, 1.6A 110V



#### 200 Watts High-Performance 2.1 Channel AM/FM Clock Radio Speaker With IPod / Iphone Docking Station(White)

- Compatibility: iPod Mini 1G; iPod Nano 1G, 2G, 3G,4G, 5G; iPod 3G, 4G, 5G, 5.5G, 6G; iPod Touch(Generation 1 & Generation 2); iPhone Aux Input Jack Allows Connection of Other Audio Devices, Such As MP3 and CD Players, Desktop Computers, Satellite Radio and Laptops Includes AM/FM Radio, Clock, Alarm, And RF Remote With Full iPod Navigation
- With Full Pod Navigation Radio Memory Station: AM 9 Station / FM 9 Stations sleep timer 5MIN/15MIN/30MIN
- Alarm Allows One To Wake Up To An iPhone, iPod, AM/FM Radio, Or Buzzer
- Fully Function Remote Control LCD Display
- Equalizer Function Control Automatic Gain Control SRS-3D Level Control
- Color: White

IPod/ITouch/IPhone Audio Docking Portable Speaker System

- Dimensions: 8.16D 9.45W 4.88H
- Weight: 8 LBS;
- Total Power Output: 200 Watts
- Power Source: 18V, 1.6A 110V

### *PIPDSP20*

- High Grade Speaker and Digital Amplifier for Superior Sound Quality Side Air Vent for Optimal Bass Elegant Cloth with Aluminum Trim Panel Design Slide Out Rear Stand for Added Support and

- Comfortable Use
- Side Up Back Support for Extra Safe Device Docking/ Support
- Plays and Charges most iPods, iPod Touch and
- Plays and Charging to rice and the provided of the provided of
- Total Power Output: 15 Watts



PIDOCK1

Universal iPod/iPhone Docking Station For Audio Output Charging - Sync W/iTunes And Remote control

- Dock Station With Remote For iPods Listen To Your Music On Your Home Stereo System Synchronize With Itunes On Your Personal Computer
- Stereo Audio Out
- Remote Control System Includes Audio and Charging Cablesli>Power Source
- Voltage: 100-240v 5V Output



## iPod / iPhone / iPad Docking Systems





#### Universal iPod/ipad/iPhone Docking Station For Audio Output Charging - Sync W/iTunes And Remote control

- Conveniently dock & charge your iPhone, iPad, or iPod
- Control the music with the included wireless remote control
- Using the USB port, sync with iTunes while your device is connected
- Stereo audio out (3.5mm jack)

- Construction material: Plastic Power Source Voltage: 100-240v 5V Output
- - Dimensions: 3.77 x 2.13 x 0.83



iPad Not Included



Universal iPod/ipad/iPhone Docking Station For Audio & Video Output Charging - Sync W/iTunes And Remote control

control

Conveniently dock & charge your iPhone, iPad, or iPod Using the USB port, sync with iTunes while your device is connected

Stereo audio out (3.5mm jack) Control the music with the included wireless remote

- Component video output
- Construction material: Plastic Voltage: 100-240 5 Volt Output
  - Dimensions: 3.77 x 2.13 x 0.83



222

iPhone Not Included

### PIPADK3

#### Universal iPod, iPhone & iPad Multimedia Entertainment Docking Station with Remote Control (Black)

- Compatible with all iPods, iPhones & iPads (lightning to 30-pin adapter not included) Stereo Audio Output Component Video Output

- USB Host/Device Control HDMI Output Mini USB Port

- Standard USB Port
- Vireless Remote Control Included Connect and stream media directly to your TV
- Voltage: 100-240v 5V Output Size: 5.5" W x 3.9" D x 1.2" H

PBTR20

#### Universal Mini Bluetooth Transmitter with 3.5mm Headphone Input

- Broadcast Bluetooth Audio Transmissions from Devices That do Not have Bluetooth
- Wirelessly Transmits Audio Streaming Sound from Your Stereo Device to Any Bluetooth Enabled Receiver, Headphones or Speakers Transmit Music and Sound from Your TV, iPod, Tablet,
- Mp3 player or Any Other Device that Does not Have Bluetooth
- Compatible with Any Stereo Device with 3.5mm Headphone Jack, Such as TV/PC/CD/iPod/MP3/MP4
- etc.
- Enjoy Your Music Without the Restriction of Wires Watch Your TV Quietly and Wirelessly in Full Stereo Transmitter will Automatically Search for Bluetooth

- Stereo Receiver and Finish Connection Every Time the Transmitter is Switched on, it Will Automatically Connect to Last Connected Device. Transmitter will Automatically Switch Off if no Devices Can be Connected Within 5 Minutes.
- Portable Bluetooth Stereo Transmitter Powered by
- Will Broadcast Wirelessly up to a Range of 32' feet Bluetoth Version 2.1 Working Time: 5-7 Hours Charging Time: 2-3 Hours Standby Time: 168-240 Hours Dimensions: 2.13"x 0.98"x 0.43" inches

- Weight: .35 oz.

- PBTR30
  - for Call Answering, 3.5mm Jack, and Rechargeable Battery
- Connect to any Stereo or Speaker System with 3.5mm Jack to Enable Bluetooth Audio Streaming
- Play and Control Music Wirelessly from Your iPod/ MP3 Player, iPhone/Smartphone, iPad etc. Works with Headphones, Home Theater System, Car
- Stereos etc. Can be Controlled with All Bluetooth Enabled Devices
- Built-in Mic for Hands-Free Calls
- Excellent Wireless Signal Range Supports A2DP Stereo Bluetooth For Superior Music Quality

Bluetooth Receiver Adapter with Streaming Audio and Built-in Microphone

- Charging Jack: Mini USB (DC 5V) Built-In Rechargeable Battery AUX 3.5mm Cable (Included) LED Indicator Light Technical SpecsBluetooth Version: Bluetooth V3.0 Working Range Up To: 35 Feet Standby Time: 144-192 Hours Working Time: 6 8 Hours Charging Time: 1-2 Hours Dimension: 2.12 x .98 x .43 Weinbt: 8n

- Weight: 8g



PALE

0

NEW



#### Bluetooth A2DP Streaming Audio Interface (Music/Audio) Receiver Adapter for 30-Pin Apple iPod/iPhone/iPad Docking Station

- Easily add Bluetooth wireless streaming to your speakers, stereo system or docking station Works with and enables Bluetooth for devices like iPads, iPods, iPhones, Androids, Blackberry, PCs, Video game consoles, Bluetooth Cell Phones & much more
- Extends the range from which you can play music via Bluetooth connection
- 3.5mm/1/8 Aux input allows the connection of additional devices
- Additional devices Connects to Apple 30 Pin Docks 3 Level LED illumination to confirm visual Bluetooth Interface(Red/Blue/Flashing Blue) Control your music wirelessly throughout your home
- Transmission distance: up to 10 meters (33 feet)
- Unit Dimensions: 2.15H x 2.15W x 0.45D



PBTR70

Bluetooth Mini Speaker with Hands-Free Call Answering and Music Streaming, AUX-In, 8 Hour Playback (Black)

- Built-in Bluetooth Technology Enjoy Call Answering, Hands-Free Talking or Stream Music Compatible with all Bluetooth-Enabled Devices

Works with iPhone, iPad, Android, BlackBerry, MP3 Players, Tablets, etc.

Connect to Virtually Any Audio Device via AUX 3.5mm

- Integrated Stereo Sound with Rich Bass Response Includes USB Charging Cable Rechargeable Lithium-Ion Battery Battery Life: 8 Hours Control Song Selection and Volume Wirelessly

- Durable Aluminum Alloy Body



PBTR70

PBS2SL

Input

#### Bluetooth Mini Speaker with Hands-Free Call Answering and Music Streaming, AUX-In, 8 Hour Playback (Silver)

- Built-in Bluetooth Technology Enjoy Call Answering, Hands-Free Talking or Stream Music
- Compatible with all Bluetooth-Enabled Devices Works with iPhone, iPad, Android, BlackBerry, MP3 Players, Tablets, etc.
- Connect to Virtually Any Audio Device via AUX 3.5mm Input
- Integrated Stereo Sound with Rich Bass Response
- Includes USB Charging Cable Rechargeable Lithium-Ion Battery
- Battery Life: 8 Hours Control Song Selection and Volume Wirelessly
- Durable Aluminum Alloy Body



**Bluetooth Receivers / Speakers** 



#### Bluetooth Mini Cube Speaker With Handsfree Phone Function, Aux-In, 8 Hours Of Playback

- Bluetooth Wireless Module Compatible With Many
- Smartphones iPhone, iPad, Android, BlackBerry, All Bluetooth-Enabled Music Players
- Supports Bluetooth Stereo For Rich Sound And Superb Bass Response
- Rechargeable Lithium-Ion Battery Lasts Up To 8 Hours, Charges Via USB
- Play, Pause, Previous, Next Functions Over Bluetooth Connect Virtually Any Audio Device Via 3.5mm Aux-In Jack
  - Constructed From Durable Aluminum Alloy Bluetooth Profiles Supported: A2DP, AVRCP

Answer Calls With Bluetooth Hands Free Function

Color: Black Dimensions: 2.4 H x 2.4 W x 3.2 D



Mini Capsule Rechargeable Speaker for iPod/MP3 Players, PC, Tablets, etc. PMS2 PMS2R Plays all iPod/iPhone models and other audio devices with 3.5-mm audio jack Perfect replacement for laptop speakers Perfect replacement for laptop speakers Unique vacuum bass design for surprising volume and bass response Fits in your Hand / Pocket for ultimate portability Built in li-ion rechargeable batteries Frequency response 100HZ-20KHZ Battery Charge time:DC 5V 200MAH-300 MAH around 2.5 hours; USB 4 hours Plays On Fully Charged 8 hours Dimensions:2" D x 1.4" W x 2.2"H Red PMS2W

PMS5DB



Bass Expanding Rechargeable Mini Speakers Pair for iPod/MP3/Computers (Black)

- Plays all iPod/iPhone models and other audio devices Perfect replacement for laptop speakers Unique vacuum bass design for surprising volume
- and bass response
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries
- Frequency response 100HZ-20KHZ Battery Charge time:DC 5V 200MAH-300 MAH around 2.5 hours;USB 4 hours
- Plays On Fully Charged 8 hours Dimensions:2 D x 1.4 W x 2.2H
- Color: Black



White

P





Two Speed (33/45 RPM) Turntable 3" Built-In Speaker

Converts Vinyl, Direct to USB/SD Card X-Bass Control System

**Turntables** 

Plays CDs and MP3s from USB/SD AM/FM Radio (FM 88 - 108 Mhz, AM 540 - 1600 kHz) USB/SD Card Slots - Play MP3s or Encode Vinyl to .

MP3

- Radio Dial Scale With Amber Backlight Rotary Volume Control RCA Line Out 3.5mm Headphone Jack Wireless Remote Control LCD Display With Blue Backlight David Service: AC 110
- Power Source: AC 110
- Dimensions: 12.24 (W) x 12.36 (D) 6.61 (H)





#### Retro-Style Turntable - Plays Radio, MP3s via USB & SD Memory with Vinyl-to-MP3 Encoding (Red)

- .

- AM/FM Radio RCA Line Out 3" Built-in Speakers X-Bass Control System USB & SD Memory Slots 45 RPM Adaptor Included Power Source: AC 110/220V Illuminated Front Dial Display
- Illuminated Front Dial Display LCD Display with Blue Backlight

- Vinyl to MP3 Recording Function Radio Dial Scale with Amber Backlight Wireless Remote Control Playback Configuration
- .
- 3.5mm AUX Input Jack & 3.5mm Headphone Jack Three speeds (33-1/3, 45, and 78 RPM) to Ensure You Enjoy All Your Favorite Vinyl Records
- Dimensions: 15.98 (W) x 13.62 (D) x 8.66 (H)

### PTR8UB

#### Retro Turntable with AUX Input/Radio/USB/SD/ MP3 and Vinyl-to-MP3 Encoding (Black)

- •
- 3 Speed 33/45/78 RPM Selectable Turntable USB/SD For MP3 Playback USB/SD Card Slots Play MP3s or Encode Vinyl to MP3 .

- AM/FM Radio (FM 88 108 Mhz, AM 540 1600 kHz) X-Bass Control System

- Radio Dial Scale With Amber Backlight

- Rotary Volume Control RCA Line Out 3.5mm Headphone Jack LCD Display With Blue Backlight Runs On 110 V AC
- Color: Black





#### Vintage Styled Turntable - Plays AM/FM Radio, Cassettes, CDs, and MP3s - USB/SD Direct Record and Aux Input For iPod/MP3 Players (Mahogany)

- AM/FM Radio
- Built-in Speakers RCA Line Outputs

- Front-Loading CD Tray Read-Out Analog Radio 45 RPM Adaptor Included Power Source: AC 110/220V

- LCD Display with Blue Backlight Direct USB/SD Turntable Encoding Cassette Playback with Single Key Slot-in Design 3.5mm AUX Input Jack & 3.5mm Headphone Jack Three speeds (33-1/3, 45, and 78 RPM) to Ensure
- You Enjoy All Your Favorite Vinyl Records





Classic Retro Style Turntable - Plays AM/FM Radio, Cassettes & MP3s -USB/SD Direct Record Function & Aux Input For iPod/MP3 Players

- AM/FM Radio RCA Line Outputs
- Built-in Speakers 45 RPM Adaptor Included
- Power Source: AC 110/220V Digital Read-Out Analog Radio LCD Display with Blue Backlight

- .
- Direct USB/SD Turntable Encoding Cassette Playback with Single Key Slot-in Design 3.5mm AUX Input Jack & 3.5mm Headphone Jack Three speeds (33-1/3, 45, and 78 RPM) to Ensure
- You Enjoy All Your Favorite Vinyl Records





- CD Player Aux Input To Play All Mp3 Player And iPods,Phones Am Fm PLL Tuning Radio With 10 Station AM And 10 Stations Fm Memory
- Cabinet
  - Runs on 110 V AC

PTTC4U

#### Multifunction Turntable With MP3 Recording, USB-to-PC, Cassette Playback, Rechargeable Battery

- Three Speed Belt-Driven Turntable Fit For 33, 45, and 78 RPM Jewel Stylus with Ceramic Stereo Cartridge

- 45 RPM Adapter Automatic and Manual Stop Selection USB Port For Converting Vinyl and Cassette to MP3 via Your PC
- One Key Cassette Player Deck

- Two Built-In Stereo Speakers
- Stereo RCA Output Power On/Off With Rotary Volume Control
- 3.5mm Aux-In Jack Rechargeable Battery USB Cable and Free Audacity Software Included For Vinyl-to-MP3
- Dimensions: 12.72 x 11.97 x 6.30

### PTCDS1U

Classical Turntable with AM/FM Radio CD/Cassette & USB Recording

- Phono/Radio/CD player/USB record/Cassette
- AM/FM Radio Front loading,single CD, drawer type CD/MP3/CD-R/CD-RW discs compatible
- USB record USB record USB encoder that can easily record old vinyl or other Aux in audio onto Flash Drive Through USB Socket in
- MP3 Formats
- play Your Music (mp3 and wma )Pre-stored on ,USB Drive or MP3 Player Through USB Port

#### 3 speed turntable 33-1/3, 45, 78 RPM

- Ceramic stereo cartridge Auto return
- Audio output power: 2.5W(max) 3.5mm Aux in jack Remote control for CD/USB
- 2 speaker AC Power
- Dimensions: 20.08"X13.39"X8.86"



## PTCDS2UI

#### Classical Turntable with AM/FM Radio/ CD/ Cassette/ USB Recording & iPod Player

- Phono/Radio/CD player/USB record/Cassette
- AM/FM Radio Front loading,single CD, drawer type CD/MP3/CD-R/CD-RW discs compatible USB record
- USB record USB encoder that can easily record old vinyl or other Aux in audio onto Flash Drive Through USB Socket in MP3 Formats
- play Your Music (mp3 and wma )Pre-stored on ,USB Drive or MP3 Player Through USB Port

**Turntables** 

- 3 speed turntable 33-1/3, 45, 78 RPM Ceramic stereo cartridge
- Auto return
- Audio output power: 2.5W(max)
- Ipod player Remote control for CD/USB
- 2 speaker
- AC Power
- Dimensions: 20.08"X13.39"X8.86'







#### Classical Trumpet Horn Turntable/Phonograph with AM/FM Radio CD/Cassette/USB Players & Direct to USB Recording

- Belt Drive USB Record 110 Volt AC Power
- Acoustic Trumpet Horn Ceramic Stereo Cartridge
- AM/FM Radio with Stereo 45 RPM Adaptor Included
- Audio Output Power: 2 Speaker

- Front-Loading, Single CD Drawer Phono, Radio, CD & Cassette Players 3 Speed Turntable 33-1/3, 45, 78 RPM
- .
- CD, MP3, CD-R/CD-RW Disc Compatible Wireless Remote control Playback Configuration Play Your Favorite MP3 Song from USB Flash Drives
- Dimensions: 15.55 X 11.81 X 31.49



## PVNP4CD

#### Vintage Phonograph Horn Turntable With CD, Cassette, AM/FM, Aux-In, USB-to-PC Recording

- Handmade High Quality Wood Veneer Cabinet Speaker: Full Size Brass Horn 3 Speed Turntable: 33, 45, 78 RPM USB Jack For PC Connection Record Your Vinyl to
- MP3
- Drawer CD Player Analog AM/FM Tuner

- Slot-in Cassette Front Panel 3.5mm Aux-In Jack

- 3.5mm Headphone Jack Stereo RCA Output USB Cable and Free Audacity Software Included For Vinyl-to-MP3
- Dimensions: 31.49 x 21.65 x 19.69

## PTCDS7UIB

#### **Retro Vintage Turntable System with Built-in Speakers - Plays AM/FM** Radio, CD, Cassette & MP3s - USB Card & SD Memory Slots, Vinyl-to-MP3 Encoding & Built-in Slide-Out iPod/MP3 Player Compartment (Black)

- AM/FM Radio 45 RPM Adaptor Included
- Power Source: AC 110/220V Illuminated Front Dial Display

- CCD Display with Blue Backlight Front-Loading Single CD Drawer Compatible with CD-R/CD-RW Discs
- Wireless Remote Control Playback Configuration 3.5mm AUX Input Jack & 3.5mm Headphone Jack
- Cassette Playback with Single Key Slot-in Design Three speeds (33-1/3, 45, and 78 RPM) to Ensure You Enjoy All Your Favorite Vinyl Records
- Dimensions: 15.98 (W) x 13.62 (D) x 8.66 (H)



#### Classical Vinyl Turntable Record Player With PC Encoding/ iPod Player/AUX Input & Dual Fold-Out Speaker System

- Rugged suitcase with Dual fold-out speakerS USB connection to enable recording with PC Can be saved with MP3/WAV and OGG VORBIS in
- the computer Auto return .
- Auto Stop Phonograph

- Headphone output
  - 110 Volt AC power 45 rpm adaptor included Software, USB cable & Aux
  - in cable & AC adapter
- Dimensions: 20.62 x 13.14 x 7.24





Turntable Boombox Multimedia System - Plays AM/FM Radio, CDs, Cassettes, MP3s, - USB/SD Memory Ports & Vinyl-to-MP3 Encoding

- 150 Watt Output
- RCA Line Outputs 3.5mm AUX Input Jack
- 45 RPM Adaptor Included Analogue Tuning Radio (FM)
- Bookshelf Speakers Included Direct USB/SD Turntable Encoding Compatible with CD-R/CD-RW Discs
- Wireless Remote Control Playback Configuration 3.5mm AUX Input Jack & 3.5mm Headphone Jack Front-Loading, Single CD Drawer and Dual Cassette
- - Decks Three Speeds (33-1/3, 45, and 78 RPM) Record
- Playing Speeds Dimensions (Main Unit): 12.49 x 11.39 x 10.53
- Dimensions (Speaker): 5.73 x 6.28 x 8.84




## **Turntables**

### 211





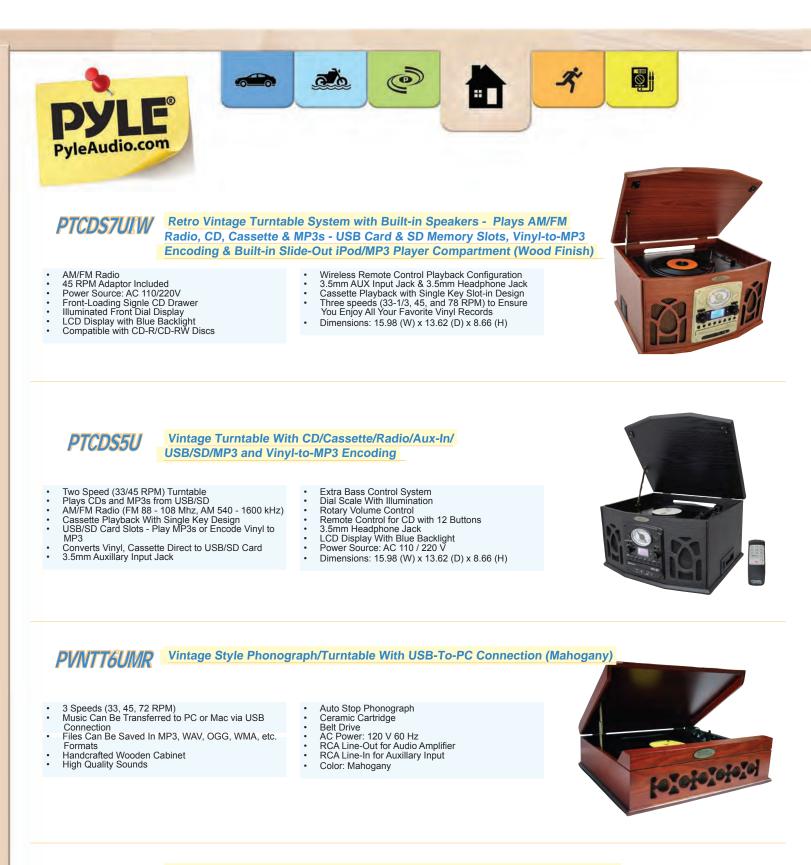

#### Vintage Style Phonograph/Turntable With USB-To-PC Connection (Dark Maple) PVNTT6UMT

- 3 Speeds (33, 45, 72 RPM) Music Can Be Transferred to PC or Mac via USB
- Connection Files Can Be Saved In MP3, WAV, OGG, WMA, etc.
- Formats Handcrafted Wooden Cabinet High Quality Sounds

**Turntables** 

- Auto Stop Phonograph Ceramic Cartridge

- AC Power: 120 V 60 Hz RCA Line-Out for Audio Amplifier RCA Line-In for Auxillary Input
- Color: Dark Maple





#### Retro Belt-Drive Turntable With Three Speeds and AM/FM Radio

- 3 Speed Turntable: 33, 45, 78 RPM Ceramic Stereo Cartridge 45 RPM Adapter •

- Two Built-in Stereo Speakers AM/FM Radio

- 3.5mm Aux-In Jack Stereo RCA Output AC Power Supply •
- •
- . Dimensions: 12.60 x 10.63 x 4.72



### PVTT2U

Retro Belt-Drive Turntable With USB-to-PC Connection, Rechargeable Battery

- 3 Speed Turntable: 33, 45, 78 RPM Ceramic Stereo Cartridge 45 RPM Adapter Two Built-in Stereo Anti-Magnetic
- :
- •
- Speakers USB Port For Connection to PC -Convert Vinyl to MP3 Stereo RCA Output Beobarcoable Battan •
- .
- .
- Rechargeable Battery Free Audacity Software Included For Vinyl-to-MP3 . Dimensions: 10.63 x 13.78 x 4.33





**PVTT2UGR** 







**PVTT2UOR** 





#### **Retro Style Turntable With USB-to-PC**

- Wooden Cabinet with Plastic Dust Cover Three Speeds: 33, 45, 78 RPM 45 RPM Adapter Automatic and Manual Stop Two Built-in Full Range Speakers . •
- .
- .
- Ceramic Stereo Cartridge Stereo RCA Output Free Audacity and USB Cable Included For Vinyl-to-MP3 Conversion .
- Dimensions: 12.60 x 11.02 x 3.54





#### Universal Tablet PC/Android/Kindle/iPad Floor Stand For Music, Reading, Bedside Use, Fitness Use

- Fits Any Tablet From 8.0 To 10.1 Inches In Size Use With Reading Apps, Music Apps, Internet Browsing, Watching Video Height Adjustability: 3.6 - 4.9 Feet 360° Rotatable Flexible Metal Hose 300° Rotatable Tablet Gripper .
- High Brightness LED Lamp With Dimmer
- - Charger
- Also Holds Your iPhone/Android Phone USB Port To Charge Your Phone with Your USB
- DC 5 Volt .



## Tablet PC / iPad Stands & Mounts



- Works with virtually any tablet Fits Tablets from 8.9" 10.4" Safely and Securely Position Your Device Where You Want
- Want (Compatible with iPad 2nd, 3rd, & 4th Generations, Galaxy, Kindle, etc.) Stable Locking Clamp Base Attaches to Tables, Nightstands, Countertops, etc.
- Flexible Swivel Gooseneck Arm
- Easily Mount and Un-Mount Your Device Quickly and Easily
- 360° Rotation Allows for Portrait and Landscape Viewing Rugged, Durable and Secure Construction

NEW

## Tablet PC / iPad Stands & Mounts

#### Tamper-Proof Anti-Theft iPad Kiosk Safe Security Desk Table Stand, Holder, Public Display Case with Cable Management for iPads 2/3/4

- Anti-Theft Countertop Kiosk For iPad 2nd, 3rd, & 4th Generations Secure Tamper-Proof iPad Security Home Button Accessible

- Home Button Accessible Tilt Adjustable Case Landscape or Portrait iPad Mounting Internal Cable Routing and Cable Management Foam Padding Inside to Prevent Damage and Scratches Includes Anchors & Screws to Properly Secure Base Rugged, Durable, Heavy-Duty Construction Perfect for Public or Office Installations

# PSPADLK45 NEW PSPADLK12



NEW

NEW



Quickly and Easily Mount and Un-Mount Your Device Safely and Securely Holds Your Device on Tables/ Desks Provides Safe, Sturdy, Stable, & Comfortable Use Angle Adjustable and Reclining for Viewing & Typing: 110° Recline

Use it for Reading, Books, Music, Instrument Apps, Note Taking, Presentations, etc.

- Ergonomically Designed, Rotatable Anti-Slip Handle Works For Both Landscape & Portrait Viewing
- Present Content Comfortably and On The Go Fits Any Tablet or Smartphone From 4.17 to 7.87 In
- Width
  - Fits iPhone, iPad, Galaxy, Nook, etc Perfect for the Home or Office

  - Dimensions: 4.72 x 6.3



#### Tempered Glass Base Rotating Anti-Theft Key Lock Tablet PMKSPAD6LK iPad, Kindle, Android, eReader, Samsung Galaxy Nexus Floor Stand Holder with Adjustable/Bendable Swivel Gooseneck

- Telescoping Floor Stand Holds Your Tablet and Your Mobile Phone or Mp3 Player Securely Handsfree Fits iPad, Kindle, Android, Nexus & Samsung Tablets, from 8.0 to 10.1 inches in size
- Also Holds Your Mobile Phone or Mp3 Player Directly Under Your Tablet to Easily Send Data Between the
- Unique Design Has Built in USB Charging and
- Easily Adjustable Viewing Angle with 360 Degree Rotatable Flexible Metal Hose
- 300 Degree Rotatable Tablet Holder Rotates Freely
- Between Portrait and Landscape Orientation Telescoping Column for Height Adjustment, from 43.5 to 58.5 inches
- Innovative Anti-Theft Lock Design with Key Tempered Glass Base for Stability and Durability Dimensions: 4.53 Feet Tall Base: 1.15" x 1.15" x 0.05"
- USB Input power: 5V / 600mA ~ 2000mA Weight: 7.5 lbs.
  - Color: Black

Universal Tri-pod 360 Degrees Bendable Swivel Gooseneck Anti-Theft Key Lock PMKSPAD4LK Telescoping Floor iPad, Kindle, Android, Nexus & Samsung Tablet Stand

- Telescoping Floor Stand Holds Your Computer Tablet and Your Cell Phone or Mp3 Player Securely Hands-free
- Fits iPad, Kindle, Android, Nexus & Samsung Tablets, from 8.0 to 10.1 inches in size Also Holds Your Mobile Phone or Mp3 Player Directly Under Your Tablet to Easily Send Data Between the Two
- Unique Design Has Built in USB Charging and Interface Cable for your Tablet
- Easily Adjustable Viewing Angle with 360 Degree Rotatable Flexible Metal Hose 300 Degree Rotatable Tablet Holder Rotates Freely
- Between Portrait and Landscape Orientation Telescoping Column for Height Adjustment, from 43.5
- to 58 5 inches Innovative Anti-Theft Lock Design with Key
- Tri-Pod Base for Stability USB Input power: 5V / 600mA ~ 2000mA
- Color: Black
- Tablet PC / iPad Stands & Mounts

#### **Classical Themed Home Phone PRT15** System with Audio Input Jack

- Tone/Pulse Switch
- Last Number Redial & Flash Function
   Classic Design with Modern Technology

PyleAudio.com

- Ringer High/Low Ringer Volume Selection
   Transfer Between Landline And Mobile Phones
- Eliminate up to 99% of Wireless Device Radiation
   Compatible with Mobile/Smartphones with 3.5mm Jacks
- Handcrafted Real Wood Base With Brushed Copper Accents
- One Button Pick-Up/Hang-Up Landline And Mobile Phone, Directly From Dial Pad

#### PRT251 System with Audio Input Jack **Classical Themed Home Phone**

- Tone/Pulse Switch
   Last Number Redial & Flash Function
- Classic Design with Modern Technology
   Ringer High/Low Ringer Volume Selection
   Transfer Between Landline And Mobile Phones
- Eliminate up to 99% of Wireless Device Radiation
- Compatible with Mobile/Smartphones with 3.5mm Jacks Handcrafted Real Wood Base With Brushed Copper Accents
- One Button Pick-Up/Hang-Up Landline And Mobile Phone, Directly From Dial Pad

#### **Classical Themed Home Phone System with** PRT35i Audio Input Jack and 30-Pin Apple Dock

- Tone/Pulse Switch
- Built-in iPhone Dock
- Last Number Redial & Flash Function
- Classic Design with Modern Technology
- Ringer High/Low Ringer Volume Selection
   Transfer Between Landline And Mobile Phones
- Eliminate up to 99% of Wireless Device Radiation
- Compatible with Mobile/Smartphones with 3.5mm Jacks
- Handcrafted Real Wood Base With Brushed Copper Accents
- One Button Pick-Up/Hang-Up Landline And Mobile Phone, Directly From Dial Pad



#### **Classical Themed Home Phone** PRT55i System with Audio Input Jack

- Tone/Pulse Switch
- Last Number Redial & Flash Function
- Classic Design with Modern Technology
   Ringer High/Low Ringer Volume Selection
- Transfer Between Landline And Mobile Phones Eliminate up to 99% of Wireless Device Radiation
- Compatible with Mobile/Smartphones with 3.5mm Jacks
- Handcrafted Real Wood Base With Brushed Copper Accents
- One Button Pick-Up/Hang-Up Landline And Mobile Phone, Directly From Dial Pad



### PRT45

- Tone/Pulse Switch
  Touch-Tone Buttons
- Last Number Redial Function
- Classic Design with Modern Technology
   Ringer High/Low Ringer Volume Selection
- Functional Crank Handle And Box. As Introduced In The 1920s.
- Handcrafted Wood and Veneer Construction With Brushed Bronze-Plated Hardware · Country Wall Phone with Classic Design: Authentic

 $\bigotimes$ 

**Retro Themed Country-Style** 

Wall Mount Telephone

Reproduction of Early American Heritage Telephones



## **Classical Themed Phone Systems**



0

20



- .


| For more detailed specifications, product-specific information and models visit www.PyleAudio.com |       |            |                  |                  |           |
|---|-------|------------|------------------|------------------|-----------|
| Model   | Size  | Processor  | Operating System | Storage Capacity | Bluetooth |
| PTBL72BC  | 7′′   | 1.2GHz A13 | Android 4.0      | 4 GB             | Yes       |
| <b>PTBL72BCEU</b> (European Model)  | 7′′   | 1.2GHz A13 | Android 4.0      | 4 GB             | Yes       |
| PTBL7C  | 7′′   | 1.2GHz A13 | Android 4.0      | 4 GB             |           |
| PTBL7CEU (European Model)   | 7′′   | 1.2GHz A13 | Android 4.0      | 4 GB             |           |
| PTBL92BC  | 9''   | 1.2GHz A13 | Android 4.0      | 8 GB             | Yes       |
| <b>PTBL92BCEU</b> (European Model)  | 9''   | 1.2GHz A13 | Android 4.0      | 8 GB             | Yes       |
| PTBL9C  | 9''   | 1.2GHz A8  | Android 4.0      | 8 GB             |           |
| <b>PTBL9CEU</b> (European Model)  | 9''   | 1.2GHz A8  | Android 4.0      | 8 GB             |           |
| PTBL9CUK (UK Model)   | 9''   | 1.2GHz A8  | Android 4.0      | 8 GB             |           |
| PTBL10C   | 10.1" | 1.2GHz A9  | Android 4.1      | 8 GB             |           |
| <b>PTBL10CEU</b> (European Model)   | 10.1″ | 1.2GHz A9  | Android 4.1      | 8 GB             |           |

For more detailed specifications, product-specific information and models visit www.PyleAudio.com

\*European (EU) and UK Astro models include compatible power adapters respectively.



**PBC Power Banks** 

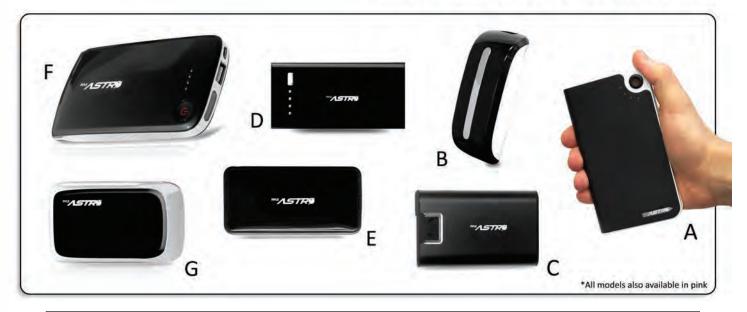

For more detailed specifications, product-specific information and models visit www.PyleAudio.com

|   | Model          | Battery Power<br>(mAh) | Universal Adapters<br>Included |
|---|----------------|------------------------|--------------------------------|
| А | PBC10000       | 10,000                 | Yes                            |
| В | PBC5200        | 5,200                  | Yes                            |
| С | PBC6600        | 6,600                  |                                |
| D | PBC5300        | 5,200                  |                                |
| E | PBC5100        | 5,200                  |                                |
| F | <i>PBC5000</i> | 5,000                  | Yes                            |
| G | <i>PBC3000</i> | 3,000                  | Yes                            |



Includes Universal Adapters to Charge all of Your Favorite Devices

# **Astro Power Banks**



### 3.5mm / 1/8 150 Watt Mono Audio Amplifier

- 3.5mm / 1/8" Male Audio Input
- 1 Channel Speaker Audio Output 15W x 1 RMS Audio Output 150W x 1 Peak Audio Output
- 4 Ohm Stable
- Designed for use with all audio players with 3.5mm /1/8 audio outputs mp3, Ipod, etc.

*PHA25* 

### 3.5mm / 1/8 2 Channel 300 Watt Stereo Audio Amplifier

- 3.5mm / 1/8" Male Audio Input 2 Channel Speaker Audio Output
- 15w x 2 RMS Audio Output /150w x 2 Peak Audio Output
- 4 Ohm Stable Designed for use with all audio players with 3.5mm /1/8 audio outputs mp3, Ipod, etc.

PHE1AB

- Designed for iPod/iPhone, Improves the sound quality with the line out from the . dock
- dock Build in high quality Texas Instruments headphone amplifier Intergrated Circuit High power output to drive high impedance or low sensitivity headphones or earphones Easy control of the playback of the iPod/iPhone while the player stays securely in your pocket Compatible with iPod Nano, iPod Video, iPod Touch, iPhone, all generations & all versions Easy & simple to use plura and play .

- Powered by the iPod/iPhone (no charging or battery
- needed)
- (300 ohms Loaded) Signal to Noise Ratio: =98dB (A weight) Distortion:<0.009% (10mW) Frequency Response: 10Hz ~ 80KHz Suitable Headphone Impedance: 16 ohms ~ 300
  - ohms

With a built-in clip, you can clip it onto anything Output Power: 100mW (16 ohms Loaded), 12mW

- Power Supply: Use iPod/iPhone power 3.3V Line control dimesions: 48mmx14mmx10.7mm AMP dock: 33.8mmx30.8mmx7.8mm
- Length: 800mm(Line Exposed)
- Weight: 20g

#### iPod/iPhone Headphone Amplifier (White Color) PHE1AW

iPod/iPhone Headphone Amplifier

- Designed for iPod/iPhone, Improves the sound quality with the line out from the dock .

- dock Build in high quality Texas Instruments headphone amplifier Intergrated Circuit High power output to drive high impedance or low sensitivity headphones or earphones Easy control of the playback of the iPod/iPhone while the player stays securely in your pocket Compatible with iPod Nano, iPod Video, iPod Touch, iPhone, all generations & all versions Easy & simple to use, plug and play Powered by the iPod/iPhone (no charging or battery needed)
- needed)



With a built-in clip, you can clip it onto anything Output Power: 100mW (16 ohms Loaded), 12mW (300 ohms Loaded)

- Signal to Noise Ratio: =98dB (A weight) Distortion:<0.009% (10mW) Frequency Response: 10Hz ~ 80KHz Suitable Headphone Impedance: 16 ohms ~ 300 ohms
- onms Power Supply: Use iPod/iPhone power 3.3V Line control dimesions: 48mmx14mmx10.7mm AMP dock: 33.8mmx30.8mmx7.8mm Length: 800mm(Line Exposed)

- Weight: 20g



- Designed for High Impedance and Low Sensitivity Headphones
- Leasy to Carry and Use In The Outdoors Increases Your Headphones Bass & Sound New Amplifier IC with Higher S/N and Lower
- Distortion



- Laptop or Mobile Phone Boost Volume and Reduce Battery Drain of Portable
- Players Built-In Rechargeable Battery (Charged Via USB) Robust Metal Casing For Everyday Use
- Ultra Low Signal to Noise and Distortion Specification



**Headphone** Amplifiers









PHE5AS

### **Bass Boosting Portable Headphone Amplifier (Silver Color)**

- Designed for High Impedance and Low Sensitivity Headphones
- Easy to Carry and Use In The Outdoors
- Increases Your Headphones Bass & Sound New Amplifier IC with Higher S/N and Lower
- Distortion
- Portable Headphone Amp for iPod, MP3 Player,
- Laptop or Mobile Phone Boost Volume and Reduce Battery Drain of Portable Plavers
- Built-In Rechargeable Battery (Charged Via USB)
- Robust Metal Casing For Everyday Use Ultra Low Signal to Noise and Distortion Specification

small and compact, ideal to be wrapped together with digital audio player User selectable USB charging function to help prolong battery lifespan and lower distortion from power supply circuit User definable startup volume memory and maximum volume limiter to protect user from bogging damage

volume limiter to protect user from hearing damage due to loud volume Automatic keylock feature User definable sleep timer function and total runtime

Output Power: 150mW (16O)16mW (300O) Headphone Impedance Range:16 O ~ 300 O SNR: =95dB (A weight)on line-in, =100dB (A weight)

Distortion:<0.009% (10mW)on line-in,<0.008% (10mW) on USB-in

Impedance Microphone: 1.5k Ohms, Sensitivity

(10mW) of USB-in Frequency Range: 10Hz ~ 1000KHz Power Supply: Rechargeable Li-ion battery Recharging: USB 5V DC 400mA Size: 96mmx55mmx15.5mm



## USB DAC and Portable Headphone Amplifier Black

display

on USB-in

Weight: 100g

- USB audio decoding and output for PC, functioning as a high quality external USB soundcard
- Texas Instruments PCM2706 serves as USB receiver. For better sound quality, a Wolfson WM8740 serves as digital-to-analog convertor (DAC), pairing with a high performance operational amplifier from ADI for
- high performance operational angulation of the DAC circuit Built-in headphone amplifier utilizing AD8692 and Texas Instruments TPA6130A as pre- and power-amp for high performance, good resolution, low distortion, and pervective output
- and powerful output Standard 3.5mm stereo line-in jack for portable
- amplification with conventional audio source Dual 3.5mm headphone output jack. Convenient
- design makes it easy to share music between two listeners Easy to use digital volume control function with great
- precision and channel balance Built-in EQ for 3 levels of Bass Boost
- Built-in rechargeable 1050 mAH Li-ion battery for 80 hours of continuous operation
- Quality anodized aluminum satin finish case design

### Stereo PC Multimedia Headset/Microphone

- Speech Recognition Headset And Boom Microphone Direct Noise Canceling Microphone Technology Adjustable Headband; Adjustable Boom Arm Full-Range Stereo Sound Convenient In-Line Volume Control Frequency Response: 20-22,000Hz / Impedance

PHPMC2

- Microphone: -58db±2db 3.5mm Plug
  - Cable Length: 6ft

Headset: 32ohms



#### PHPMCU10 Multimedia/Gaming USB Headset With Noise-Canceling Microphone

- Gives Unique 3-D,360 Sound Experience

- Eliminates the Need for A Sound Card Windows/Mac Compatible With In-Line Mute/Volume Control Adjustable Headband for Perfect Fit
- Adjustable, Bendable and Pivotable Microphone In-Line Volume Control

- Plug Type: USB 2.0 Cable Length: 6Ft Speaker Driver Diameter: ~40mm
- Sensitivity (S.P.L): 105db±3db/Mw / Impedance: 32 Ohms ± 15%/
- Frequency Response: 20Hz~20,000Hz



# **Headphones / Headsets**

PYLE P



### Folding Noise-Canceling Headphones

- Noise Canceling Feature Reduces Background Noise In Any Environment Ideal for Airplane, Train And Bus Use Closed-Style, Dynamic Headphone with 40mm Driver Foldable Headband Allows Phones to Fold Down To A Small Size For Convenient Storage

- Active Noise Canceling Headphones Reduce Outside

Power Source: 2 X AAA Batteries

- Ambient Noise By 83.4% Noise Cancellation Can Be Switched On/Of Frequency Response: 20~20K Hz, Impedance: 32 Ohms, Sensitivity: 110db ± 2db/Mw Cable Length: 1.5m Plug: 3.5mm Stereo + Dual Mono Adaptor




#### High-Fidelity Noise-Canceling Headphones With Carrying Case PHPNC45

- Reduces Ambient Noise By 95% Ergonomically Designed For Maximum Comfortable Listening Experience Up To 20dB Of Noise Cancellation; Effectively
- Reduces Aircraft Or Subway Engine Noise Larger 40mm Driver With Clear Sound And Well
- Defined Bass
- Frequency Response: 30 20000 Hz Speaker Type: 40mm Mylar

- Cone Impedance: 320hm Noise Reduced Over Frequencies 70 1200 Hz

- 2 X AAA Batteries Required Cable Length: Detachable 1.0m Connects With 3.5mm Stereo Jack Included Accessories: Detachable Audio Cable, 1/4-Inch Stereo-Plug Adapter, Dual-Plug Adapter (For Airplane), Hard Carry Case





### **Comfort Zone Sound High-Fidelity Noise-**Canceling Headphones with Carrying Case

- Reduces Ambient Noise By 97%

- Up to 20dB of Noise Cancellation Convenient Foldable Swivel Design Ergonomic Design for Maximum Comfort Effectively Reduces Aircraft Or Subway Engine Noise Larger 40mm Driver With Clear Sound and Well Defined Bass Noise Reduced Over Erequencies 70 1200 Hz
- Defined Bass Noise Reduced Over Frequencies 70 1200 Hz Headphone Driver Unit: Open Air Frequency Response: 30 20000 Hz Speaker Type: 40mm Mylar Cone Impedance: 320hm

- 2 X AAA Batteries Required
- Cable Length: Detachable 1.0m 1/8 Stereo Mini Plug Compatibility Connects With 3.5mm Stereo Jack Sensitivity: (db): 102/mw 30mm Dynamic Closed Type

- 30HZ-20,000HZ 33 Ohms@1K Accessories Included:Detachable Audio Cable, 1/4-Inch Stereo-Plug Adapter, Dual-Plug Adapter (for airplane use)and Hard Carry Case





## **Comfort Zone Sound High-Fidelity Noise-Canceling Headphones with Carrying Case**

- Reduces Ambient Noise By 97% Up to 20dB of Noise Cancellation Convenient Foldable Swivel Design Ergonomic Design for Maximum Comfort Effectively Reduces Aircraft Or Subway Engine Noise Larger 40mm Driver With Clear Sound and Well Defined Base
- Defined Bass Noise Reduced Over Frequencies 70 1200 Hz Headphone Driver Unit: Open Air Frequency Response: 30 20000 Hz Speaker Type: 40mm Mylar Cone Impedance: 320hm

- 2 X AAA Batteries Required Cable Length: Detachable 1.0m 1/8 Stereo Mini Plug Compatibility Connects With 3.5mm Stereo Jack
- Sensitivity: (db): 102/mw 30mm Dynamic Closed Type
- 30HZ-20,000HZ
- 33 Ohms@1KAccessories Included:Detachable Audio Cable, 1/4-Inch Stereo-Plug Adapter, Dual-Plug
- Adapter (for airplane use)and Hard Carry Case





*PPCM20* 

Microphone Function Via USB

USB Port

## Wireless Headset/Headphones With Base Station and USB Transmitter for PC/Mac For Video/Voice Chat

ā.a

Advanced Wireless And Digital Technologies Provides Stereo Hi-Fidelity Without Wires PC With USB Audio Streaming Capability Through

Microphone Function Via OSB Devices With Audio Out Connectors Like TV, iPod, MP3, MP4, CD Player, Etc. Can Also Be Connected When Fully Charged, The Built-In Rechargeable Battery Can Support About 8 Hours Operation Time Mini USB Transmitter Active Noise Reduction Function Rechargeable Batteries Built-In To Headset

Rechargeable Batteries Built-In To Headset

USB To MINI-USB 5PIN Charging Cable Frequency Carrier: 2.4ghz Reception Range: 10m 360° Transmit Power: 4dbm Frequency Range: 2.4G ~ 2.48ghz

 $\bigcirc$ 

#

- - Frequency Range: 2.46 ~ 2.48gnz Frequency Response: 20- 20000Hz S/N Ratio: >80db Distortion:<0.1% Working Power: 3.5-4.2V Speaker Size: 30mm Headset Size: 2.16 x 5.12 x 5.71 Hoodest Wicht: & Or
- Headset Weight: 8 Oz.

PHBT35

## Stereo Bluetooth Streaming Wireless Headphones with Built-in **Microphone - Works with All Bluetooth-Enabled Phones & Devices**

- Built-in Bluetooth technology you can stream audio directly from your Bluetooth enabled device with
- Crystal clear wireless performance Works with iPhone, Blackberry, Droid, iPads, Tablets and more Take Calls with Built-in Microphone

- Talk Calls with Built-In Microphone Talk Time: Up to 7 hours Standby time: Up to 180 hours Frequency: 2400.0 2483.5MHZ Music Playing Time: Up to 6 hours Noise-Canceling Stereo Sound Drivers Built-in Version 3.0 Bluetooth technology

- Listen to your favorite music from Bluetooth-enabled
- devices
- Unlock more possibilities Can be paired with 2 mobile phones Bluetooth Profiles Supported: Headset, Hands-Free, A2DP & AVRCP Average Charging Time: Up to 6 hours Dimensions (unfolded): 7.6" (L) - 6.5" (W) - 2.7" (H)
- Dimensions (folded): 7.6" (L) 6.5" (W) 1.5" (H)

 $\bigcirc$ 

x

PHPW2

FM Hi-fi Wireless Headphones with Extreme Bass

- Wireless Reception from TV
- Wired Reception to Mp3 Player FM Radio and Wired Reception from PC, CD, DVD
- Players
- Reception Frequency Range: 85MHz~108MHz
- Driver Size: 40mm Sensitivity (S.P.L): 105dB±3dB/MW (at 1 KHz)
- Impedance: 32 Ohms ± 15%
- Frequency Response: 20~20,000Hz Signal/Noise Ratio: >50dB Headphone: DC 3V (2x1.5V AAA batteries) Transmitter: DC 3V (2x1.5V AAA batteries)
- Maximum operation distance: 100FT, 360°



### Professional 5 in 1 Wireless Headphone System

Wireless Headphone Suitable for Listening to Any Device with an Audio Output Wireless Monitor for Monitoring Sound from Any Room (e.g., Monitoring Baby) High Powered Signal with Effective Long Range

Headphones

- Built in Microphone for Web Chat Hi-Fi & Bass Effect for Superior Sound Performance
- Built in FM Radio Product Dimensions:6.8 x 3.3 x 8.4
- Weight .63Lbs





### Infrared Wireless Listening Hearing Assistance System with **Rechargeable Battery & Power Charging Dock Station**

- Noise Reduction Circuitry To Reduce Background Noise Low Pass Filter To Reduce High Frequencies Limiter Circuitry To Eliminate Peaks In The Signal Powerful IR Transmitter .

- Lithium-Ion Charge & Auto Switch-Off FunctionReceiverHigh S/N, Noise Reduction Function (=70dB)
- Balance Adjustment & Tone Adjustment Normal Hearing Aid Function
- Wired Headphone With Hearing Aid
- Built-In Lithium-Ion Battery
- Docking Station Recharges Transmitters



UHF Wireless Headphones with iPhone/iPod Dock Transmitter and Aux Input

- Universal iPod Dock Plays And Charges All Docking iPod Models
- Auxiliary Connection Lets You Listen To Non-Docking iPod Models, TV/CD/DVD/MP3 Or Any Audio
- Systems Several Headphones Can Be Used Simultaneously With One iPod Transmitter Working Distance Up To 150 Feet With Our Latest RF
- Wireless Technology Auto Mute And Auto Running Function Available For
- Headphones
- Double PLL System For Ultimate Frequency Stability Active Noise Reduction System For Crystal Clear
  - Sound System: UHF/RF
- Carrier Frequency: 915mhz S/N Ratio: 75db(Minimum)

- Channel Separation: 35db (Minimum) Distortion: 1% (Maximum) Frequency Response: 30 20,000Hz Power Supply Of Transmitter: DC12V 150mA
- Power Supply Of Headphone: 2 AAA Batteries

# PIH30R

UHF Wireless Stereo Headphone with Wireless iPhone/ iPod Dock Transmitter and RF Remote Control

- UHF Wireless Stereo Headphone With Wireless iPod Dock Transmitter And RF Remote Control
- Universal iPod Dock Plays And Charges All Docking iPod Models
- Auxiliary Connection Lets You Listen To Non-Docking Auxiliary Comfection Letter for Listen to Non-Dockin iPod Models, TV/CD/DVD/MP3 Or Any Audio System Remote Offers Many Buttons For Easy Control And More From Across The Room. Remote Can Be Used Threw Walls

- Several Headphones Can Be Used Simultaneously With One Ipod Transmitter
- Working Distance Up To 150 Feet With Our Latest RF Wireless Technology
- Auto Mute And Auto Running Function Available For Headphones
- Double PLL System For Ultimate Frequency Stability Active Noise Reduction System For Crystal Clear
- Sound System: UHF Carrier Frequency: 915mhz

- System: UHE Carrier Frequency: 915mhz S/N Ratio: 75db(Minimum) Channel Separation: 35db(Minimum) Distortion: 1%(Maximum) Frequency Response: 30 20,000Hz Power Supply Of Transmitter: DC12V 150ma Power Supply Of Headphone: 2 AAA Batteries
- Power Supply Of Remote Control: Button Batter

#### Digital Voice Recorder with 4GB Built-in Memory, Headphone Jack, L er

4GB Built-in Flash Memory Up to 272 hours recording time

Storage up to 99 Files Easy to Search / Scroll File folders & Hold Feature

Display Multi-functional Full Function LCD

Recording Mode Selectable (SP/LP) Records files in (.wav) format

*PVR200* 

- Voice-Activated-System Recording stops when
- Built-in Speaker, & Built-in Microphone Low battery indicator, & Batteries level indicator Headphone Jack (3.5mm / 1/8) Includes USB Data Transfer Cable
  - Powered by 2 x AAA Batteries (not included) Battery Life: Record 13.5 Hours / Playback Headphone 9 Hours / Playback Speaker 3.5 Hours
  - Unit size: 4.25H x 1.18W x 0.59D

# *PVR300*

sound stops

- Micro SD card Slot (Supports up to 8Gb) 4GB Built-in Flash Memory Up to 580 hours
- recording time (LP) Recording Mode Selectable (SHQ/HG/SP/LP) USB Interface\_USB Connector Slides Out for Data
- Transfer and Charging Wave Encoding/Playback Records files in Wave
- format. Voice-Activated-System - Recording stops when
- sound stops. 3 File folder Storage (A/B/C) Each folder can store up
- To 999 Files (2,997 Total)

Rechargeable Digital Voice Recorder with USB & PC Interface, Built-in

- Easy to Search / Scroll File folders & Hold Feature
- Display Multi-functional Full Function LCD Built-in speaker, & Built-in microphone Low battery indicator, & Batteries level indicator Headphone Jack (3.5mm / 1/8) Mini USB 5 Pin PC Interface

Rechargeable Battery, Micro SD Slot, 4GB Built-in Memory & Headphone Jack

- Built-in Rechargeable Battery (Polymer 3.7V 320mAh) Battery Life: Record 12 Hours / Playback Headphone
- 11 Hours / Playback Speaker 4 Hours
- Unit size: 3.62H x 1.18W x 0.51D



PHPHA66

NEW







NEW

# Voice Recorders / Hearing Assistance





PT260A

### 200 Watts Digital AM/FM Stereo Receiver

- Stereo Amplifier Power Main: 50W x 2 @ 8 Ohm, 100W x 2 @ 4 Ohm Audio Inputs with A/B Speaker Outputs AM/FM Radio with Digital Display Screen Auto Scan,Memory, Radio Station PREVIOUS/NEXT
- 50 Radio Station Pre-Set Memory Main Channel Volume, Balance, Treble, Bass & Gain
- Microphone Volume, Bass, Treble & Echo Controls

- Two Microphone Input JackS Three RCA Input Source 110/220V Power Switch AM/FM Antenna and Remote Control Included Dimension:17 x 11.5 x 4.7
- Weight:14.3 LBS

Controls



3

3

8902

....

8605

....

- 200 Watt Digital Home Stereo Receiver System with USB Flash Reader PT380AU
- Powers 4 loudspeakers USB reader function
- AM/FM radio with digital display screen Auto scan, radio station PRE/NEXT control

Volume/balance/treble/bass gain control for main

Remote control included 50 radio station pre-set memory

- Two microphone input jacks Two RCA input source

  - 110V/220V power switch
    - AM/FM antenna included

Volume/bass/treble/echo control for microphone

channel Volume/bass/treble/echo control for microphone



## 300 Watt Digital Home Stereo Receiver System with USB/SD Memory Readers

Two microphone input jacks

- Powers 4 loudspeakers
- USB flash reader
- AM/FM radio with digital display screen Auto scan, radio station PRE/NEXT control

  - Remote control included 50 radio station pre-set memory
- Volume/balance/treble/bass gain control for main
- 110V/220V power switch

channel

Two RCA input source AM/FM antenna included

#### 300 Watts Digital AM/FM/USB Stereo Receiver PT560AU

- Power main: 150W x 2 @ 8 ohm; 300W x 2 @ 4 ohm AM/FM Tuner W/Digital Display Screen AUTO SCAN,MEMORY, Radio Stations Pre/Next .

- Control Play/Pause/PRE/Next/Stop Control for USB Function Volume/Bass/Treble/Ealance control for Microphone

- (A/B) binding post terminals Stereo Amplifier With A/B Speaker Output AM/FM Radio With Digital Display Screen

# PT570AU

- VFD Display
- 2 Microphone Inputs Built-In AM/FM Radio
- 5.1 Channel Amplifier 12 Preset Radio Station
- Wireless Remote Control
- Built-In USB and SD Audio

- 50 Radio Station Pre-Set Memory 50 Radio Station Pre-Set Memor USB flash drive Reader function Control For Main Channel TWO RCA Input Source Three RCA Input Source Control For Microphone Two Microphone input Jack

- Remote Control Included 110V/220V Power Switch
- Dimension:19 x 11.4 x 4.7
- Weight:11.5 LBS

## 5.1 Channel 350 Watt Amplifier Receiver with Built-In AM/ FM Radio, USB Flash & SD Card Readers

- Total Power Output: 350 Watt

- Treble/Bass & Independent MIC Volume Controls Over Current, Short Circuit, & Over Voltage Protection Input Selectors: 3 Stereo RCA Selector, 1 AM/FM Radio, 1 USB port & 1 SD Memory Card Slot Output: 5 Channel Speaker Output Terminals for L, R,
- Center, SL, SR, And 1 Line Out for Subwoofer



38.6 0-

- PT530A
- Two Channel 350 Watts Built-In AM/FM Radio Amplifier Receiver

Full Remote Control

- 2 Channel Amplifier .
- VFD Display
- Built-In AM/FM Radio 2 MIC Input, Treble and Bass of MIC Adjustable, Independent MIC Volume Control

Receivers

- Over Current Protection, Short Circuit Protection And
- Over Voltage Protection 12 Preset Radio Station

- Power Output: 350W for L, R Channel (4 Ohms)
- Input Selector: 3 Stereo RCA Selector, 1AM/FM Radio, 2 Microphone Input Output: 2 Channel Speaker Output Terminal for L, R .
- Dimensions: 19.7 x 15.7 x 7.7





#### 500 Watt Stereo Receiver AM-FM Tuner/USB/SD/ PT4601AIU **Ipod Docking Station & Subwoofer Control**

- Ipod docking station, suitable for all iPod & iPhone (Ipod not included) USB/SD Card MP3 Player

- A/B Speaker Output Separate gain control for subwoofer 50 Radio Station Memory Microphone Volume/Tone/Echo Control
- 500 watt peak power 200 watts x 2 @ 8 ohms RMS

- 100 watts x 2 @ 4 ohms RMS
- Inputs: RCA (2 audio sources) Outputs: Banana binding post (to speakers) 2 mono RCA dedicated for subwoofer output Digital fluorescent output display meter iPcd / MP3 input with cable 110-220V Switchable

- AM/FM Quartz Synthesized Tuner
- Auto Station Seek



**Receivers** 



- Power On/Off Switch & LED Indicator Speaker A/B Channel Selectors & LED Indicators
- Balance Control Volume Control
- Auto On Switch

- Auto Input Switching 2 Stereo Line Inputs 1 Stereo Line Output
- Bridgeable Output Replaceable Fuse Unswitched 200W Max AC Outlet

Amplifiers

- 110/220 Voltage Selector Detachable Power AC Input
- Dimensions: 16.5W x 2.36H x 8.2D





•

## Professional PA Amplifier w/Bulit In DVD/CD/MP3/USB/70v Output

- With USB Port, DVD Player (Anti-Shock) Compatibility with DVD/CD/CD-R/CD-RW/MP3
- •
- Output Regulation: Less than 2dB no Load to Full Load
- Speaker Output: 4 Ohm(20V) 8 Ohm(28.3V) 16 Ohm(40V) 70V Line Out: 1V±0.3V Frequency Response: 20Hz a 20Khz Harmonic Distortion: 1%

- S/N Rotie:< 75dB 2 Mic Input with Volume Control 1 AUX Input with Volume Control DVD/AUX Volume Control

- 400 Watts Indicator: LED Output Level Master AC Power Supply: 110-127/220-240 AC 50/60 Hz DC Power Supply: 12V or 24V Battery



### Professional PA Amplifier w/Bulit In DVD/CD/MP3/USB/70v output

- With USB Port, DVD Player (Anti-Shock) Compatibility with DVD/CD/CD-R/CD-RW/MP3 Output Regulation: Less than 2dB no Load to Full
- Load
- Speaker Output: 4 Ohm(20V) 8 Ohm(28.3V) 16 Ohm(40V) 70V Line Out: 1V±0.3V Frequency Response: 20Hz a 20Khz Harmonic Distortion: 1%
- S/N Rotie 75dB

- 2 Mic Input with Volume Control 1 AUX Input with Volume Control DVD/AUX Volume Control
- 700 Watts
- Tone Controls: ± 10dB at 100Hz Treble ±10dB at 10KHz

- AC Power Supply: 110-127/220-240 AC 50/60 Hz DC Power Supply: 12V or 24V Battery



## 1000 Watts AM/FM/ Tuner Hybrid Amplifier W/ 70V Output

- 1000 Watts Peak Power

- 450 watts @ 2 ohms 360 watts @ 4 ohms 200 watts @ 8 ohms IPOD/MP3 Input With 3.5MM Cable
- 110-220V Switchable Digital Fluorescent Output Display Meter AM/FM Quartz Synthesized Tuner
- Auto Scan, PRE/NEXT/MEMORY/STORE For Radio

AUX Front Located 1/4" Input Jack

MIC 1 Auto Talkover Speaker Terminals (COM/8-Ohm/25V/70V)

MIC/TEL VOX Level Control (Internal) MIC 1 XLR Connector MIC 1 VOX (Auto-Talkover) Switch Monitor 600-0hm 1V Terminals (Music On Hold) Monitor 1W 8-Ohm Terminals (Music On Hold) Monitor Output Level Control (Music On Hold) Speaker Terminals (COM/4-ohm/8-Ohm/16-Ohm/25//701/

- Stations, 50 Stations Storage Removable Rack-Mount Brackets Separate Level Control All Blue LED /Lights Gain Control Through LED
- DIMMER Remote Control Included

# *PCM20A*

## 40 Watt Power Amplifier w/ 25 & 70 Volt Output

- Power On/Off Switch & LED Indicator
- MIC 1 Output Level Control MIC 2 Output Level Control
- AUX Output Level Control
- Bass and Treble Tone Controls MIC 1 Front Located 1/4" Input Jack MIC 2 Front Located 1/4" Input Jack
- 110/220 Voltage Selector Detachable AC Power Input Dimensions: 7.87W x 3.15H x 5.9D

Replaceable Fuse



## 100 Watt Power Amplifier w/ 25 & 70 Volt Output

- Power On/Off Switch & LED Indicator AUX 1/MIC 1 Output Level Control AUX 2/MIC 2 Output Level Control AUX 3/MIC 3 Output Level Control Bass and Treble Tone Controls Contour Control on/off Loudness Switch AUX RCA Output

- AUX 1/AUX2/AUX 3 RCA Input

- AUX/MIC Input Selector Switch Mute Terminals MIC 1/MIC 2/MIC 3 Terminals (MIC 1 Auto Talkover)

Impedance 4/8 ohms Power On/Off Switch with LED indicator MIC 1 / MIC 2/ AUX 1/4 Inputs

- TEL/PAGING Terminals Paging Output Level Control

Individual Volume Controls

PMSA20

50 Watts RMS

.

50 Watt PA Mini Amplifier

Removable AC Cord

Ohm/25V/70V)

Replaceable Fuse

Unswitched 500W Max AC Outlet 110/220 Voltage Selector Detachable AC Power Input

Dimensions: 16.93W x 3.46H x 10.51D

- .
- Power Input: AC 110V 60HZ Power Input: DC 12V Inlet Dimensions: 2.5H x 8W x 7.9D
- **Amplifiers**



- 1 888.88 00 Õ
  - 0  $\mathcal{K}_{\mathcal{X}}$ 0 ö



- (200, 300, 400) Three Line Input (RCA / ¼ TPS Balanced Jack
- 3.5mm Input Jack ) with Frequency Selector (50Hz, 100Hz, 200Hz)
- Three Output (one RCA, two ¼ TPS Balanced Jack) 80 Watts RMS @ 8 Ohms 120 Watts RMS @ 4 Ohms 2000 Watts Peak @ 4 Ohms 2000 Watts Peak @ 4 Ohms

- S/N: 102dB

228

Master Volume/Low/High Control for main Channel MIC Volume Control with Frequency Selector (500, 1K, 3K, 7K, 10K) +-15dB Special Frequency Volume Provider Selector

**Mini Amplifiers** 

- Repeat/Echo/Delay Control for Microphone Echo 3 Combo Microphone Inputs XLR / 1/4 Jacks +18 Volts Phantom Power Switch 3 Gain/Sensitivity Microphone Input Selector

- 3 x Microphone Inputs With Frequency And Sensitivity Controls

- 3.5 mm Aux Audio Input L.E.D. Level Meter Output Send And Return Jacks 1/4
- 2 RCA Audio Record Line Output

- Line Bass And Treble Controls Master Volume Control 2 Channels Or Bridged Speaker Output Cooling Fan Rack Mount Brackets
- 110V/220V Switch-able Power Source Dimensions: 19w X 3.1h X 12d
- Weight: 14.3 Lbs





## 60 Watts Hi-Fi Mini Stereo Amplifier

- Power Output: 2 x 12w (8 Ohm, RMS) Power Output: 2 x 24w (4 Ohms RMS) Power Output: 60w Max Peak
- 2 Microphone Inputs 2 Mic Volume Controls Echo Control
- DVD VCD-CD Tape Karaoke Input Selector Treble/Bass Controls

PVA3U

Master Volume Control

# 60 Watts/ Hi-Fi Mini Amplifier USB/SD Card Player

- USB-SD-/MMC-Card Slot Player Compatible With MP3/WMA Files With Shuffle Function .

- USB/Card, CD, Tuner, AUX Audio Input Selector Separate Bass And Treble Controls

- Surround Sound Sound Switch Output Power: 2 X 15w (Rms) At 80hm Power Output: 2 X 30w (Rms) At 4 Ohms
  - PCA1

Signal-To-Noise Ratio: 76dB Thd: 0.2% Sensitivity: 340mv Frequency Response: 100-10kHz +/-2 (Size 4 X 2cm) With Remote Control With Shuffle Function Power Supply: 110v

Dimensions: (H)2.5x(W)7.8x (D)5.9

Power Voltage: 110v Frequency Range: 20-20khz Input Sensitivity/Impedance: 265mv/1khz S/N Ratio: 77db Input Sensitivity Of Microphone: 8mv Thd: 0.3 %( 1khz/1w) Power Supply: 110v

Power Output: 60watts Max Peak And 1% Distortion

Power Supply: 110v Dimensions:3.3 X 9.8 X 9.1

- 2X15W Peak At 4-Ohm Power On Led Indicator
- . Master Volume Control
- RCA Cable L/R Input Four Push Type Speaker L/R Terminals



## Stereo Power Amplifier - 2 x 40 Watt Power with RCA Inputs and Push Type Speaker Outputs

Stereo Power Amplifier - 2 x 75 Watt Power with RCA

- Harmonic Distortion: 0.3% 2 x 40 Watt Peak at 4-Ohm

- Blue LED Output Level Display Frequency Respone: 20Hz-40kHz Power Fuse: 1.5 A, 250V Fast-Acting (5 x 20mm)
- Power Requirement: 120V AC 50Hz/230V AC 50Hz Tone Controls: Bass & Treble: +/-10dB (100Hz/10kHz) Dimensions: 6.3"; W x 2.72"; D x 4.7"; H (190 x 70 x
- 137mm)

PCA3

Treble, Bass and Master Volume Controls

.

- RCA Jack Input 2 x 75 Watt MAX Power Push Type Speaker Outputs Blue LED Output Level Display Power On/Off Switch and LED Indicator
- Compatible With Audio/Computerize Devices (MP3 Players) Via 3.5mm To RCA Converter
- - Dimensions: 7.48W x 2.87H x 5.39D





## Mini 2x120 Watt Stereo Power Amplifier

.

**Inputs and Push Type Speaker Terminals** 

- 2x120W at 4 Ohm
- Blue LED Output Level Display Power on LED Indicator 3.5mm Aux CD/MP3 Input Jack

- Treble and Bass Control
- Master Volume Control
- .
- RCA L/R Input Four Push Type Speaker L/R Terminals 110/220 Voltage Selector Dimensions: 8.27W x 2.72H x 5.39D



NEW

- 2x15W Peak at 4-ohm Compatable w/ USB Memory Sticks & MP3 Files
- Power on LED Indicator USB Reader Function •
- Master Volume Control

LED PULEPRO o 🖪 a Use a 1 D

PYLEP

- RCA Cable L/R Input Four Push Type Speaker L/R Terminals 110/220 Voltage Selector Dimensions: 5.61W x 2.17H x 4.21D

# **Mini Amplifiers**

229

6

PYLE



5-

Compatible With Any Audio/Computerize Devices (MP3) Via 3.5mm To RCA Converter. 110/220 Voltage Selector Dimensions:5.61(W) X 2.17(H) X 4.21(D)

- .

Mini 2X15 W Stereo Power Amplifier





## Mini Stereo Power Amplifier - 2 x 40 Watt with USB, AUX, CD & Mic Inputs

- RCA REC Output
- 1/4" Phone Jack 1/4" MIC Input Jack
- USB Reader Function
- Power On LED Indicator
- 110/220 Voltage Selector AUX1, AUX2, CD & RCA Inputs

- 2 x 40 Watt Peak at 4-Ohm
- Four Push Type Speaker L/R Terminals Switchable MIC Pager and Mixing Modes Switchable AUX1, AUX2, CD, USB Inputs
- Bass, Treble, Balance, Master & Mic Volume Controls
- Dimensions:7.48W x 2.72H x 5.39D



11777777

#### Stereo Power Amplifier - 2 x 120 Watt with USB, AUX, CD & Mic Inputs PTAU45

- RCA REC Output 1/4 MIC Input Jack 1/4 Headphone Jack
- USB Reader Function Power ON LED Indicator
- 2 x 120 Watt MAX Power 110/220 Voltage Selector

- AUX1, AUX2, CD, RCA Input Blue LED Output Level Display 3.5mm Aux CD/MP3 Input Jack

- Switchable AUX1, AUX2, CD/USB Input Four Push Type Speaker L/R Terminals Bass, Treble, Balance, Master Volume & MIC Controls
  - Dimensions:8.27W x 2.72H x 5.39D
- Stereo Power Amplifier 2 x 120 Watt with Blue LED Display, PTAU55 **USB/SD/MMC CARD, AUX, CD & Mic Inputs**
- Blue LED display Double-decoder MP3 function compatible
- USB flash memory reader MP3/WMA file compatibility
- RCA REC output

- 1/4 MIC input jack 1/4 Headphone output jack Power ON/OFF & output LED indicators
- Balance, treble, bass and master volume controls Mic volume control
- 3.5mm Aux CD/MP3 input jack Switchable AUX1, AUX2, CD/USB inputs Four push-type speaker L/R terminals 110/220 voltage selector

- Dimensions: 8.27W x 2.72H x 5.39D

# PCAU15A

## Mini 2x15 Watt Stereo Power Amplifier with USB/ SD Readers, AUX, CD Inputs & LED Display

- Blue LED Display for Media Playback Information Double Decoder Digital Media Function with Remote Control
- Built-in USB & SD Card Readers
- Compatible with MP3/WMA Files Power On LED Indicator
- Master Volume Control

- RCA Cable L/R Input 3.5mm/1/8 AUX Input Jack for iPod/iPhone/iPad/CD/ MP3 Players
- Four Push Type Speaker L/R Terminals 110/220 Voltage Selector
- Dimensions: 5.61W x 2.17H x 4.21D

# PCAU25A

## Mini 2x40 Watt Stereo Power Amplifier with USB/SD Card Readers, AUX/CD Inputs & LED Display

- Blue LED Screen for Media Playback Information Double Decoder Digital Media Function with Remote
- Control
- Compatible with MP3/WMA Files
- Built-in USB & SD Card Readers Power on Blue LED Circle Indicator
- Treble & Bass Control

- Master Volume Control
- RCA Cable L/R Input 3.5mm/1/8 AUX Input Jack for iPod/iPhone/iPad/CD/ 3.5mm// 1/0 Cox 4.12 MP3 Players Four Push Type Speaker L/R Terminals 110/220 Voltage Selector

#### Mini 2x75 Watt Stereo Power Amplifier with USB/SD PCAU35A Card Readers, AUX, CD Inputs & LED Display

- Blue LED Screen for Media Playback Information Double Decoder Digital Media Function with Remote
- Control
- Built-in USB/SD Memory Card Readers Compatible with MP3/WMA Files
- Power on Blue LED Circle Indicator Blue LED Output Level Indicators
- Treble, Bass, and Master Volume Controls
- RCA Cable L/R Input 3.5mm/1/8 AUX Input Jack for iPod, iPhone, iPad,
- CD/MP3 Player Four Push Type Speaker L/R Terminals Compatible with More Audio/Computer Devices via
- 3.5mm To RCA Converter 110/220 Voltage Selector
- Dimensions: 7.48W x 2.87H x 5.39D

#### Mini 2x120 Watt Stereo Power Amplifier with USB/SD PCAU46A Card Readers, AUX, CD Inputs & LED Display

- Blue LED Display for Media Playback Information Double Decoder Digital Media Function with Remote
- Control
- Built-in USB/SD Memory Card Readers
- Compatible with MP3/WMA Files Blue LED Output Level Indicators Power On/Off Switch LED Indicator

- Treble, Bass, and Master Volume Controls
- 3.5mm/1/8 AUX Input Jack for iPod/iPhone/iPad/CD/
- MP3 Players Connect More Audio/Computer Devices Via 3.5mm to RCA Converter
- Four Push Type Speaker L/R Terminals RCA Cable L/R Input Dimensions: 7.48W x 2.87H x 5.39D
- 110/220 Voltage Selector



# **Amplifiers**



- Up to 4 Separate Speaker Pairs to your Stereo System
- Accepts Speaker Wires Up to 14- Gauge Handles 100Watts Per Channel with Speaker Systems that have a Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps it Running Smoothly Individual Speaker Volume Control
- Support Two Stereo Amplifiers Frequency Response: 20Hz-20KHz

  - Dimensions: 16.92(W) x 3.03(H) x 6.29(D)
- 不
- **Digital Tuners / Speaker Selectors**
- 232



## 6 Channel High Power Stereo Speaker Selector W/Volume Control

- Up to 6 Separate Speaker Pairs to your Stereo System
- Accepts Speaker Wires Up to 14- Gauge Handles 100Watts Per Channel with Speaker Systems that have a Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps it Running Smoothly Individual Speaker Volume Control Support Two Stereo Amplifiers Frequency Response: 20Hz-20KHz

- Dimensions: 16.92(W) x 3.03(H) x 6.29(D)

PSS4

- 4 Channel High Power Stereo Speaker Selector
- Up to 4 Separate Speaker Pairs to Your Stereo System

Accepts Speaker Wires up to 14-Gauge Handles 100Watts per Channel w/ Speaker Systems

- That Have Minimun Impedance of 8 Ohms Protection Circuitry Keeps It Running Smoothly Frequency Response: 20Hz-20KHz
- - Dimensions: 7.48(W) x 1.97(H) x 4.72(D)



CONTROL CONTROL C D E F

.

平

衦



### 6 Channel High Power Stereo Speaker Selector

- Up to 6 Separate Speaker Pairs to Your Stereo
- System
- Accepts Speaker Wires up to 14-Gauge Handles 100Watts per Channel w/ Speaker Systems
- That Have Minimun Impedance of 8 Ohms Protection Circuitry Keeps It Running Smoothly Frequency Response: 20Hz-20KHz Dimensions: 9.05(W) x 1.85(H) x 5.90(D)



### 8 Channel High Power Stereo Speaker Selector

Up To 8 Separate Speakers Pair To Your Stereo System. Accepts Speaker Wires Up To 14-Gauge. Handles 100 Watts Per Channel With Speaker

Systems That Have A Minimum Impedance Of 8

twitter.com/pyleaudio

youtube.com/user/pyleaudio1

You

- Ohms Protection Circuitry Keeps It Running Smoothly Frequency Response: 20Hz-20KHz Dimensions 12.8 X 2.04 X 6.12





For more detailed product-specific information and more great models visit www.PyleAudio.com

# **Speaker Selectors**





O

...

- 5 20 Watts Speaker Indoor Ceiling Hanging Mount Power/Load Rating: 20watts Nominal Impedance: 8 Ohms 70 Volt Transformer Tapping @ 10 / 5 / 2.5

<u>a</u> <u>a</u>

- Frequency Range: 130 Hz 17 KHz PL I(@ 1w/1m): 90db Mounting Bracket & Hardware Included
- Simply Hang Speaker with Included Chain

| Model   | Size | Watt Power | Color |
|---------|------|------------|-------|
| PRJS56W | 5′′  | 20         | White |
| PRJS56B | 5′′  | 20         | Black |
| PRJS66W | 6.5″ | 40         | White |
| PRJS66B | 6.5″ | 40         | Black |

## **Ceiling Hanging Mount 5 Ball Pendent Speakers**

- Indoor Ceiling Hanging Mount Nominal Impedance: 8 Ohms Frequency Range: 180 Hz 15 KHz
- SPL(@ 1W/1m): 90db Mounting Bracket & Hardware Included

| Model  | Size | Watt Power | Color |
|--------|------|------------|-------|
| PBS50B | 5′′  | 100        | Black |
| PBS5TB | 5″   | 75         | Black |
| PBS80W | 6.5″ | 100        | White |

•



x

## Wiring Combo Speaker Systems - In-Ceiling Speaker /Volume Contro/Speaker Wall Plate Kits

- One Pair of In-Ceiling Speakers Co-axial Speakers w/ Mylar Tweeter 50 Feet of Speacially Rated 16 Gauge/ 4 Conductor Speaker Cable
- Stereo In-Wall Mounted Rotary Volume Control
- Enables the User to Control the Volume of the Room
- They are Located Provides Clean Wall Jack
- Connections for One Pair of Speakers to Your Audio System
- Model Watt Power Size PHSK1T5 5.25" 200 PHSKIT6 6.5″ 250 PHSKIT8 8.0'' 300



PCSB5

**Pair of 5** <sup>1</sup>/<sub>4</sub> **Pre-Construction Speaker Brackets** 

5 ¼ inch In-Ceiling Speaker bracket For Uses in a New Construction Projects Serves as Place Holder

Metal Wings Easy to Mount at Any Framing Situation With Virtually No Rise In Drywall Depth

# Hanging / Ceiling Speakers



For more detailed specifications, product-specific information and models visit www.PyleAudio.com





PDIC81RDSL

PDIC81RD

PDIC81RDBK

# In-Wall / In-Ceiling Flush Mount Round / Circle 2-Way Speakers

| Model      | Size  | Color  | Peak Watt Power | Speaker Type | Sold As |
|------------|-------|--------|-----------------|--------------|---------|
| PDIC51RD   | 5.25" | White  | 150             | 2-Way        | Pair    |
| PDIC51RDBK | 5.25″ | Black  | 150             | 2-Way        | Pair    |
| PDIC51RDSL | 5.25" | Silver | 150             | 2-Way        | Pair    |
| PDIC61RD   | 6.5″  | White  | 200             | 2-Way        | Pair    |
| PDIC61RDBK | 6.5′′ | Black  | 200             | 2-Way        | Pair    |
| PDIC61RDSL | 6.5′′ | Silver | 200             | 2-Way        | Pair    |
| PDIC81RD   | 8′′   | White  | 250             | 2-Way        | Pair    |
| PDIC81RDBK | 8′′   | Black  | 250             | 2-Way        | Pair    |
| PDIC81RDSL | 8′′   | Silver | 250             | 2-Way        | Pair    |
| PDIC60     | 6.5′′ | White  | 250             | 2-Way        | Pair    |
| PDIC60T*   | 6.5′′ | White  | 250             | 2-Way        | Pair    |
| PDIC80     | 8′′   | White  | 300             | 2-Way        | Pair    |
| PDIC80T*   | 8′′   | White  | 300             | 2-Way        | Pair    |
| PDICS54*   | 5′′   | White  | 100             | 2-Way        | Single  |
| PDICS64*   | 6.5′′ | White  | 150             | 2-Way        | Single  |
| PDICS82    | 8′′   | White  | 150             | 2-Way        | Single  |
| PDICS6*    | 6.5′′ | White  | 120             | 2-Way        | Single  |
| PDICS8*    | 8′′   | White  | 200             | 2-Way        | Single  |

"*\** "Symbol indicate speakers including built-in 70 Volt transformers.

# In-Wall / In-Ceiling Speakers



## In-Wall / In-Ceiling Flush Mount Round / Circle Speakers

| Model          | Size  | Peak Watt Power | Feature                 | Sold As | Color |
|----------------|-------|-----------------|-------------------------|---------|-------|
| PWRC51         | 5.25" | 200             | Weather-Proof           | Pair    | White |
| PWRC61         | 6.5″  | 300             | Weather-Proof           | Pair    | White |
| PWRC81         | 8′′   | 400             | Weather-Proof           | Pair    | White |
| PWRC52         | 5.25" | 200             | Dual Channel/Voice Coil | Single  | White |
| PWRC62         | 6.5″  | 300             | Dual Channel/Voice Coil | Single  | White |
| PWRC82         | 8′′   | 400             | Dual Channel/Voice Coil | Single  | White |
| PDPC52         | 5.25" | 150             | Dome Tweeter            | Pair    | White |
| PDPC62         | 6.5″  | 200             | Dome Tweeter            | Pair    | White |
| PDPC82         | 5″    | 250             | Dome Tweeter            | Pair    | White |
| PDPC5T*        | 5′′   | 200             | Long Throw Woofer       | Single  | White |
| PDPC6T*        | 6.5″  | 250             | Long Throw Woofer       | Single  | White |
| PDPC8T*        | 8′′   | 300             | Long Throw Woofer       | Single  | White |
| <i>PIC62A+</i> | 6.5″  | 250             | High Performance        | Pair    | White |
| PIC6E+         | 6.5″  | 250             | High Performance        | Pair    | White |
| PIC8E+         | 8′′   | 300             | High Performance        | Pair    | White |

"# "Symbol indicate speakers including built-in adjustable treble control.
"\$ "Symbol indicate speakers including built-in 70 Volt transformers.

# In-Wall / In-Ceiling Speakers



For more detailed specifications, product-specific information and models visit www.PyleAudio.com







PDIW65


PDIW65BK

PDIW65SL

# In-Wall / In-Ceiling Flush Mount Square / Rectangle Speakers / Subwoofers

| Model         | Size   | Peak Watt Power | Feature              | Sold As | Color  |
|---------------|--------|-----------------|----------------------|---------|--------|
| PDIW52        | 5.25"  | 200             | Dome Tweeter         | Pair    | White  |
| PDIW62        | 6.5″   | 250             | Dome Tweeter         | Pair    | White  |
| <i>PDIW55</i> | 5.25"  | 150             | Dome Tweeter         | Pair    | White  |
| PDIW55BK      | 5.25"  | 150             | Dome Tweeter         | Pair    | Black  |
| PDIW55SL      | 5.25"  | 150             | Dome Tweeter         | Pair    | Silver |
| PDIW65        | 6.5″   | 200             | Polymer Tweeter      | Pair    | White  |
| PDIW65BK      | 6.5″   | 200             | Polymer Tweeter      | Pair    | Black  |
| PDIW65SL      | 6.5″   | 200             | Polymer Tweeter      | Pair    | Silver |
| PDIWCS56      | 5.25"  | 300             | Long Throw Woofer    | Single  | White  |
| PDIWCS56BK    | 5.25″  | 300             | Long Throw Woofer    | Single  | Black  |
| PDIWCS56SL    | 5.25″  | 300             | Long Throw Woofer    | Single  | Silver |
| PDIW57        | 5″     | 300             | Long Throw Woofer    | Pair    | White  |
| PDIW67        | 6.5″   | 360             | Long Throw Woofer    | Pair    | White  |
| PDIW87        | 8′′    | 400             | Long Throw Woofer    | Pair    | White  |
| PDIWCS62      | 6.5″   | 360             | Electronic Crossover | Single  | White  |
| PDIC65SQ      | 6.5″   | 200             | Dome Tweeter         | Pair    | White  |
| PDIWS8        | 8''    | 300             | Subwoofer            | Single  | White  |
| PDIWS10       | 10′′   | 360             | Subwoofer            | Single  | White  |
| PDIWS12       | 12''   | 400             | Subwoofer            | Single  | White  |
| PDIWS28       | 8″ x 2 | 600             | Dual Subwoofers      | Single  | White  |

# In-Wall / In-Ceiling Speakers / Subwoofers

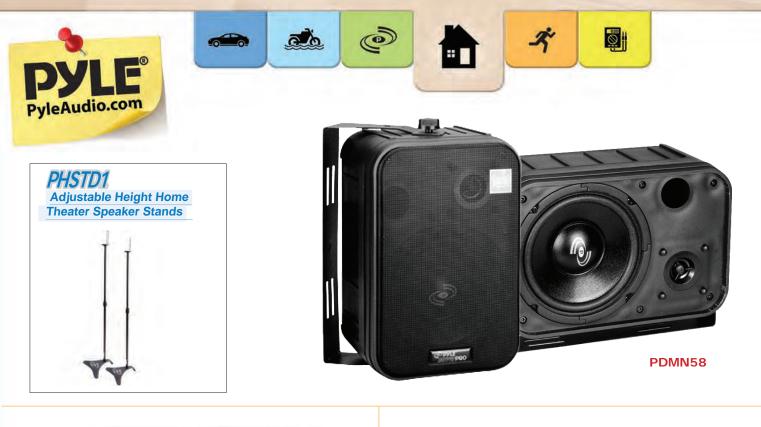



PCB4WT

## **Bookshelf / Wall Mount Speakers**

| Model  | Size  | Peak Watt Power | Feature           | Sold As | Color |
|--------|-------|-----------------|-------------------|---------|-------|
| PCB3BK | 3''   | 100             | Mini Speakers     | Pair    | Black |
| PCB3WT | 3''   | 100             | Mini Speakers     | Pair    | White |
| PCB4BK | 4''   | 200             | Full Range        | Pair    | Black |
| PCB4WT | 4''   | 200             | Full Range        | Pair    | White |
| PDMN38 | 3.5″  | 300             | Long Throw Woofer | Pair    | Black |
| PDMN48 | 5″    | 400             | Long Throw Woofer | Pair    | Black |
| PDMN58 | 6.5″  | 500             | Long Throw Woofer | Pair    | Black |
| PDMN68 | 8''   | 400             | Long Throw Woofer | Pair    | Black |
| PDWT5* | 5.25" | 35              | PA Speaker        | Single  | White |
| PDWT6* | 6.5″  | 50              | PA Speaker        | Sinle   | White |

"*\** "Symbol indicate speakers including built-in 70 Volt transformers.

# **Bookshelf / Wall Mount Speakers**









# Weather Proof Indoor / Outdoor Wall Mountable Speakers

| Model   | Size    | Peak Watt Power | Feature           | Sold As | Color |
|---------|---------|-----------------|-------------------|---------|-------|
| PDWP5BK | 5″      | 150             | Crossover Network | Pair    | Black |
| PDWP5WT | 5″      | 150             | Crossover Network | Pair    | White |
| PDWR30B | 3.5″    | 300             | Long Throw Woofer | Pair    | Black |
| PDWR30W | 3.5″    | 300             | Long Throw Woofer | Pair    | White |
| PDWR40B | 5.25"   | 400             | Long Throw Woofer | Pair    | Black |
| PDWR40W | 5.25"   | 400             | Long Throw Woofer | Pair    | White |
| PDWR50B | 6.5″    | 500             | Long Throw Woofer | Pair    | Black |
| PDWR50W | 6.5″    | 500             | Long Throw Woofer | Pair    | White |
| PDWR33  | 3.5″    | 200             | Dome Tweeter      | Pair    | White |
| PDWR53  | 5.25″   | 250             | Dome Tweeter      | Pair    | White |
| PDWR63  | 6.5″    | 350             | Dome Tweeter      | Pair    | White |
| PDWR3T* | 3.5″    | 200             | Long Throw Woofer | Pair    | White |
| PDWR5T* | 5.25"   | 250             | Long Throw Woofer | Pair    | White |
| PDWR6T* | 6.5″    | 350             | Long Throw Woofer | Pair    | White |
| PDWR68B | 3″ x 3  | 500             | Wide Angle Sound  | Pair    | Black |
| PDWR68W | 3′′ x 3 | 500             | Wide Angle Sound  | Pair    | White |

"*\** "Symbol indicate speakers including built-in 70 Volt transformers.

# Weather Proof Indoor / Outdoor Speakers



# Indoor / Outdoor PA Horn Speakers

| Model    | Size   | Watt Power | Ohms | Transformer | Color |
|----------|--------|------------|------|-------------|-------|
| PHSP10TA | 5.6"   | 10         | 8    | 70V         | White |
| PHSP4    | 6''    | 50         | 8    | -           | White |
| PHSP5    | 8′′    | 65         | 8    | -           | White |
| PHSP6K   | 6.3''  | 25         | 8    | -           | Grey  |
| PHSP8K   | 8.1"   | 50         | 8    | -           | Grey  |
| PHSP30TA | 9.4"   | 30         | 8    | 70V         | White |
| PHSP101T | 9.7″   | 20         | 8    | 70V         | Grey  |
| PHSP121T | 11′′   | 30         | 8    | 70V         | Grey  |
| PHSP12   | 12.7'' | 60         | 16   | 70-100V     | Grey  |
| PHSP131T | 13.5″  | 50         | 8    | 70V         | Grey  |
| PHSP16   | 16"    | 80         | 16   | 70-100V     | Grey  |
| PHSP20   | 19.5"  | 100        | 16   | 70-100V     | Grey  |

**Indoor / Outdoor PA Horn Speakers** 

| Model                                      | Size | Watt Power          | Amp Class                 | Dimensions         |                                    |
|--|------|---------------------|---------------------------|--------------------|------------------------------------|
| PDSB10A                                    | 10'' | 100                 | AB                        | 11.8 x 16.5 x 13.8 |                                    |
| PDSB12A                                    | 12'' | 150                 | AB                        | 14.0 x 18.1 x 15.7 |                                    |
| PDSB15A                                    | 15′′ | 250                 | Н                         | 19.7 x 21.2 x 19.7 | str                                |
|  |      |                     |                           |                    | VOLUME<br>BD                       |
| PVCKT5<br>Wall Mount Rotary Volume Control |      | <b>PVC</b><br>Right | D15<br>and Left Speaker D | ual Knob           | <b>PVCS2</b><br>In-Wall A/B Source |
| Knob (3 Color Wa                           |      |                     | endent Volume Con         | Selector Switch    |                                    |



PVCS5

In-Wall A/B Speaker/ Source Switch DEExina Deexina Ververo Vorone

PVC8U

In-Wall Music Amp with iPod/ MP3 Player Input, USB/SD Card Readers & LCD Display





**PVC10ABT** 

Bluetooth Streaming Music Amp with iPod/MP3 Input, USB/SD Card Readers




# Theater Subwoofers / Wall Plates / In-Wall Control



**Steam Cleaners / Steam Press** 



Going abroad ? Plan on using your computer, cell phone, hair dryer, other gadget or appliance? The PVTC series step up/down voltage transformers offer you a safe, dependable, cost-effective and easy solution to converting voltages from 110-120 volts up to 220-240 volts or from 220-240 volts down to 110-120 volts for both home use and commercial applications. The PVTC series come available with efficient and high-power handling ratings, heavy-duty power cord, standard US 3-prong plug, and an American to European outlet adaptor. Additional features include 5V standard USB jack for easy charging smaller devices, ability for outputs to be used simultaneously & continuously and fuse protection. Visit PyleAudio.com and search the model number to learn more!



- On/Off switch with indicator lam
- . Analog voltage meter
- . Integrated automatic
- Dimensions: 8"H X 14"L X 13"W
- Product Weight: 26 Lbs



# *PVAR5000*

## 5000 Watt Step Up and Step Down Voltage Converter Transformer - AC 110/220V

- Converts 110/120V to 220/240V OR converts 220/240V to 110/120V
- 5 outlets located on front (outlets accept 3 or 2 prong US plugs and 2 prong Euro/Asian plugs)
- Voltage Converter/Trans-
- former with Stabilizer, good

voltage supply Heavy duty metal casing and durable design, Easy to carry with attached handle On/Off switch with

for countries with unstable

- indicator lamp
- Dimensions: 14.76"H x 15.55"L x 10.43"W



PVKT130

## Travel Voltage Converter Transformer 50-1600 Watt Kit with Worldwide Socket Plug Adapters Step Down 220/240V to 110/120V

- Use your appliances worldwide Lets you use U.S. 110/120 Volt appli-
- ances in 220/240 Volt outlets Allows your electronic devices to be
- plugged into outlets in other countries Includes (1) selectable watt
- converter with 6 adapter plugs
- Adapters are compatible in over
- 150 countries worldwide
- Includes travel case with color-coded map to show each adaptor's compatibility locations
- Perfect for vacations, business trips, traveling, etc.



**Step Up - Step Down / Voltage Converters** 



## **Digital Multimeters**

|     | Model  | Description  |
|-----|--------|--|
| NEW | PDMT28 | Digital Backlit LCD Multimeter, AC, DC, Volt, Current, Resistance, Transistor and Range - Protective Rubber Case |
| NEW | PDMT29 | Digital LCD Multimeter, AC, DC, Volt, Current, Resistance, and Range - Rubber Case And Stand                     |
| NEW | PDMT38 | Digital LCD AC, DC, Volt, Current, Resistance, and Range Multimeter - Rubber Case, Test Leads And Stand          |
| NEW | PLTM35 | Mini Digital LCD Multimeter Measures DC Voltage, AC Voltage, DC Current, Resistance and Diode Levels             |
| NEW | PLTM40 | Digital Backlit LCD Multimeter for AC, DC, Volt, Current, Resistance, Transistor and Range Measurement           |
|     | PCMT20 | Digital AC/DC Auto-Ranging Clamp Meter   |



# Network / Cable / Telephone Line / HDMI Testers

|     | Model          | Description  |
|-----|----------------|--|
|     | PHCT45         | Network Cable Tester   |
|     | PHCT55         | Telephone Wire Cable Tester For Testing Continuity with Sender and Receiver                          |
|     | PHCT65         | LAN/Ethernet/Telephone Cable Tracker & Tester  |
| NEW | PHCT70         | Network Cable Tester for UTP, STP, BNC Coaxial, Telephone Continuity, Short Circuit, Open Connection |
| NEW | PHCT85         | HDMI High Definition Cable Tester  |
| NEW | <i>РНСТ205</i> | Network Cable Tester for UTP, FTP, BNC Coaxial, Telephone Continuity, Short Circuit, Open Connection |

# Multimeters / Network & Cable Testers



PMD24

## Voltage / Metal / Stud Detectors and Electrical Testers

|     | Model        | Description  |  |
|-----|--------------|--|--|
| NEW | PMD24        | Handheld Stud / Metal/ Voltage Detector W/ Sensitivity Adjustment, Center Location, LED & Audible Alerts |  |
| NEW | PMD43        | Handheld Metal/Voltage Detector W/ LED And Sound Alert, Sensitivity Adjustment                           |  |
| NEW | <i>PTV17</i> | Voltage Detector W/ LED And Sound Alert, 90 ~ 1000V AC, IP54 and IEX1010 Rated                           |  |
|     | PDT35        | Electrical Tester For Voltage and Continuity   |  |











PCTL01

## **Digital Temperature / Humidity Meters and Thermometers**

|     | Model  | Description   |
|-----|--------|---|
| NEW | PIRT25 | Compact Infrared Thermometer With Laser Targeting                           |
| NEW | PIRT30 | High Temperature Infrared Thermometer with Type K Input                     |
|     | PMIR15 | Mini Infrared Thermometer with Laser Pointer                                |
| NEW | PTHM15 | Mini Temperature and Humidity Meter With Dew Point and Wet Bulb Temperature |
|     | PTHM20 | Temperature and Humidity Meter With Dew Point and Wet Bulb Temperature      |
|     | PHHT15 | Indoor Digital Hygro-Thermometer  |
|     | PCTL01 | Pipe Clamp Temperature Lead   |

# Voltage / Metal / Temperature / Humidity

| <b>DY</b><br>yleAud | LE <sup>®</sup><br>io.com |   |
|---------------------|---------------------------|---|
|                     | Digital An                | PMA82 PMA85 PMA85                         |
|                     | Digital An<br>Model       | DMAGO                                     |
| NEW                 |                           | emometers PMA82 PMA85 PMA90               |
| NEW                 | Model                     | emometers PMA82 PMA85 PMA9 PMA9 PMA9 PMA9 |





# Digital Lux / Light Meters

|     | Model         | Description   |
|-----|---------------|---|
| NEW | <i>PLMT12</i> | Handheld Lux Light Meter Photometer - 20,000 Lux range, 2x Per Second Sampling  |
| NEW | PLMT15        | Handheld Lux Light Meter Photometer - 200,000 Lux Range, 2X Per Second Sampling |
| NEW | <b>PLMT21</b> | Handheld Lux Light Meter Photometer - 20,000 Lux range, 2x Per Second Sampling  |







# **Digital Tachometers**

|     | Model        | Description  |  |
|-----|--------------|--|--|
| NEW | <i>PLT26</i> | Professional Digital Non Contact Laser Tachometer - LCD Display, 99,999 RPM Range      |  |
| NEW | PST30        | Digital LED Non Contact Stroboscope Tachometer - Backlit LCD Display, 19,999 RPM Range |  |
| NEW | <i>PST43</i> | Precision Non-Contact Laser Tachometer - Extended RPM Range, Digital LCD Screen        |  |

# Anemometer / Tachometer / Light Meters

| 8888   | NEW 3058 |        |  |
|--------|----------|--------|--|
| PCMM05 | PMD74    | PDMM15 |  |

## Manometers / Carbon Monoxide / Microwave Leakage Meters

| NEW | Model         | Description                                |
|-----|---------------|--|
|     | PCMM05        | Carbon Monoxide Meter                      |
|     | PMD74         | Microwave Leakage Detector                 |
|     | PDMM01        | Digital Manometer with 11 Units of Measure |
|     | <i>PDMM15</i> | Digital Manometer - Pressure Measuring     |



## **Digital Sound Level Meters**

|     | Model  | Description  |
|-----|--------|--|
| NEW | PSPL01 | Mini Digital Sound Level Meter                     |
| NEW | PSPL03 | Mini Sound Level Meter with A Frequency Weighting  |
| NEW | PSPL25 | Sound Level Meter with A and C Frequency Weighting |



## **Digital Laser Distance Meters**

|     | Model         | Description  |  |
|-----|---------------|--|--|
| NEW | <i>PLDM18</i> | Handheld Laser Distance Meter - Backlit LCD Display, Direct / Indirect, Volume, Area Measuring |  |
| NEW | PLDM22        | Handheld Laser Distance Meter - Backlit LCD Display, Direct / Indirect, Volume, Area Measuring |  |

# Manometers / Sound / Distance Meters

For more product-specific information and more great models visit:







1600 63rd Street . Brooklyn . NY 11204 . 718 535-1800 . Fax: 718 236-2400